




Buick LaCrosse eAssist
4 Door Sedan
2018 - 2019

First Responder
Rescue Sheet

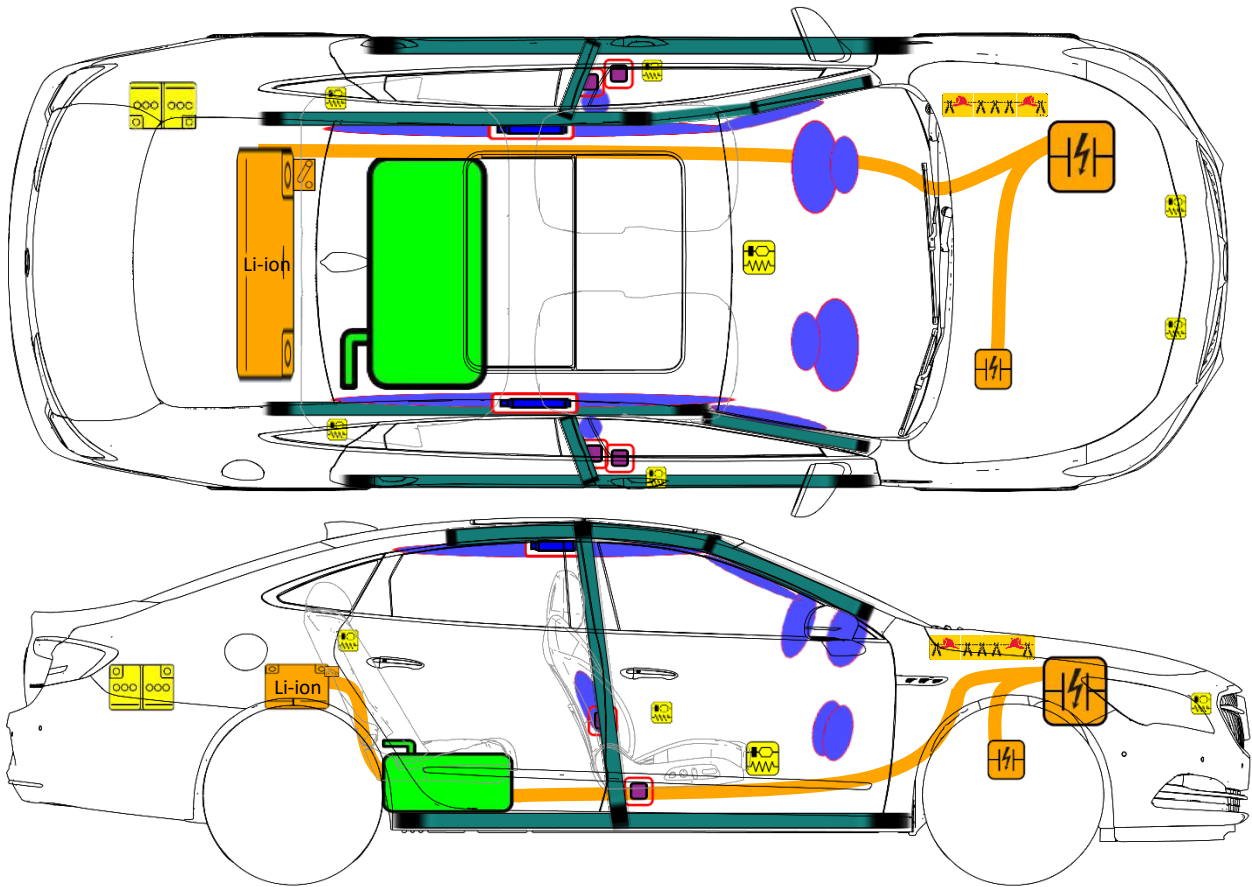

	Air Bag		Stored Gas Inflator		Seat Belt Pretensioner		SRS Control Unit		
			Gas Strut/Preloaded Spring		High Strength Zone				
	Battery Low Voltage				Fuel Tank				
	High Voltage Battery Pack		High Voltage Power Cable		High Voltage Disconnect				Ultra Capacitor, High Voltage



Buick LaCrosse eAssist 4 Door Sedan 2018 - 2019


First Responder Rescue Sheet

The Buick LaCrosse with eAssist technology incorporates a low voltage battery that must be disconnected prior to occupant extrication.

To Disable the Vehicle:

1. Turn the ignition to "OFF" and remove the keys from the vehicle.
2. Double cut all low voltage cables marked by the yellow tape located near the fuse block on the left side of the engine compartment.

Do NOT cut any Orange colored High Voltage Cables.

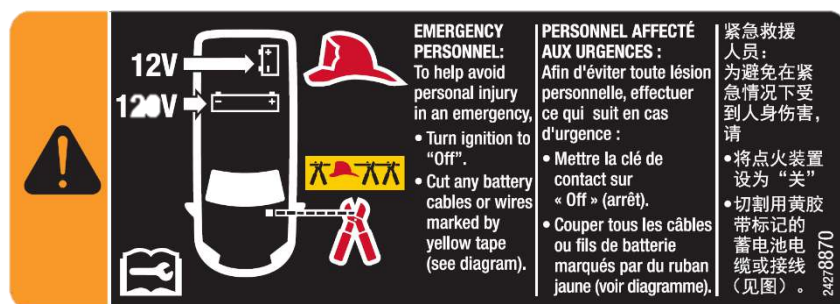

Air Bag Caution

After disabling 12 volt power, wait at least 10 seconds to allow any un-deployed airbag reserve energy to dissipate.

In Case of Fire

A battery on fire will not explode. If battery cells reach high enough temperature, they vent and release electrolyte. Battery electrolyte is flammable. Use copious amounts of water to cool the battery to extinguish the fire. Do not use an ABC dry chemical extinguisher because it will not extinguish a battery fire.

In Case of Water Immersion

The high voltage battery is isolated from the vehicle chassis. If the vehicle is immersed in water, you will not be electrocuted by touching the vehicle.