



# FORD E-Transit

2022 - 2025

## INFORMATION FOR FIRST AND SECOND RESPONDERS

### EMERGENCY RESPONSE GUIDE



**FORD E-TRANSIT**

**ELECTRIC**





# FORD E-Transit

2022 - 2025

## CONTENTS


|                                                       |                |
|-------------------------------------------------------|----------------|
| <b>1. Identification / recognition</b>                | <b>Page 4</b>  |
| <b>2. Immobilization / stabilization / lifting</b>    | <b>Page 7</b>  |
| <b>3. Disable direct hazards / safety regulations</b> | <b>Page 14</b> |
| <b>4. Access to the occupants</b>                     | <b>Page 27</b> |
| <b>5. Stored energy / liquids / gases / solids</b>    | <b>Page 36</b> |
| <b>6. In case of fire</b>                             | <b>Page 37</b> |
| <b>7. In case of submersion</b>                       | <b>Page 41</b> |
| <b>8. Towing / transportation / storage</b>           | <b>Page 42</b> |
| <b>9. Important additional information</b>            | <b>Page 46</b> |
| <b>10. Explanation of pictograms used</b>             | <b>Page 46</b> |





# FORD E-Transit

2022 - 2025

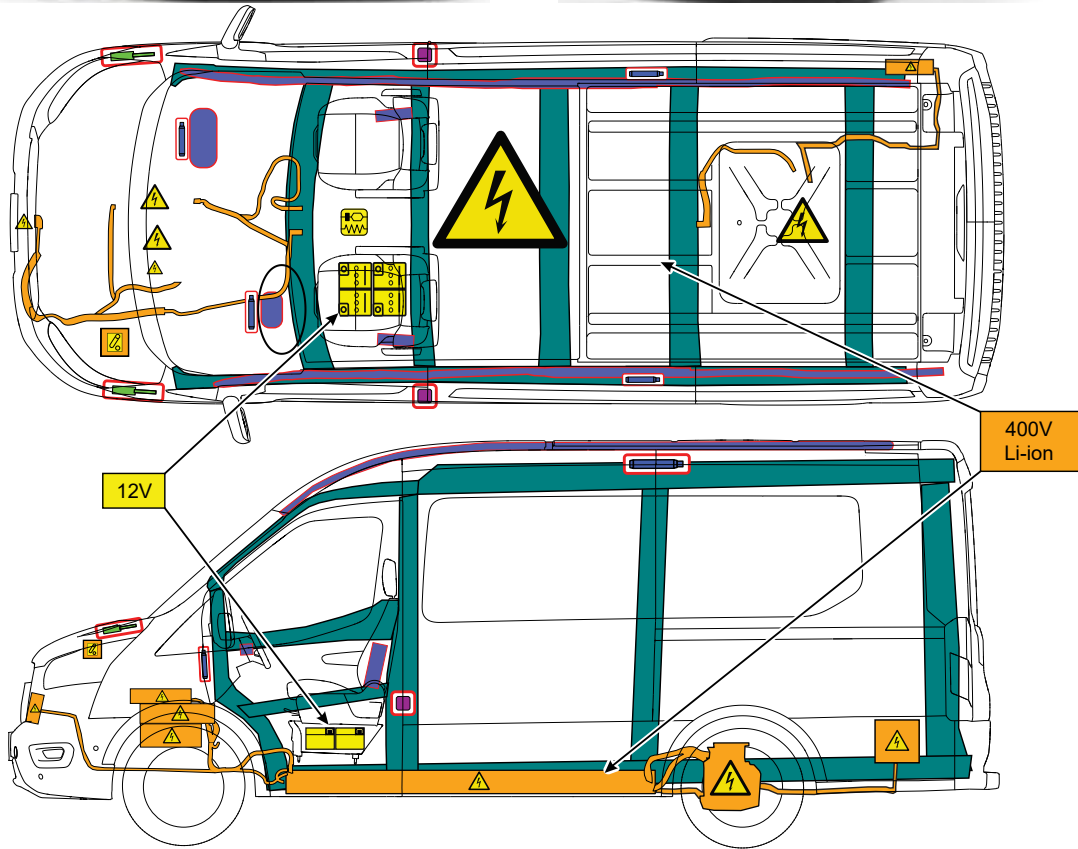

|  |                        |  |                           |  |              |  |                                |  |                                  |
|--|------------------------|--|---------------------------|--|--------------|--|--------------------------------|--|----------------------------------|
|  | Airbag                 |  | Structural Reinforcements |  | Control unit |  | High-voltage battery           |  | High-voltage disconnection point |
|  | Gas generator          |  | Gas filled spring device  |  | Battery      |  | High-voltage wire / components |  | Seat belt tensioner              |
|  | High-Voltage component |  |                           |  |              |  |                                |  |                                  |





# FORD E-Transit

2022 - 2025

## 1. Identification / recognition



ELECTRIC VEHICLES DO NOT HAVE ENGINE NOISE. LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.



1. Vehicle Identification Number (VIN)
2. Charging port and blue striping on front grill.
3. E-Transit badging on driver's side rear door.

### Vehicle Identification Number (VIN) Layout

The 8th position of the VIN identifies the vehicle's engine type as electric.

- K - BEV (Electric Motor #1)
- M - BEV (Electric Motor #2)






# FORD E-Transit

2022 - 2025

## Keys

**Key Fob** - The key fob can be used to access various vehicle systems. The key fob buttons should be used as shown below.



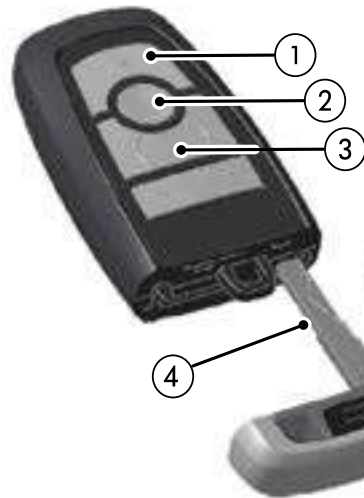


1. Unlock - Press the button to unlock all doors.

2. Lock - Press the button to lock all doors.

3. Panic Alarm - Press the button to sound the panic alarm.

4. Key Blade or Flip Key - Push the release button on the passive key to remove the key blade or open the flip key.



**Phone as a Key** - Phone as a key allows use of a smart phone in place of a passive key. Bluetooth® connection must be enabled. A phone can be used for the following functions:

- Remote locking and unlocking
- Passive entry and exit
- Passive start and drive the vehicle
- Remote start
- Memory function recall






# FORD E-Transit

2022 - 2025

## Instrument Cluster

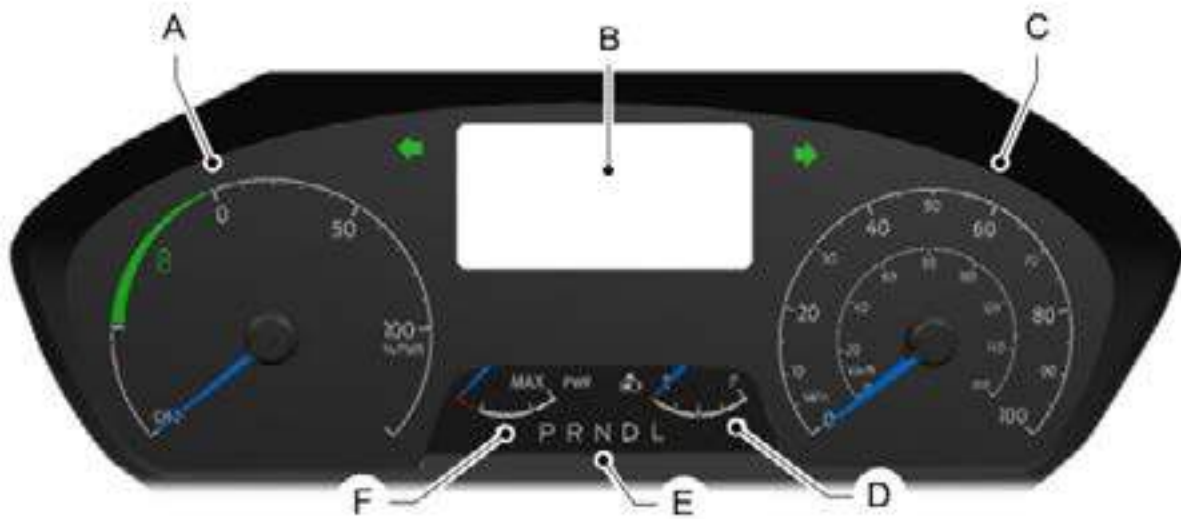

- A - Power gauge
- B - Instrument cluster display
- C - Speedometer
- D - High voltage battery gauge
- E - Automatic transmission position indicators
- F - Power availability





# FORD E-Transit

2022 - 2025

## 2. Immobilization / stabilization / lifting



**DO NOT JACK ON THE BATTERY CRADLE OR HV BATTERY TRAY. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN DAMAGE AND SERIOUS PERSONAL INJURY.**




**The High Voltage battery may not be used for lifting or stabilization. Damage to the battery pack may occur**



Service of the high voltage system on this vehicle is restricted to qualified personnel. The required qualifications vary by region. Always observe local laws and legislative directives regarding electric vehicle service. Failure to follow this instruction may result in serious personal injury or death.



Use caution to ensure you never come into contact with the high voltage battery or other high voltage components while lifting or manipulating the vehicle.

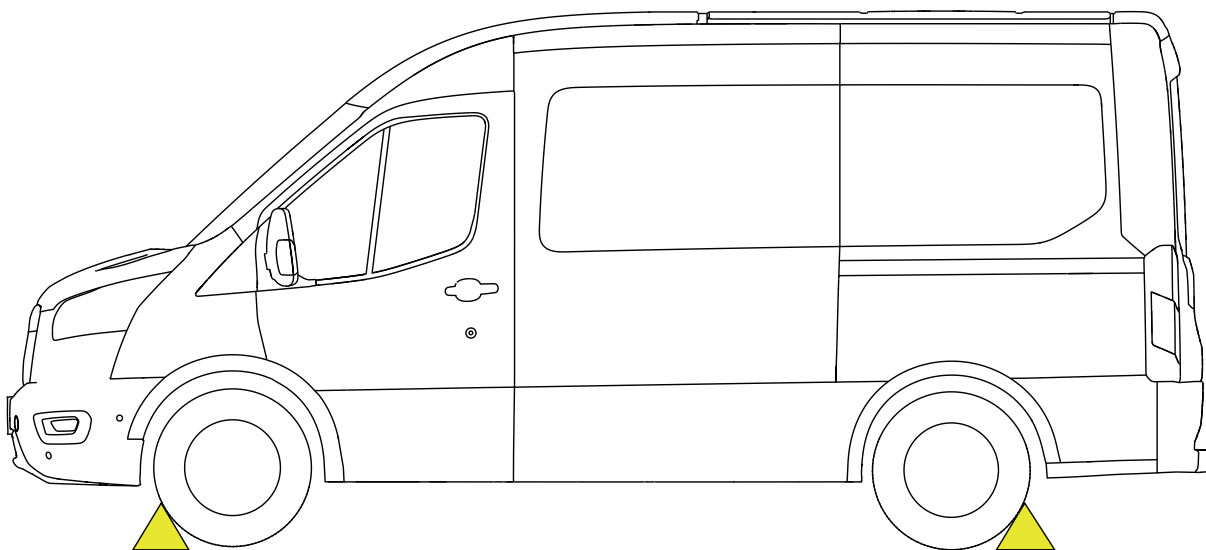

1. Position Wheel And Tire Chocks to prevent vehicle movement.





# FORD E-Transit

2022 - 2025

**NOTICE:** The electric parking brake does not operate if the vehicle battery has run out of charge.

**NOTE:** The red warning lamp flashes during operation and illuminates when the parking brake is applied.

**NOTE:** You can apply the electric parking brake when the power is off.

**NOTE:** The electric parking brake could apply when you shift into park (P).

2. Put vehicle into Park position (1), ensure that the parking brake is engaged (2).



3. Shut vehicle off with the push button. Remove the key or PAAK (Phone As A Key) from the vehicle to prevent vehicle from turning back on.

4. Approach vehicle from the side to avoid the potential travel path.








# FORD E-Transit

2022 - 2025

## STABILIZATION / LIFTING POINTS

When lifting or stabilizing only use the designated lift areas, as shown.

### VEHICLES WITH MEDIUM WHEELBASE [MWB]:




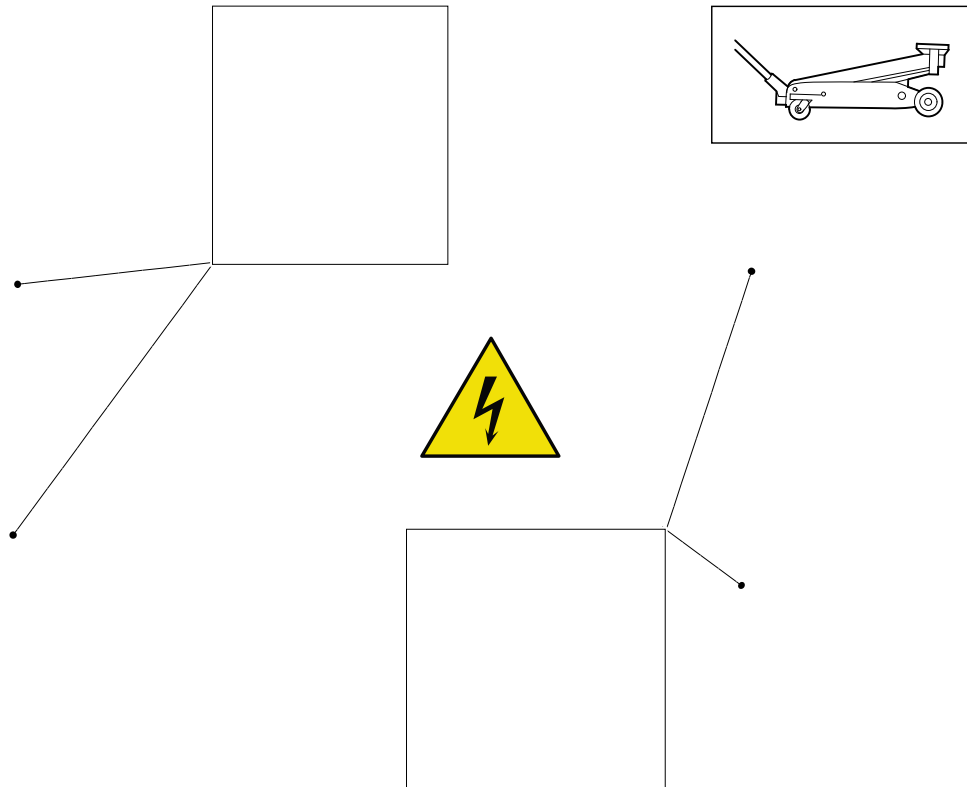




# FORD E-Transit

2022 - 2025

VEHICLES WITH MEDIUM WHEELBASE [MWB] - VAN, BUS, KOMBI










# FORD E-Transit

2022 - 2025

VEHICLES WITH LONG WHEELBASE [LWB] - VAN, BUS, KOMBI









# FORD E-Transit

2022 - 2025

VEHICLES WITH EXTRA LONG WHEELBASE [LWB-EL] - SINGLE CHASSIS CAB AND JUMBO










# FORD E-Transit

2022 - 2025

VEHICLES WITH EXTRA LONG WHEELBASE [LWB-EL] - SINGLE CHASSIS CAB AND JUMBO

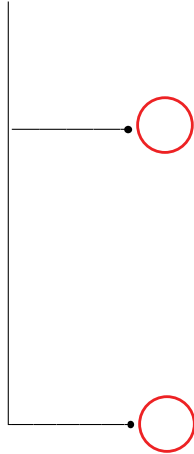



# FORD E-Transit

2022 - 2025

## 3. Disable direct hazards / safety regulations



To prevent the risk of high-voltage shock, always follow precisely all warnings and service instructions to depower the system. The high-voltage system utilizes high-voltage cables to its components and modules. The high-voltage cables and wiring are identified by orange harness tape or orange wire covering. All high-voltage components are marked with high-voltage warning labels with a high-voltage symbol. Failure to follow these instructions may result in serious personal injury or death.



**DEPOWERING THE HIGH VOLTAGE SYSTEM DOES NOT DISSIPATE VOLTAGE INSIDE THE BATTERY, THE BATTERY PACK REMAINS LIVE AND DANGEROUS. CONTACT WITH THE HIGH VOLTAGE BATTERY PACK INTERNALS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.**




Make sure to use any low voltage item before cutting or disconnecting the 12-volt battery, **ONLY** if it is safe to do so and may aid in access to the victim(s). This includes, but is not limited to, emergency brake, power seats and windows.

### FRUNK OPENING PROCEDURES

Manually Opening the Frunk from inside the vehicle:

1. Pull the frunk release lever.

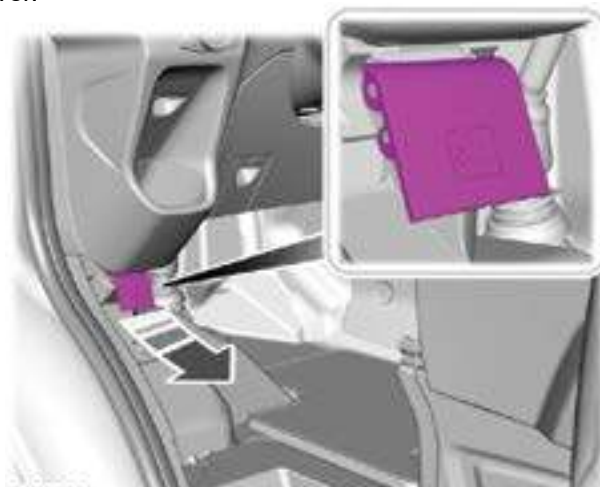




# FORD E-Transit

2022 - 2025

2. Slightly lift the frunk.
3. Move the catch to the left.

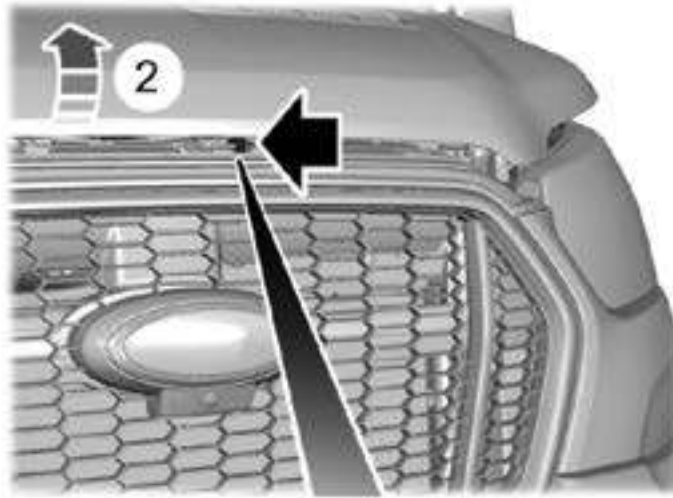

4. Open the frunk and support it with the strut.





# FORD E-Transit

2022 - 2025

## HIGH VOLTAGE SYSTEM DISABLE PROCEDURE

### IMPORTANT:


- Under urgent situations perform Option 1.
- Under non-urgent situations perform Option 2.

### OPTION 1 - Under urgent situations ONLY

1. Open the hood and locate the Low Voltage Service Disconnect.



2. Cut the wires and remove the Low Voltage Service Disconnect. Isolate the wires to prevent reconnection.

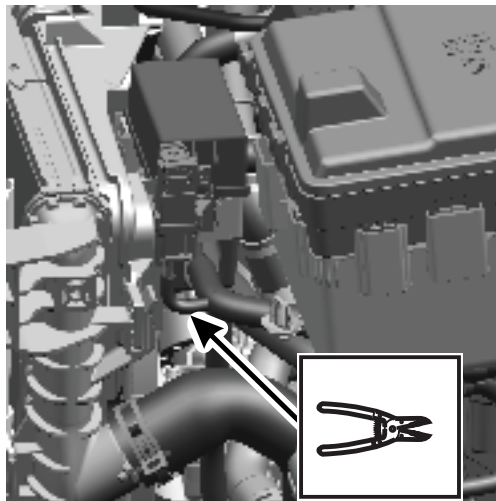





# FORD E-Transit


2022 - 2025

## 12 Volt and Auxiliary Battery Disconnect - Disables Safety Restraint System (SRS)


3. Raise and position the LH front seat forward.



4. Release the retainers and remove the LH front seat rear trim panel.

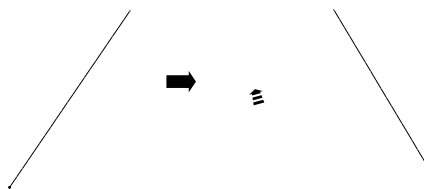

5. Position the LH front seat backrest cover to release a retainer (1). Position the LH front seat backrest cover.






# FORD E-Transit

2022 - 2025

6. Position the battery cover insulator (1). Remove the battery disconnect access cover (2).



7. Locate and cut the negative battery cable to ground at two locations 3 in (7.6 cm) apart from each other. Isolate cable to prevent reconnection.

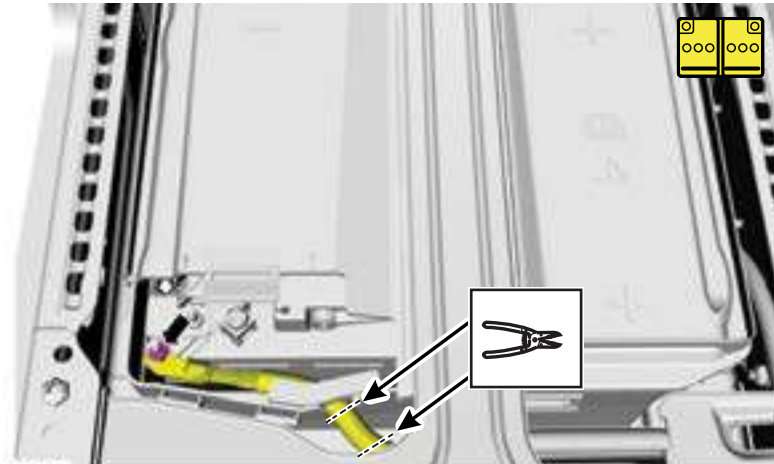




# FORD E-Transit

2022 - 2025

## Emergency Release During Charging

1. Attempt to de-power the charging unit.
2. Detach the manual charge cord release cable tab from the degas bottle.
3. Pull the manual charge cord lock actuator release cable tab.
4. Disconnect the EVSE charge cord from the vehicle.

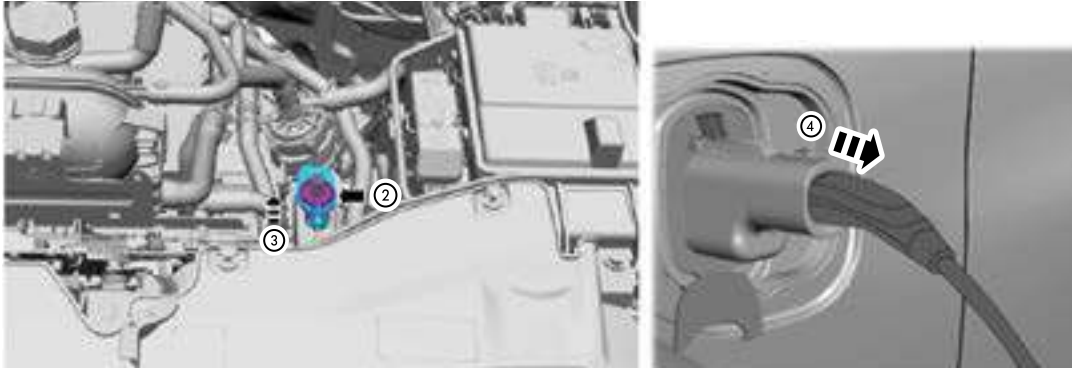

## OPTION 2 - Under non-urgent situations

1. Ensure the vehicle transmission gear selector is in the PARK position (1). Ensure the parking break is engaged (2).







# FORD E-Transit

2022 - 2025

Ensure that the Pro Power Onboard (PPO) System, if equipped, has been deactivated by following the steps below:

2. Vehicle must be powered down for AT LEAST 60 seconds before continuing the procedure.
3. Locate the 3 outlet locations on the vehicle. The outlets are in the front and rear.

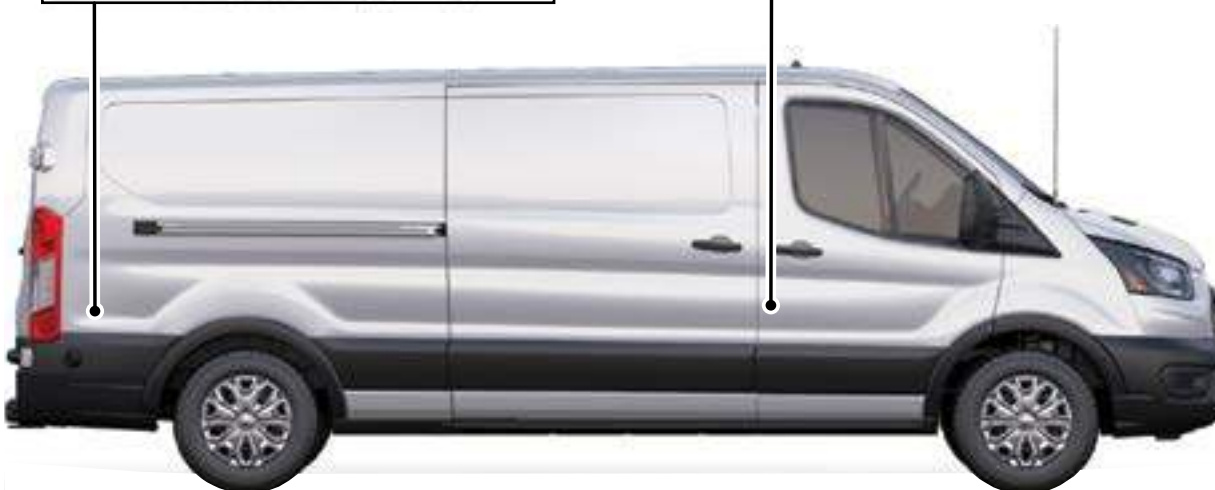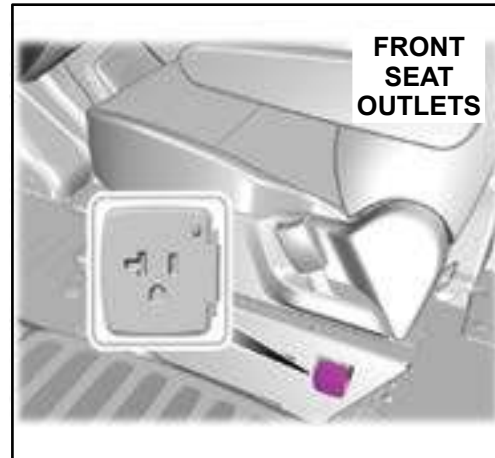




## FORD E-Transit

2022 - 2025

4. Verify that the PPO System is deactivated by checking that the LED indicators are deluminated.
5. If the PPO system is still active, press the PPO power button. Pressing the button will deactivate the entire PPO system.
6. Wait at least 60 seconds for PPO system to be depowered.

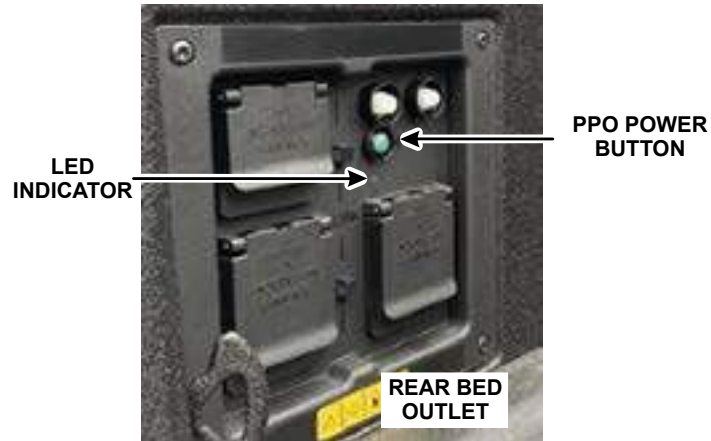




# FORD E-Transit

2022 - 2025

## Low Voltage Service Disconnect (Disables High Voltage System)


7. Open the hood.

8. Release the Connector Position Assurance (CPA) clip.

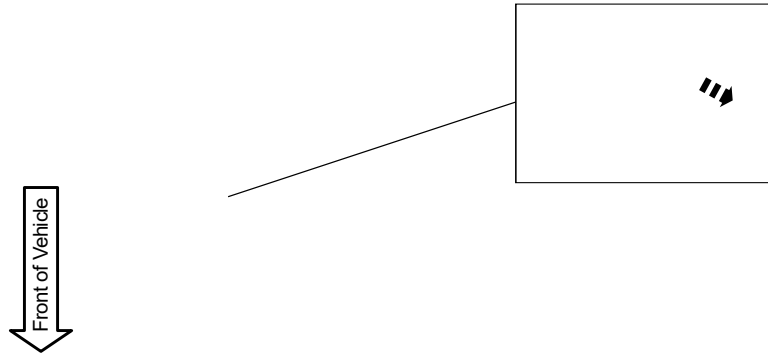

9. **NOTE:** The tab must be depressed prior to pushing the connector back in or damage to the connector may result.

Depress the tab while pulling the connector until the hole is completely visible on the top of the connector.



10. Insert a suitable tool inside the connector hole to prevent the connector from closing.



11. Disconnect the low voltage electrical connector at the High Voltage Battery.

12. Disconnect the high voltage electrical connectors at the High Voltage Battery.

13. Wait a minimum of 5 minutes.





# FORD E-Transit


2022 - 2025

## 12 Volt and Auxiliary Battery Disconnect - Disables Safety Restraint System (SRS)


1. Raise and position the LH front seat forward.



2. Release the retainers and remove the LH front seat rear trim panel.

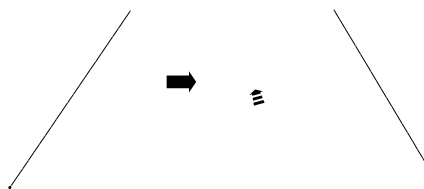

3. Position the LH front seat backrest cover to release a retainer (1). Position the LH front seat backrest cover.







## FORD E-Transit

2022 - 2025


4. If equipped, remove the battery cover insulator.

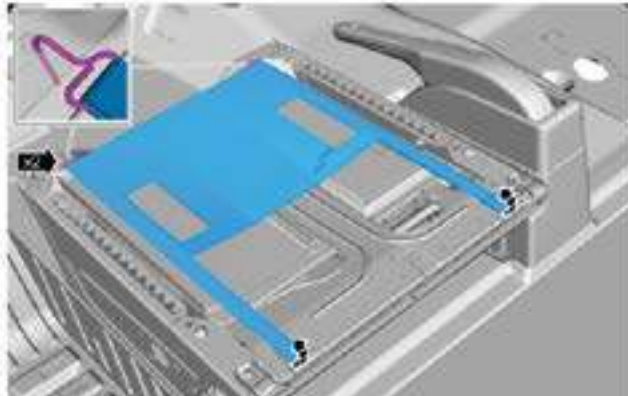

5. Remove the bolts and position the battery hold-down bracket.

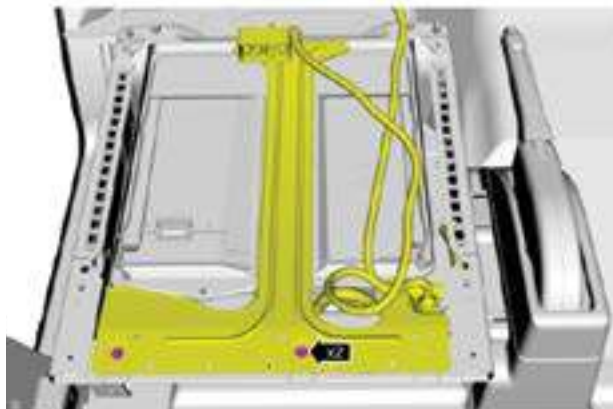

6. Release the wire harness retainers from the battery hold-down bracket.

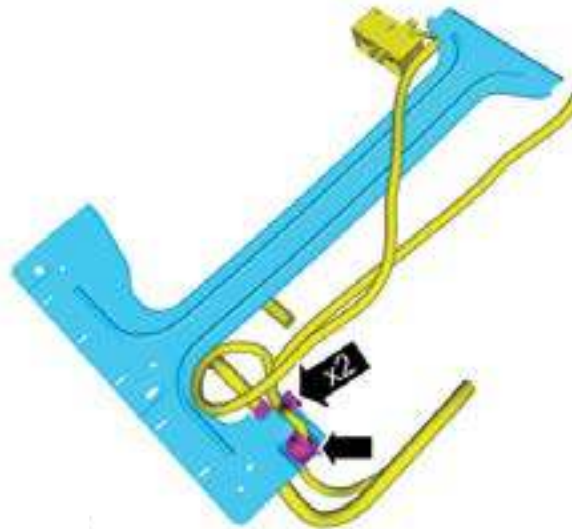





# FORD E-Transit

2022 - 2025

7. Raise and position the LH front seat rearward.



8. Remove the LH front seat track stop bolt covers and the bolts.

**NOTE:** Do not remove the seat track mounting bolts.



9. Raise and position the LH front seat forward.







## FORD E-Transit

2022 - 2025


10. Release the battery cover latch (1). Pull the battery cover rearward and remove the battery cover (2).

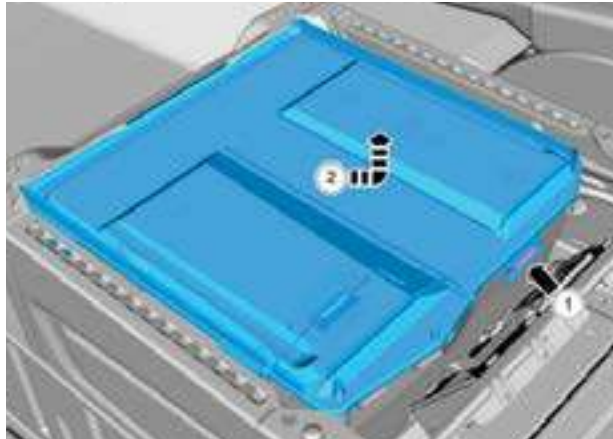

11. Loosen the nuts and position the negative battery cables.

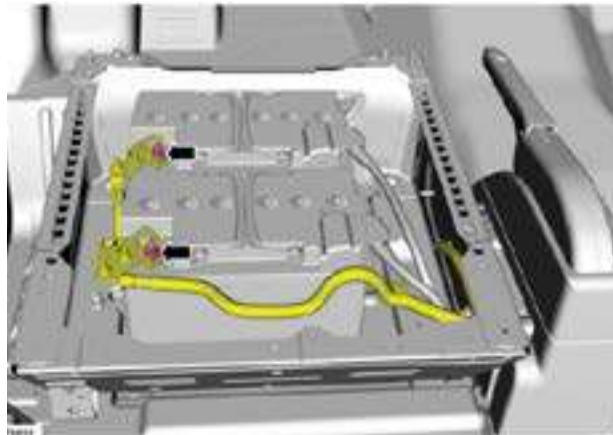

12. Remove the battery post covers. Loosen the nuts and position the positive battery cables.

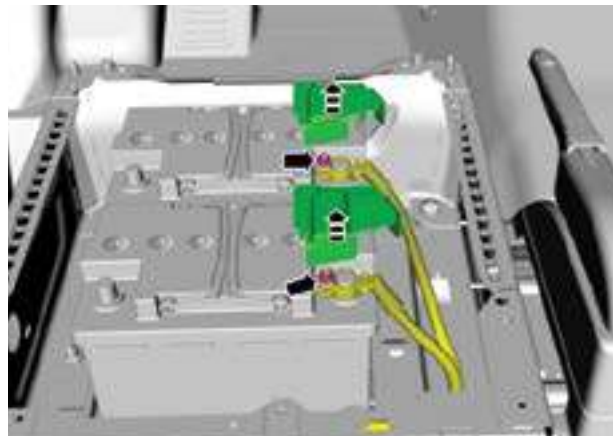



# FORD E-Transit

2022 - 2025

## 4. Access to the occupants



### WARNINGS:

**DEPOWERING THE HIGH VOLTAGE SYSTEM DOES NOT DISSIPATE VOLTAGE INSIDE THE HIGH VOLTAGE BATTERY PACK, WHICH REMAINS LIVE AND DANGEROUS. IT IS CRITICAL TO UNDERSTAND THAT HIGH VOLTAGE CAN ALSO REMAIN PRESENT IN OTHER HIGH VOLTAGE COMPONENTS THROUGHOUT THE VEHICLE. DIRECT CONTACT WITH THE HIGH VOLTAGE BATTERY PACK INTERNALS OR INTERNALS OF ANY OTHER HIGH VOLTAGE COMPONENT MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.**

**ELECTRIC VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THIS DOCUMENT. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH. ALWAYS ASSUME THE VEHICLE'S HIGH VOLTAGE SYSTEM IS POWERED UP! Cutting, crushing, or touching High Voltage components can result in serious injury or death.**

**Never disassemble or tamper with seat belt deployable components, including pretensioners, load limiters and inflators. Tampering may cause an accidental deployment and result in personal injury or death.**

**Do not handle, move or change the original horizontal mounting position of the restraints control module (RCM) while the RCM is connected and the ignition switch is ON. Also, do not at any time, physically damage or impinge the RCM with a cutting or crushing operation while the 12-volt battery is connected. Failure to follow these instructions may result in the accidental deployment of the Safety Canopy or other undeployed inflatable restraints and cause serious personal injury or death.**

**Service and handling of Pyrotechnic Components is restricted to qualified personnel. The required qualifications vary by region. Always observe local laws and legislative directives regarding Pyrotechnic Components service and handling. Failure to follow this instruction may result in serious personal injury or death.**

If occupant removal is necessary, always use caution when cutting near the vehicle High Voltage system components. Do not cut any of the High Voltage under vehicle or under hood cabling (all High Voltage cabling is orange). High voltage cabling runs underneath the vehicle, from the High Voltage battery under the left hand side of the vehicle to the underhood compartments. Refer to the diagram on page 25 for no cut zones.

**NOTE:** After a collision vehicle components may not function properly such as the steering wheel, power seats, and other electrical and mechanical components. If these components are not functioning properly and prevent access to occupants extraction may be required.





# FORD E-Transit


2022 - 2025

## Vehicle Body

The vehicle body is comprised of various strengths of aluminum.

## High Strength Zones

The door beams as shown below are made of high strength steel.

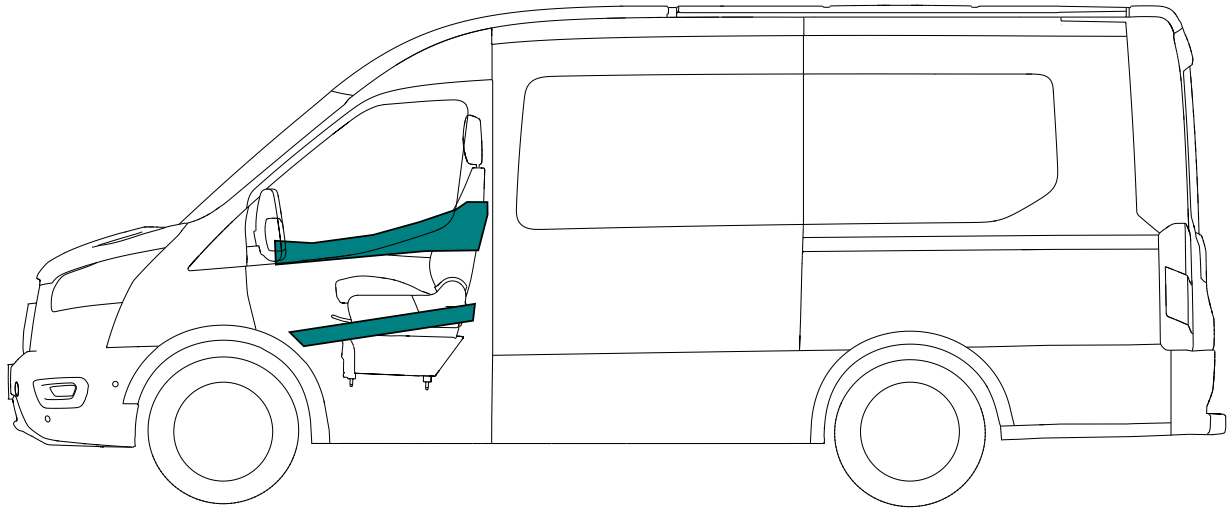




# FORD E-Transit

2022 - 2025

## High Strength Zones (continued)

The B and C pillars, as well as the roof bow are made of stronger aluminum.  
The floor tunnel is made of high-grade aluminum.

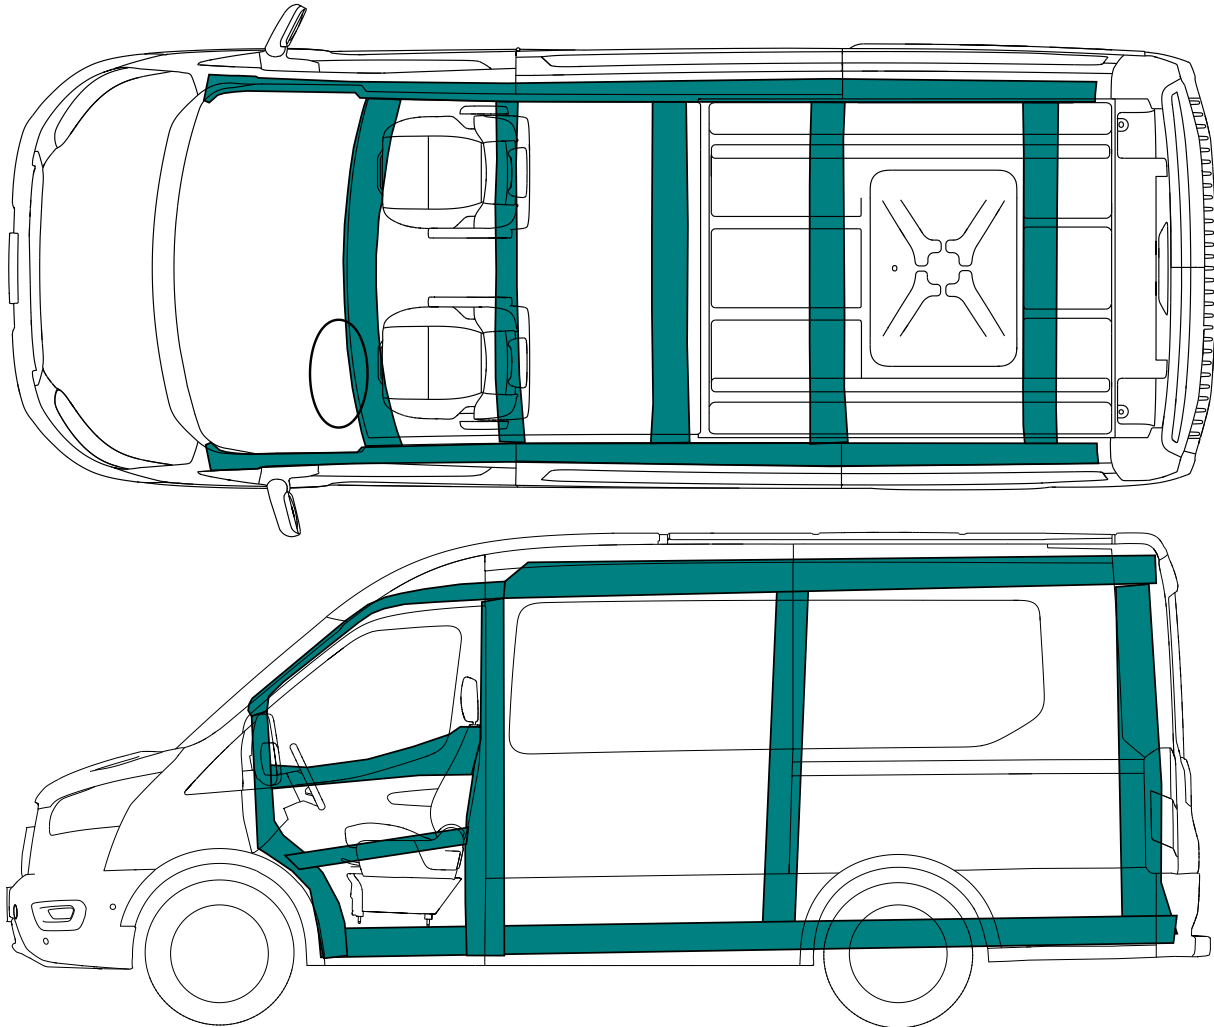



# FORD E-Transit

2022 - 2025

## NO Cut Zones

### WARNING:




ELECTRIC VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THIS DOCUMENT. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH. ALWAYS ASSUME THE VEHICLE'S HIGH VOLTAGE SYSTEM IS POWERED UP! Cutting, crushing, or touching High Voltage components can result in serious injury or death.

### WARNING:



Always use appropriate tools, such as a hydraulic cutter, and always wear appropriate personal protective equipment (PPE) when cutting. Failure to follow these instructions can result in serious injury or death.

Due to the presence of High Voltage, pyrotechnic components and safety restraint components the identified areas should not be cut. Doing so could result in serious injury or death.

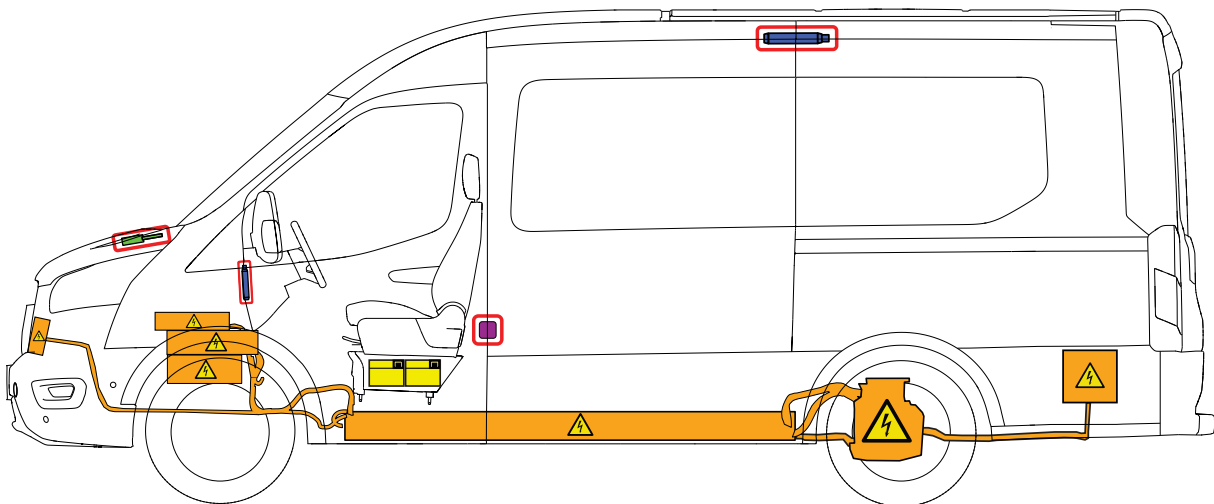




# FORD E-Transit

2022 - 2025

## Windows - Identification

The windshield, front driver side window and front passenger side window are made of laminated safety glass.

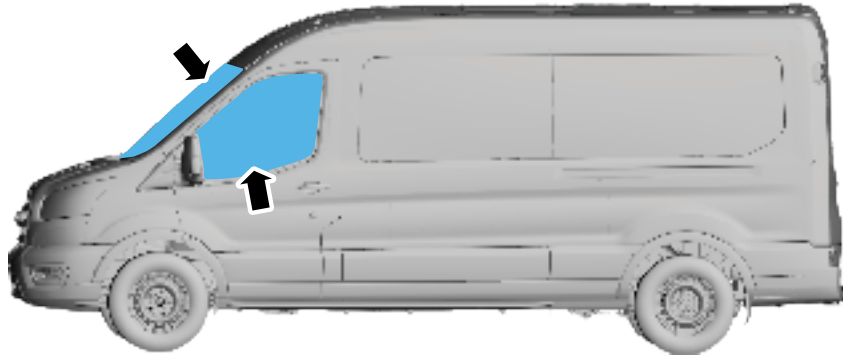

## Doors and Door Handles

To operate the front doors from inside the vehicle:


Pull the interior door handle.

To operate the sliding doors from inside the vehicle:

Pull the interior door handle to open the sliding door.

To operate the rear doors from inside the vehicle:

Pull the upper release lever toward you or slide the lower release lever downward to open the door. Pull the release lever to open the other door.

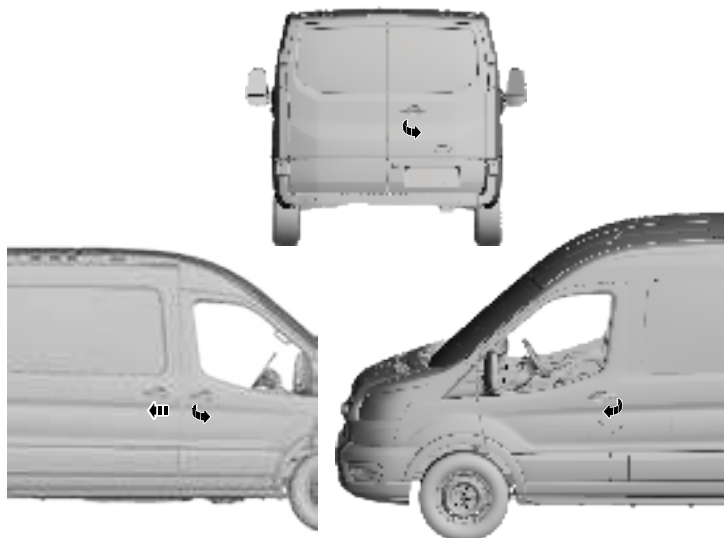



# FORD E-Transit

2022 - 2025

## Driver's Seat Adjustments

See the image below for adjusting the seat backward and forward as well as the seat height.







# FORD E-Transit

2022 - 2025

## Steering Wheel Adjustments

Adjusting the steering wheel with a manual adjustable steering column:

1. Unlock the steering column.
2. Adjust the steering wheel as needed.
3. Lock the steering column.





# FORD E-Transit

2022 - 2025

## Occupant Restraint Systems




### Airbags

The airbags are approximately located in the areas shown. Airbag information can be found on the sun visors as well.

When the RCM has deployed the safety restraint system component(s), the high-voltage system may be deactivated.

It should always be assumed that high voltage may still be present and no orange cables should be cut or breached. The high-voltage battery will also contain stored energy.

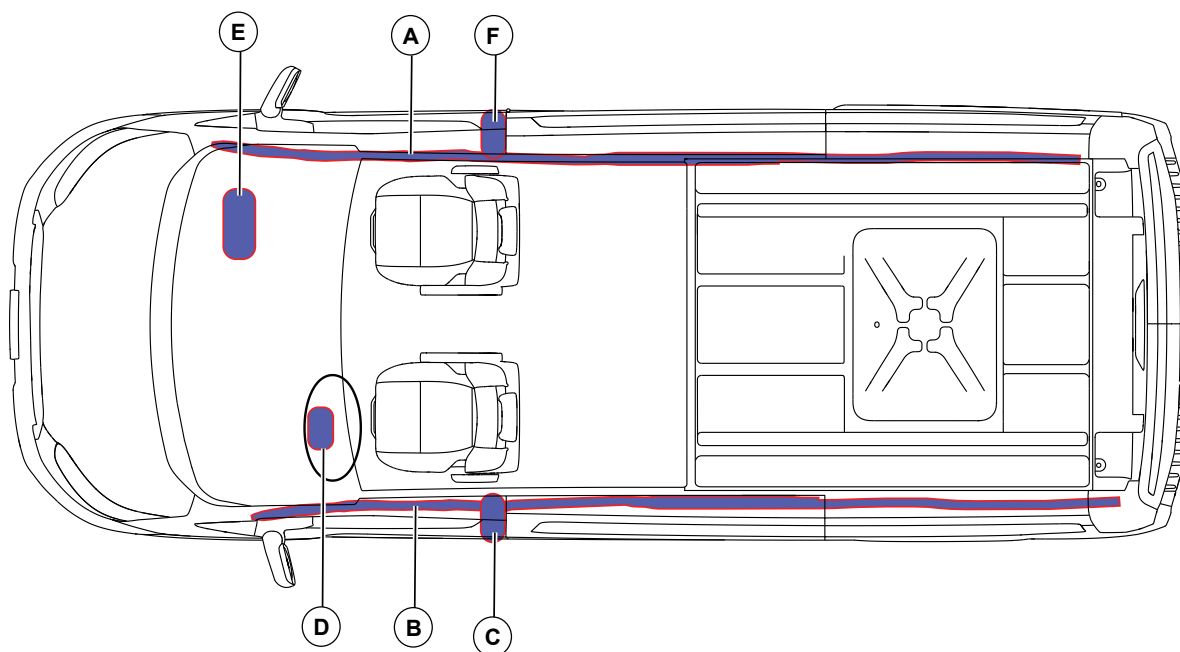

- A - Passenger side curtain airbag
- B - Driver side curtain airbag
- C - Driver side airbag
- D - Driver airbag
- E - Passenger airbag (if equipped)
- F - Passenger side airbag






# FORD E-Transit

2022 - 2025




## Stored Gas Inflators

The stored gas inflators are located in the B-pillar on the driver and passenger side as well as with the driver and passenger airbags.

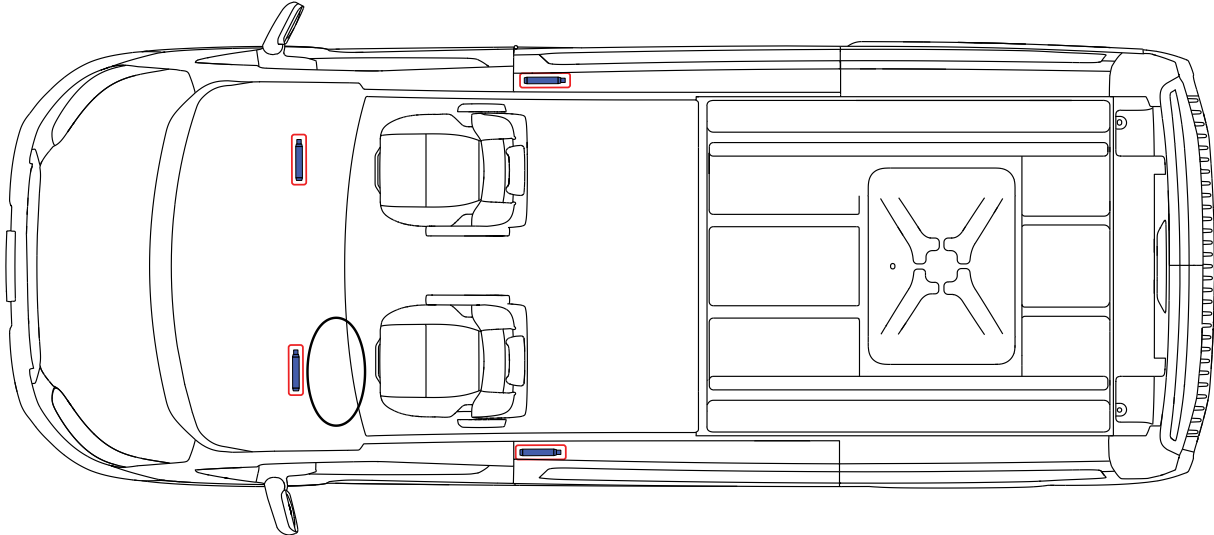

## Seatbelt Pretensioners

The seatbelt pretensioners are part of the restraint system.

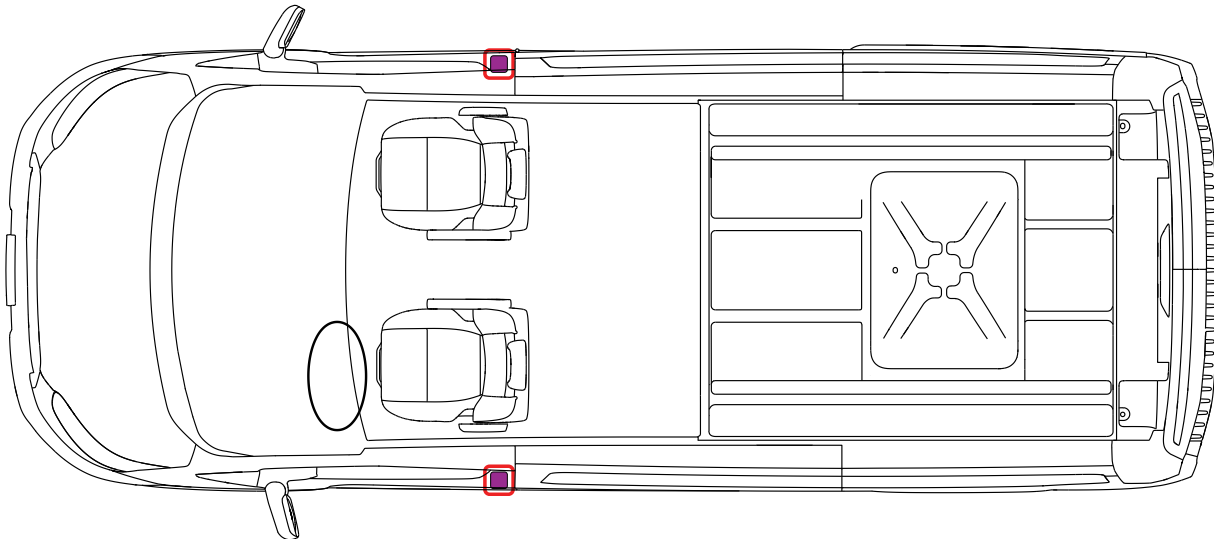




# FORD E-Transit

2022 - 2025

## 5. Stored energy / liquids / gases / solids

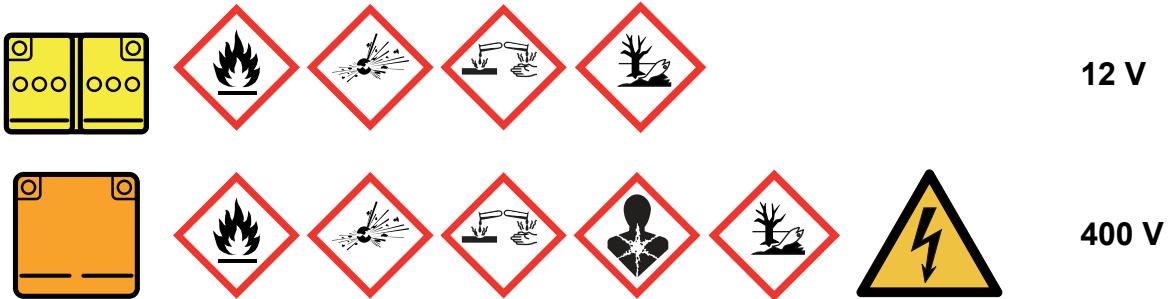

Refer to the vehicle overview illustration on Page 3, for location reference of the high voltage battery, 12-volt battery, and other vehicle component locations.





# FORD E-Transit

2022 - 2025

## 6. In case of fire



LITHIUM-ION BATTERIES CAN IGNITE SPONTANEOUSLY OR RE-IGNITE AFTER THE FIRE HAS BEEN EXTINGUISHED. WEAR APPROPRIATE PPE.



Follow Existing Training and Incident Commander Direction



### WARNINGS:

ELECTRIC VEHICLES WITH DAMAGED HIGH VOLTAGE BATTERIES REQUIRE SPECIAL HANDLING PRECAUTIONS. INSPECT THE VEHICLE CAREFULLY FOR LEAKING BATTERY FLUIDS, SPARKS, FLAMES, AND GURGLING OR BUBBLING SOUNDS. CONTACT EMERGENCY SERVICES IMMEDIATELY IF ANY OF THESE PROBLEMS ARE OBSERVED. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN A VEHICLE FIRE AND PERSONAL INJURY OR DEATH.

FIRES IN CRASH-DAMAGED ELECTRIC VEHICLES MAY EMIT TOXIC OR COMBUSTIBLE GASSES. SMALL AMOUNTS OF EYE, SKIN OR LUNG IRRITANTS MAY BE PRESENT. WEAR PERSONAL PROTECTIVE EQUIPMENT (PPE) AND SELF-CONTAINED BREATHING APPARATUS WHEN WORKING IN CLOSE PROXIMITY OR IN A CONFINED AREA, SUCH AS A TUNNEL OR GARAGE. VENTILATE THE VEHICLE INTERIOR BY OPENING VEHICLE WINDOWS OR DOORS. VENTILATE THE WORKING AREA. FAILURE TO FOLLOW THIS INSTRUCTION MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

DO NOT ATTEMPT TO DISCHARGE THE HV BATTERY.

White/light gray smoke from a HV battery contains chemicals which can be:

- Combustible where the smoke is exiting the battery vent location
- Explosive in a confined space environment (such as a small garage) with the correct mixture of air
- Toxic in short exposure durations

Forcing water into a HV battery which is NOT directly involved in a fire, or experiencing thermal runaway, may cause electrical shorting, electrical arcing, and initiate thermal runaway and fire within the battery.

HV battery thermal runaway events are VERY hot internally ( $>200^{\circ}\text{C}/392^{\circ}\text{F}$ ) and may remain hot for hours or DAYS if left uninterrupted, possibly leading to:

- Continued thermal propagation and intensity increase.
- Active fire outside of the HV battery.

HV battery fire and thermal runaway often occur together. Both fire and temperature of the HV battery must be brought under control. If only the fire is extinguished but high temperatures persist, then thermal runaway may continue, and fire may resume.





# FORD E-Transit

2022 - 2025

**The below sub-sections outline precautions and actions required in the event of a HV battery fire or thermal event.**

## **1. Assess the Situation - Is the HV battery in a fire or experiencing thermal runaway?**

When arriving on the scene of an electrified vehicle incident, first determine whether any observed fire or thermal runaway involves the HV battery via the following guidance:

### *Assessment of Flames -*

If flames are coming from the bottom of the vehicle and/or the sides of the vehicle below the doors:

Then the HV battery IS likely involved.

If flames are not coming from the HV battery location, but are coming from the wheel wells:

Then the HV battery MAY BE involved. Seek additional information (assessment of smoke, sounds and temperatures).

If flames are not coming from the HV Battery location or wheel wells, but are coming from other such areas as the frunk or occupant compartment interior:

The HV battery is NOT likely involved.

### *Assessment of Smoke -*

If there is jetting smoke lasting more than a few seconds and it is coming from the battery vicinity:

Then the HV Battery IS likely experiencing thermal runaway.

If substantial white/light gray smoke is seen:

Then the HV Battery IS likely experiencing thermal runaway.

If substantial dark gray/black smoke is seen:

Then the HV Battery MAY BE experiencing thermal runaway. Seek additional information (Assessment of sounds and temperature).

### *Assessment of Sounds -*

If you hear several repetitive explosive, popping, percussive type sounds (possibly intermittent) then the HV Battery is likely experiencing thermal runaway.

**NOTE:** Other components with compressed gas or pyrotechnics such as gas struts and airbags may produce singular explosive sounds but will not cause several repetitive sounds.





# FORD E-Transit

2022 - 2025

## Assessment of Temperatures -

If the HV Battery surface temperatures (or materials immediately covering the HV Battery) exceed 149°C (300°F) and there is not an external heat source near the HV Battery causing this then the HV Battery IS likely experiencing thermal runaway.



**WARNING:** A HV Battery with surface temperatures above 71°C (160°F) may remain at risk of resuming thermal runaway and a fire event.

## NOTES:

- Thermal imaging cameras with target temperature measurement capability are well suited for surface temperature measurements from a distance with acceptable accuracy.
- Measurements of multiple surface locations are recommended to determine a HV battery is not at thermal risk to resume thermal runaway or fire.
- Use of a pole mounted thermal camera or tilting the vehicle may enable better measurements of the HV battery.
- There is a skid plate under the HV battery, and temperatures of the skid plate are not accurate assessments of battery case temperatures.

## Assessment of the HV battery -

If the HV Battery IS likely involved in a fire or experiencing thermal runaway proceed to sub-section 2.

If the HV Battery MAY BE involved in a fire or experiencing thermal runaway then address the incident according to standard procedures, while continuing to monitor for indications of a HV Battery fire or thermal runaway.

If the HV Battery IS NOT likely involved in a fire or experiencing thermal runaway, then address the incident according to standard procedures.

## 2. Contain any active HV battery Fire and Thermal Runaway - ONLY if the HV battery is likely involved



### WARNINGS:

**Do not cut through the vehicle floor during this containment phase to gain access to a HV battery beneath. Emergency cutting above the HV battery risks additional damage to the HV battery and may increase the reaction severity.**

**Only when no ignition sources are present, ventilate any HV battery smoke from the occupant compartment or in a confined space that the vehicle is in, such as a garage. The battery vent smoke can be combustible and explosive in the correct concentrations. This may be best accomplished by simply opening doors or breaking window glass. Do not introduce an ignition source by cutting with a spark producing tool.**

**Resumption of thermal runaway and fire after containment actions remains possible. The likelihood of thermal runaway and fire is greater if water has entered the HV battery during the Containment of Fire and Thermal Runaway activities. Firefighting personnel should remain on scene and be prepared to resume containment activities until the actions in sub-section 2 have been completed and the Office in Charge (OIC) has deemed the vehicle safe for transport.**





# FORD E-Transit

2022 - 2025

## NOTES:

- HV batteries may be difficult to apply water to and cool and require several times more water than a conventional vehicle fire. Consider additional resources to establish a continuous, sustainable water supply.
- Thermal imaging cameras with target temperature measurement capability are well suited for surface temperature measurements from a distance with acceptable accuracy.
- Always use appropriate Firefighting Personal Protection Equipment (PPE) and/or Self-Contained Breathing Apparatus (SCBA) for protection from flames and toxic chemicals.

**Once the HV Battery has been assessed as involved in fire or thermal runaway, the OIC should determine one of two strategies to address the situation.**

### **1. Engage the HV Battery to extinguish any flames and cool all accessible surfaces**

- a. Apply water onto the HV Battery
  - i. Direct application of water is best
  - ii. Tilting the vehicle may improve HV Battery access to apply water. Follow the precautions in Section 2 for Stabilization and Lifting Points.
- b. Continue to apply water for several minutes after any visible flames have been extinguished and the HV Battery surface has cooled below 66°C (150°F).
- c. Monitor HV battery case temperature with a thermal imager and alternate with water cooling if the temperature rebounds to above 66°C (150°F) in 20-minute intervals.
  - i. To assist in getting water into the HV Battery the frunk should be opened and the liner should be removed. The transmission tunnel is directly behind the 12-volt battery location. Water applied in this area can get down to the HV battery.
- d. Ventilate the vehicle interior: Open/remove doors, open/remove windows.

### **2. Allow the battery to burn itself out**

- a. Alternatively, the incident may be quarantined and left to consume the battery rather than attempting to actively fight the fire.
  - i. This determination should be made by the OIC considering possible life, property, infrastructure and environmental exposures from heat OR byproducts of combustion.
  - ii. Water supply and application may still be necessary to protect exposures such as property or infrastructure.
  - iii. This method can reduce the possibility of a repeat incident with the same vehicle.







# FORD E-Transit

2022 - 2025

## 7. In case of submersion



### WARNING:


**DAMAGED ELECTRIC VEHICLES SUBMERGED IN WATER PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) INCLUDING HIGH VOLTAGE SAFETY GLOVES AND BOOTS. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. DO NOT ATTEMPT TO EXTRACT THE VEHICLE UNTIL THE HIGH VOLTAGE BATTERY HAS DISCHARGED INDICATED BY THE ABSENCE OF BUBBLING OR FIZZING. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.**

If the vehicle is submerged in water, varying degrees of arcing/shorting within the battery will take place. Do not touch any High Voltage components or orange cables while removing the occupant(s). Do not remove the vehicle until you are sure the High Voltage battery is completely discharged. A submerged High Voltage battery may produce a fizzing or bubbling reaction to the water. If fizzing or bubbling is observed, the High Voltage battery will be discharged when the fizzing or bubbling has completely stopped. The battery should still be treated as if it is not discharged.

Battery Electric and Hybrid vehicles when submerged should only be handled while wearing the appropriate Personal Protective Equipment (PPE) for water rescue and vehicle extraction.

Vehicles that have been submerged in water may have potential risk of a high voltage electrical battery fire therefore should be handled with increased caution.

Once the vehicle has been removed from the water proceed to the high voltage disable procedure, as outlined in section 3 of this document.

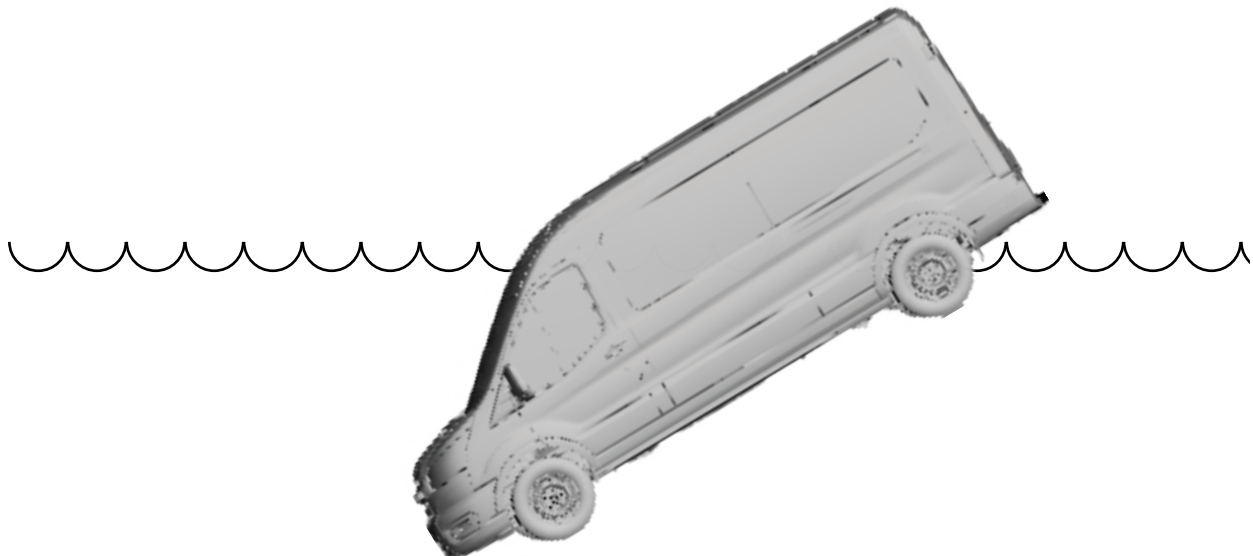



# FORD E-Transit

2022 - 2025




## 8. Towing / transportation / storage



LITHIUM-ION BATTERIES CAN IGNITE SPONTANEOUSLY OR RE-IGNITE AFTER THE FIRE HAS BEEN EXTINGUISHED. WEAR APPROPRIATE PPE.



If the vehicle has been involved in an accident or if the HV battery is damaged or unstable: Deactivate the high-voltage system (See Section 3). Do not store a severely damaged vehicle inside a structure or within 50 ft (15m) of any structure or vehicle.



### Moving Damaged Vehicles - Tow Truck Drivers

**IMPORTANT! Be alert. There is a potential for delayed fire with damaged lithium-ion batteries.**

**NOTICE: Do not attempt to pull / tow vehicle with wheels on the ground as this may cause the vehicle to generate electricity and can cause potential damage.**

Confirm that the HV System is disabled. Refer to Section 3 Disable Direct Hazards/Safety Regulations.

Follow the guidelines in the Wrecker Towing Guide



**WARNING: DO NOT contact or apply loads to HV components. HV components on the vehicle are identified on Page 3.**

**In the event of damage to or fire involving an electric vehicle:**

- Always assume the High Voltage battery and associated components are energized and fully charged.
- Exposed electrical components, wires, and High Voltage batteries present potential HV shock hazards.
- Venting/off-gassing High Voltage battery vapors are potentially toxic and flammable.
- Physical damage to the vehicle or High Voltage battery may result in immediate or delayed release of toxic and/or flammable gases and fire.





# FORD E-Transit

2022 - 2025

## Notes for Transport Personnel:

- If you detect leaking fluids, sparks, smoke, flames, increased temperature, gurgling, popping or hissing noises from the High Voltage Battery compartment, call 911.
- The HV components equipped on this vehicle include protective designs and packaging to substantially reduce the risk of an electrical shock hazard. This remains true even if water is present on or near the vehicle and ground.
- Place vehicle into park (P), set the parking brake, turn off the vehicle, activate hazard lights, and remove the keys to a distance of at least 5m (16 ft) from the vehicle until loading.
- Prior to transporting a vehicle with a HV battery that has been involved in a fire, ensure that the vehicle interior has been ventilated by opening or removing doors and/or windows.
- Assess the vehicle structure (sheet metal body, chassis, driveline) to ensure it is safe and structurally capable of receiving rigging. Only use safe, capable structures for securing the vehicle. Do not place load on HV components.
- Rigging must not contact or apply force to HV components. Avoid winching or placing straps over or near HV components. Use non-conductive materials as needed.
- Refer to the vehicle owner manual or recovery guide to locate proper attachment and connection points and recommended transport methods.

### 1. Vehicle preparation for transport:

#### ***Drain residual water from the battery***

If the vehicle is tilted at the conclusion of the fire containment activities, allow the vehicle to rest approximately level on the ground until the following two conditions are met:

5 minutes time on level ground have passed

Water is dripping from the battery bottom at no more than 1 drop per second

Once the water has drained on level ground, the towing personnel should prepare to winch the vehicle onto the truck/trolley.


Begin winching the vehicle onto the truck/trolley, but stop when the vehicle is near the steepest slope it will achieve. See the Figure below.

Allow the vehicle to drain until the following two conditions are met:

5 minutes time while inclined have passed

Water is dripping from the battery bottom at no more than 1 drop per second

Complete the winching activity and secure the vehicle to the tow truck.

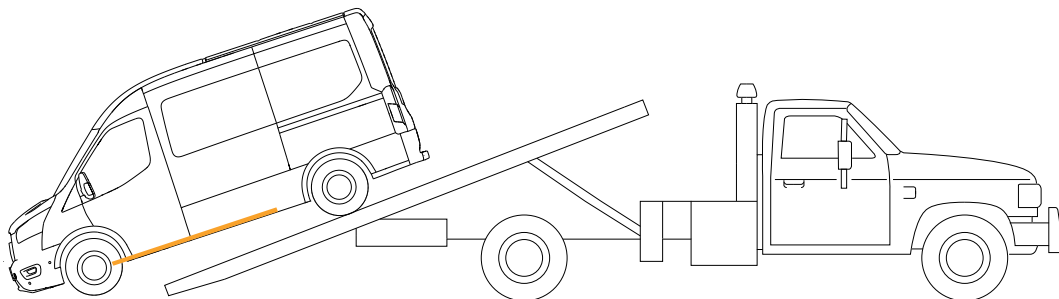



# FORD E-Transit

2022 - 2025

## 2. Vehicle transport:

**Select a drive route for towing the vehicle from the incident scene to the location that meets the following criteria in the order presented:**

- Avoid high traffic density
- Avoid the use of highway tunnels
- Reduce the degree of steep roads during transportation
- Reduce the transportation distance

**Drive with gentle accelerations, decelerations and turns.**

## Vehicle Storage

Contact an authorized Ford or Lincoln Dealer as soon as possible as there may be additional steps necessary to secure, handle, and/or store the High Voltage battery and vehicle.

Do not store a severely damaged vehicle with a lithium-ion battery inside a structure, any enclosed container or within 15 m (50 ft) of any structure or vehicle.

Make sure the passenger and cargo compartments remain ventilated.

Prior to placing vehicle in storage, and while located in storage area/tow lot, continue to inspect vehicle for leaking fluids, sparks, smoke, flames, gurgling or bubbling sounds from the High Voltage battery and call 911 if any of these are detected.

Maintain clear access to stored vehicles for monitoring and emergency response if needed.

Do not place load on HV components. DO NOT ATTEMPT TO DISCHARGE THE HV BATTERY.

Securing straps must not contact or apply force to HV components. Avoid winching or placing straps over or near HV components. Use non-conductive materials as needed.






# FORD E-Transit

2022 - 2025

If the vehicle and/or battery High Voltage system is damaged, place a sign indicating that it is a battery electric vehicle with potentially dangerous High Voltage. See example below:

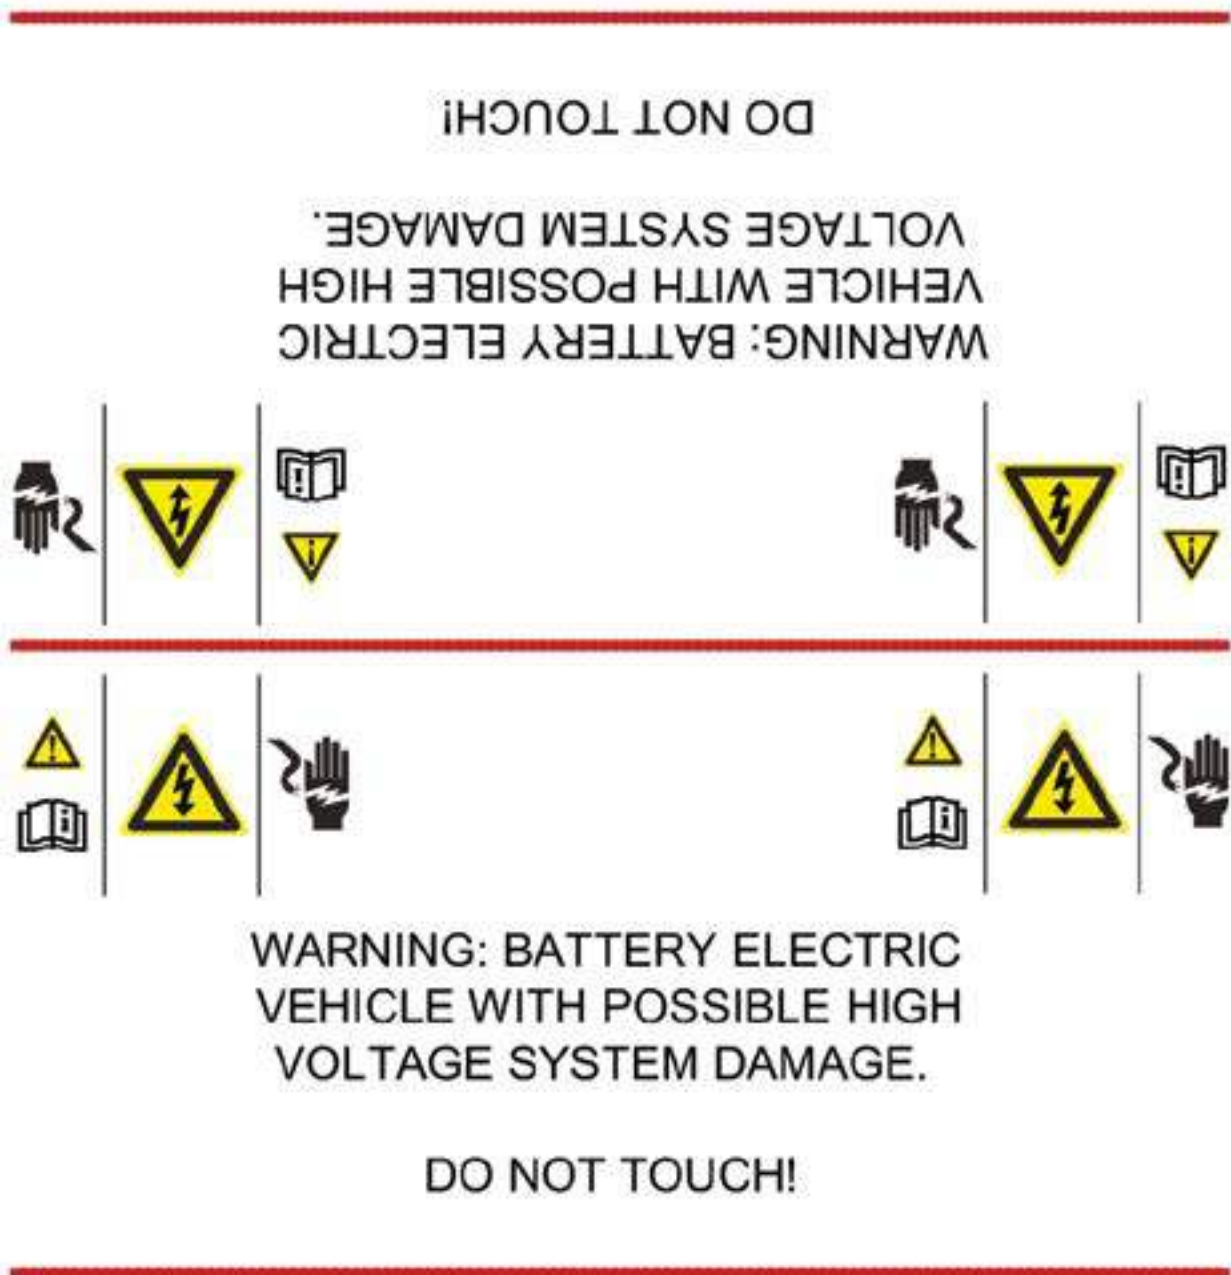



# FORD E-Transit

2022 - 2025

## 9. Important additional information

### HV Battery transport:

DDR (Damaged, Defective, Recalled) HV batteries must satisfy special shipping regulations per Department of Transportation (DOT) and Transportation of Dangerous Goods (TDG) in the US and Canada markets.

DDR HV batteries must be transported in metal containers which have been certified for that purpose.

### HV Battery storage:

HV batteries should be shipped to recyclers for disposal as soon as possible and stored for not more than 6 months. Consult with relevant authorities and fire safety experts to ensure compliance with regulations and the effectiveness of any fire suppression systems in place when HV batteries will be stored for a significant amount of time.

For First Responder Resources, refer to <https://www.ford.com/firstresponder/>

© Copyright 2025, Ford Motor Company. All rights reserved. This document may be reproduced in its entirety and distributed for emergency responder use only. It may not be excerpted for any purpose.

## 10. Explanation of pictograms used



Flammable



Explosive



Corrosives



Hazardous  
to the  
human health



Environmental  
hazard



Electric  
vehicle



Left-Hand  
Drive



Use water  
to extinguish  
the fire



General  
warning



Warning,  
Electricity



Open  
Hood/Frunk



Use infrared thermometer /  
Thermal Infrared camera

