




Emergency Response Quick Reference Guide

ELECTRIFIED GV70 / 2023+

Vehicle Identification/Recognition



Accessing Vehicle

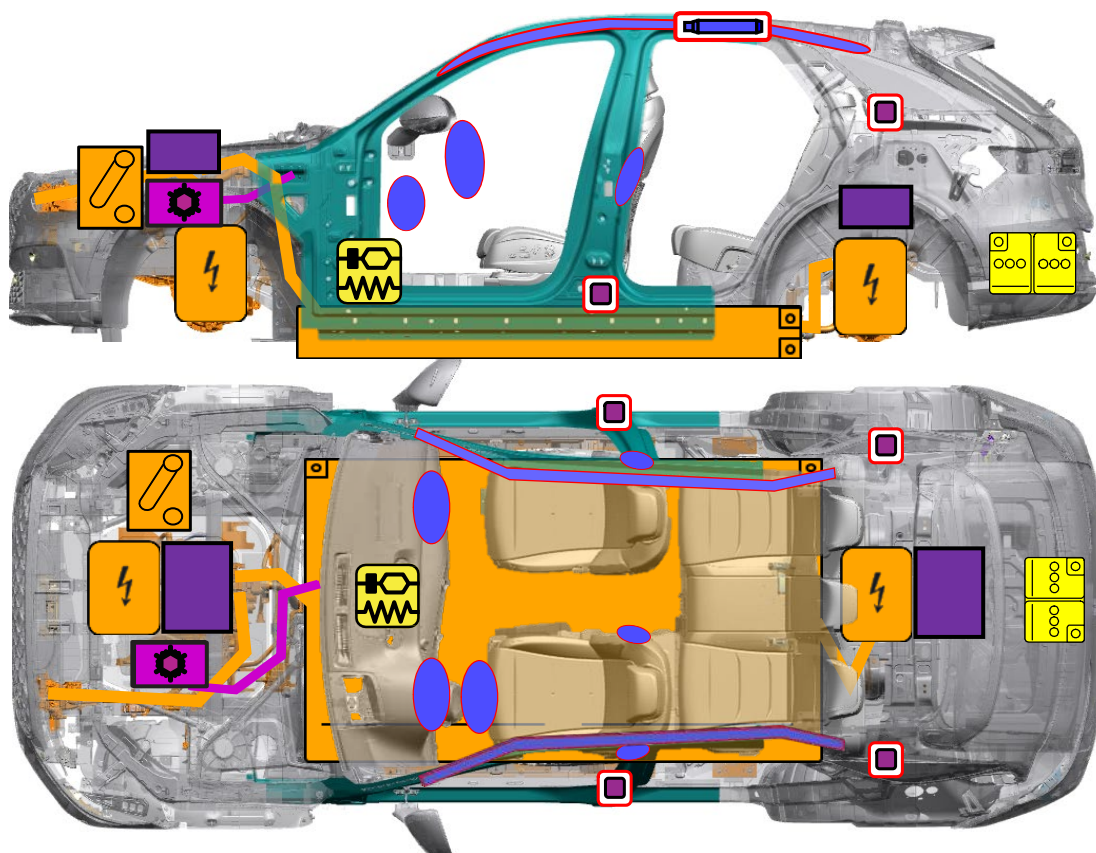

 Supplemental Restraint System Control Module (SRSCM)	 Airbag	 Airbag Gas Inflators
 High voltage cable	 12V Battery	 Air-conditioning line
 High voltage disconnect	 OBC (On – Board Charger)	 Ultra-High Strength Steel
 High Voltage Battery	 Air-conditioning component	 Seat belt pretensioner
 Motor Drive Unit		

Applicable to Electrified GV70 vehicles first sold in the United States.

ID. No.
KMH-JK1 EV

Version No.
2023.02.21

Page
1 of 2



Emergency Response Quick Reference Guide

ELECTRIFIED GV70 / 2023+

Disabling Vehicle

1

REAR CARGO AREA

2

5m (16.4ft) or more
To Prevent Accidental Restart

3

1

DISCONNECT 12V

WAIT 5min.

OR

1

REAR CARGO AREA

2

5m (16.4ft) or more
To Prevent Accidental Restart

3

Disconnect High Voltage System by removing fuse with yellow tab, then wait 5 minutes

Vehicle Towing Information

Tow the vehicle using a flat bed or using wheel dollies. Never tow the vehicle with the front or rear wheels on the ground



For further information, please refer to the Emergency Response Guide (ERG).

Applicable to Electrified GV70 vehicles first sold in the United States.	ID. No. KMH-JK1 EV	Version No. 2023.02.21	Page 2 of 2
--	-----------------------	---------------------------	----------------