



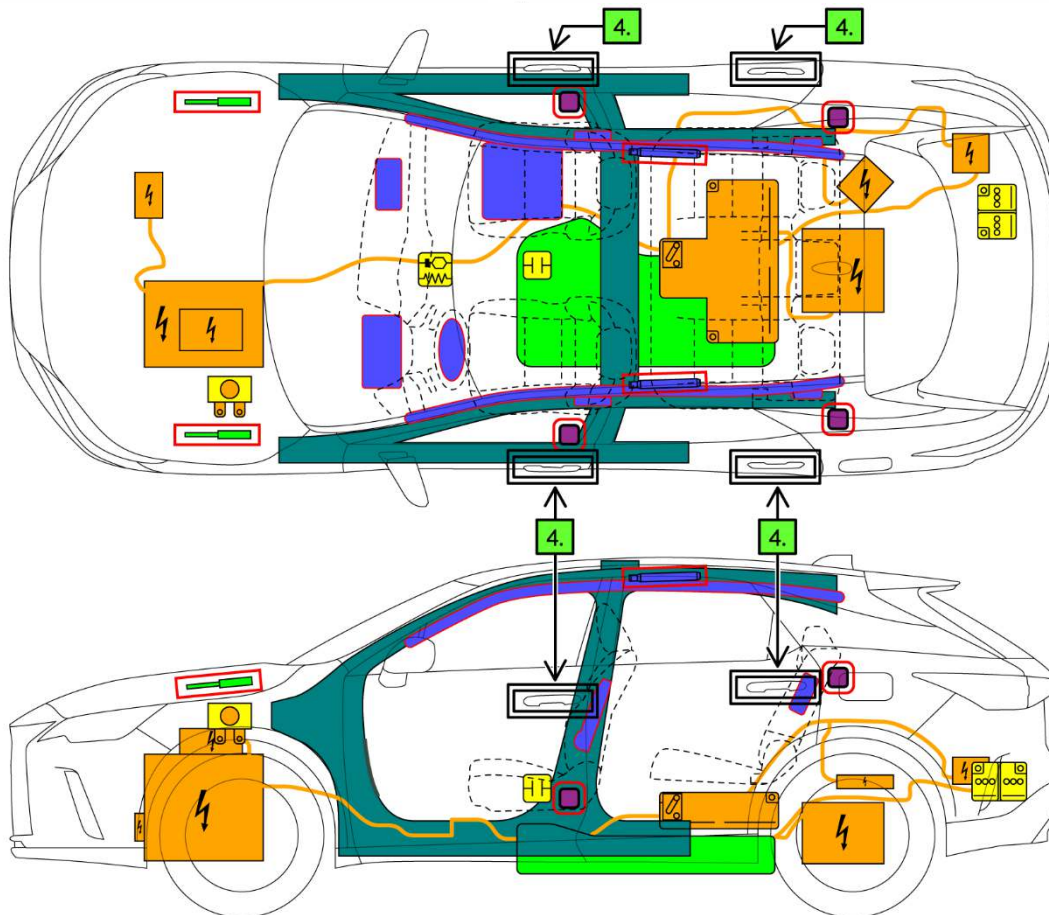

# LEXUS RX350h/RX500h

MY: 2025 – present

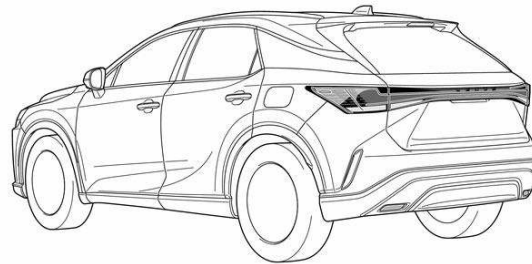


|        |                                                  |             |                                      |              |                                                   |       |                                  |  |                                     |
|--------|--------------------------------------------------|-------------|--------------------------------------|--------------|---------------------------------------------------|-------|----------------------------------|--|-------------------------------------|
|        | Airbag                                           |             | Stored gas inflator                  |              | Seat belt pretensioner                            |       | SRS control unit                 |  | Pedestrian protection active system |
|        | Automatic rollover protection system             |             | Gas strut / Preloaded spring         |              | High strength zone                                |       | Zone requiring special attention |  |                                     |
|        | Battery low voltage                              |             | Ultra-capacitor, low-voltage         |              | Fuel tank                                         |       | Gas tank                         |  | Safety valve                        |
|        | Battery pack, high-voltage                       |             | High voltage power cable / component |              | High voltage device that disconnects high voltage |       | Fuse box disabling high voltage  |  | High voltage ultra-capacitor        |
|        | Low voltage device that disconnects high voltage |             | Device to shut down power in vehicle |              | Cable cut                                         |       |                                  |  |                                     |
| ID No. |                                                  | Version No. |                                      | Version date |                                                   | Page  |                                  |  |                                     |
| RXHV10 |                                                  | 02          |                                      | 10 / 2024    |                                                   | 1 / 4 |                                  |  |                                     |

## 1. Identification / Recognition



Lack of engine noise does not mean vehicle is off. Silent movement or instant restart capability exists until vehicle is fully shut down.

### ■ Location of vehicle badges

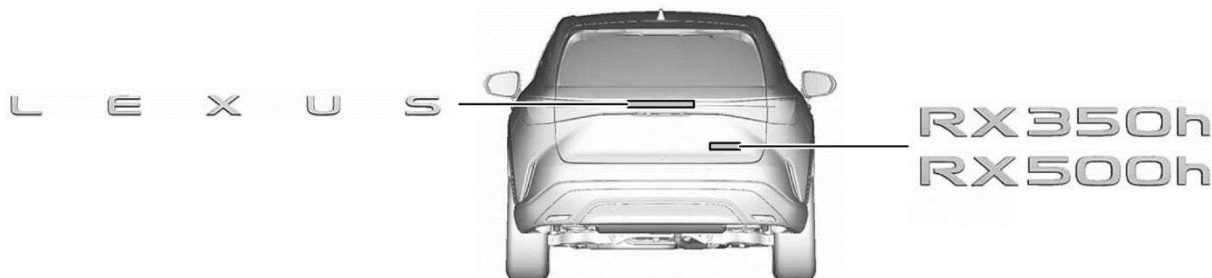


### ■ Energy source: Nickel metal hydride battery




## 2. Immobilisation / Stabilisation / Lifting

### ■ Completely immobilize the vehicle

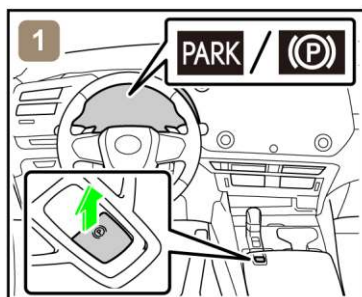


1) Chock the wheels and engage the parking brake.

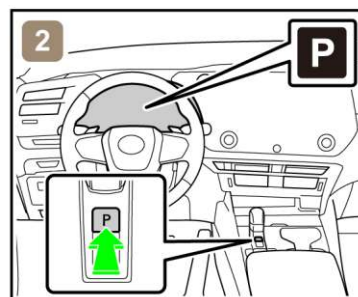

2) Press the P position switch.

### ■ Stabilisation-lifting point

Place cribbing such as wooden blocks at the four points under the front and rear pillars.

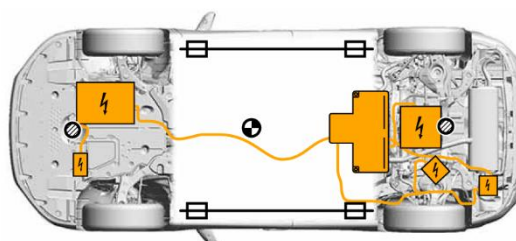

Extra Reinforced Lifting Points



Standard Jack Locations



Vehicle Center of Gravity



Do not place cribbing such as wooden blocks or rescue air lifting bags under the exhaust system, fuel system or high voltage power cables. Doing so may result in fuel leaks, fire, or electric shock.

| ID No. | Version No. | Version date | Page  |
|--------|-------------|--------------|-------|
| RXHV10 | 02          | 10 / 2024    | 2 / 4 |

3. Disable direct hazards / Safety regulations


■ If any of the following systems are required to be operated, operate them BEFORE disconnecting the battery.

- Power door lock
- Power window
- Power Back door
- Moon roof
- Panoramic moon roof
- Power seat
- Power tilt and telescopic steering
- Electric parking brake
- Electronic shift lever

When the 12 V battery is disconnected, electrical components cannot be operated.


■ Perform procedure Main or Alternative to completely shut off the vehicle.

<Main Procedure>

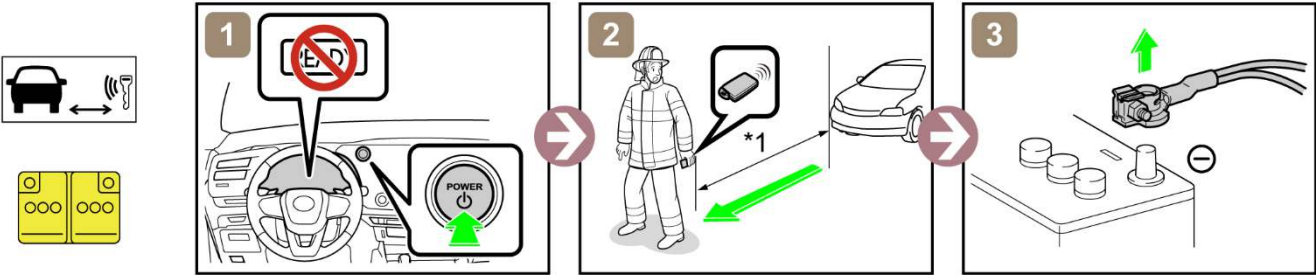


\*1: 5 m (16.4 ft) or more

<Alternative Procedure>

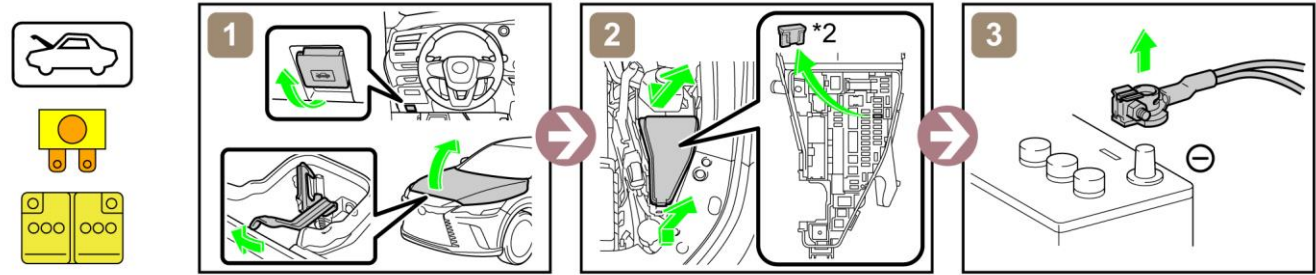


\*2: IGP-MAIN NO. 1 FUSE (30 A GREEN)

■ Access to 12 V Battery

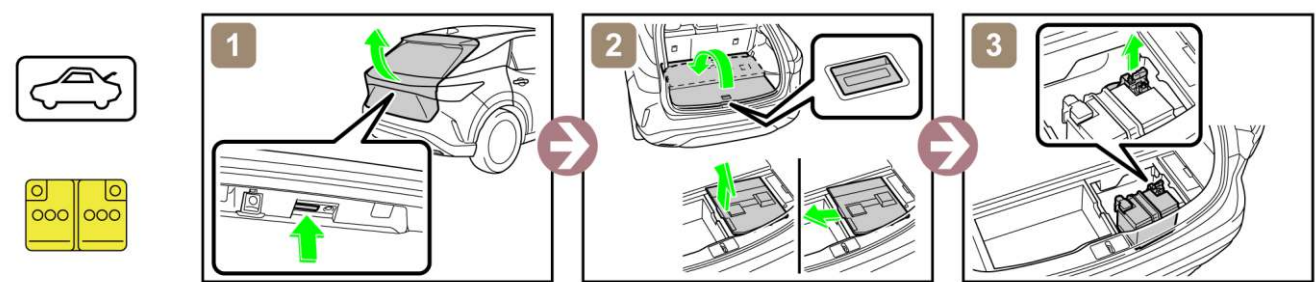

4. Access to the occupants

■ Window Glass

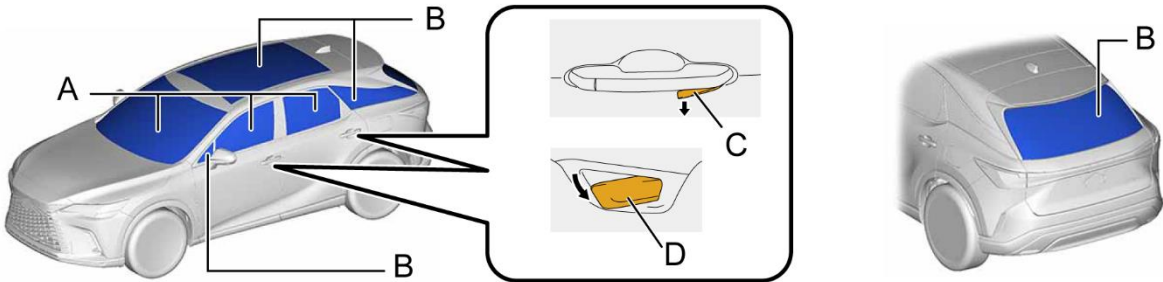

|   |                        |   |                                    |
|---|------------------------|---|------------------------------------|
| A | Laminated              | B | Tempered                           |
| C | Outside Release Handle | D | Inside Release Handle (pull twice) |

|  |        |             |              |       |
|--|--------|-------------|--------------|-------|
|  | ID No. | Version No. | Version date | Page  |
|  | RXHV10 | 02          | 10 / 2024    | 3 / 4 |

5. Stored energy / Liquids / Gases / Solids



High Voltage Ni-MH Battery



12 V Battery



Gasoline Tank: 65 L





- Always wear appropriate personal protective equipment (PPE) when dealing with any of these items.
- Never breach or remove the battery assembly cover under any circumstances, including fire. Doing so may result in serious injury or death from severe burns or electric shock.

6. In case of fire



USE COPIOUS AMOUNTS OF WATER

If it is difficult to apply copious amounts of water to the high voltage battery, it is recommended to allow the high voltage battery to burn itself out.



RE-IGNITION POSSIBLE !




7. In case of submersion



Do not touch any of the high-voltage components or cables, including the service plug, while the vehicle is submerged. Doing so may result in electric shock.

Work on the vehicle only after the vehicle has been pulled out of the water.

8. Towing / Transportation / Storage

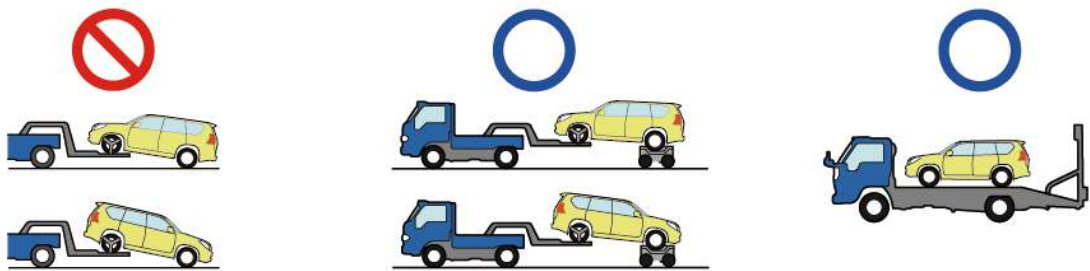



RE-IGNITION POSSIBLE !

Store the vehicle at a safe distance (15 m (49.2 ft) or more) from other vehicles.

9. Important additional information

For more details, please refer to "Emergency Response Guide."  
<https://www.techinfo.toyota.com>

|  |        |             |              |       |
|--|--------|-------------|--------------|-------|
|  | ID No. | Version No. | Version date | Page  |
|  | RXHV10 | 02          | 10 / 2024    | 4 / 4 |