




**LEXUS TX550h+**  
5 doors / 7 seats / wagon  
MY: 2026 -

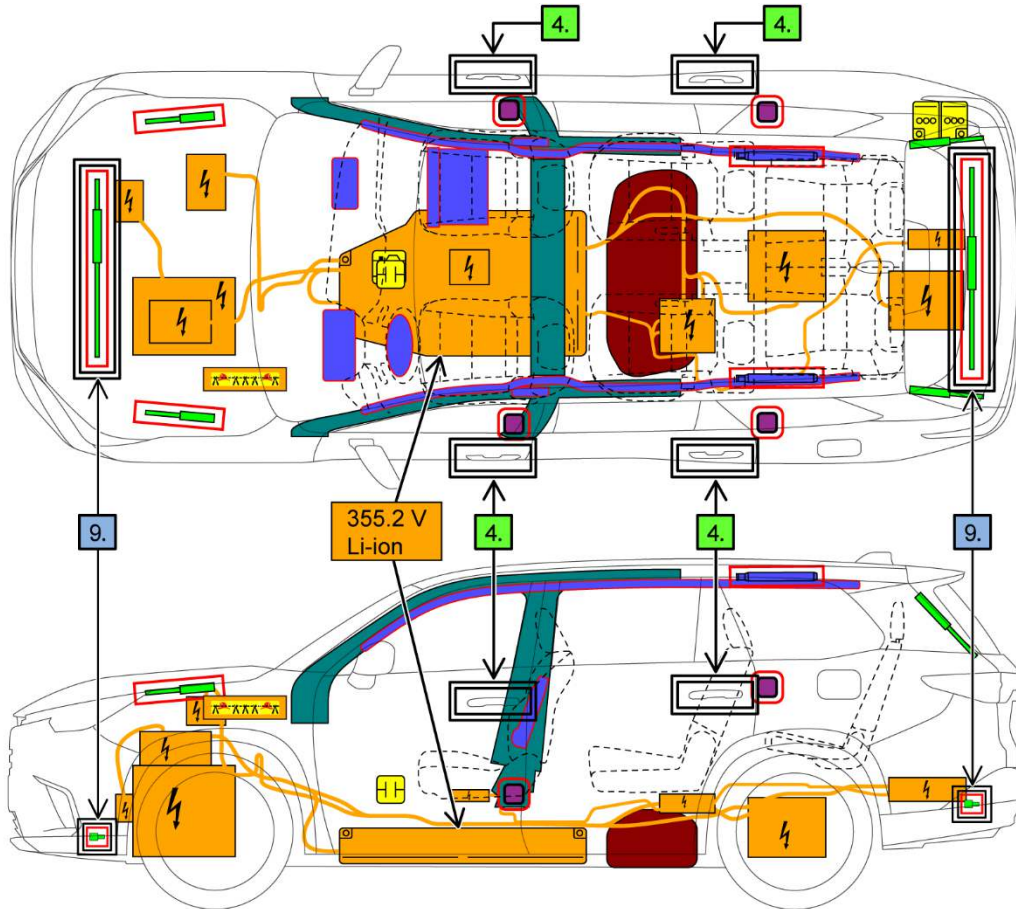

|         |                           |             |                                  |              |                          |       |                              |  |                              |
|---------|---------------------------|-------------|----------------------------------|--------------|--------------------------|-------|------------------------------|--|------------------------------|
|         | Airbag                    |             | Stored gas inflator              |              | Seat belt pretensioner   |       | SRS control unit             |  | Gas strut / Preloaded spring |
|         | High strength zone        |             | Zone requiring special attention |              | Battery low voltage      |       | Ultra capacitor, low voltage |  | Fuel tank                    |
|         | High voltage battery pack |             | High voltage component           |              | High voltage power cable |       | Cable cut                    |  |                              |
|         |                           |             |                                  |              |                          |       |                              |  |                              |
|         |                           |             |                                  |              |                          |       |                              |  |                              |
| ID No.  |                           | Version No. |                                  | Version date |                          | Page  |                              |  |                              |
| TXPHV15 |                           | 01          |                                  | 09 / 2025    |                          | 1 / 4 |                              |  |                              |

## 1. Identification / Recognition



LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN.

### ■ Location of vehicle badges




### ■ Energy source: Lithium-ion battery




## 2. Immobilisation / Stabilisation / Lifting

### ■ Completely immobilize the vehicle

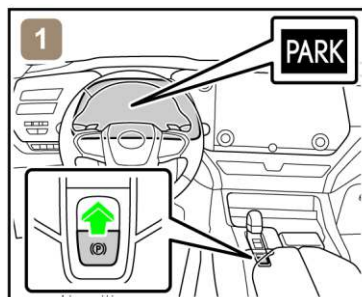


1) Chock the wheels and engage the parking brake.

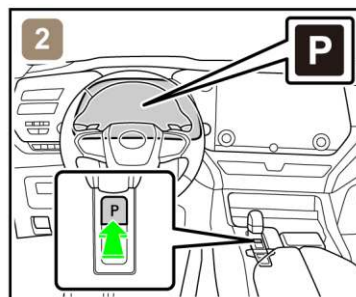

2) Press the P position switch.

### ■ Stabilisation-lifting point

Place cribbing such as wooden blocks at the four points under the front and rear pillars.

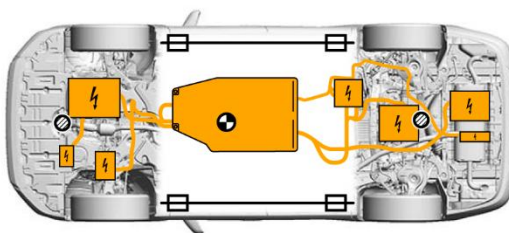

Extra Reinforced Lifting Points



Standard Jack Locations



Vehicle Center of Gravity



DO NOT PLACE CRIBBING SUCH AS WOODEN BLOCKS OR RESCUE AIR LIFTING BAGS UNDER THE EXHAUST SYSTEM, FUEL SYSTEM OR HIGH VOLTAGE POWER CABLES. DOING SO MAY RESULT IN FUEL LEAKS, FIRE, OR ELECTRIC SHOCK.

| ID No.  | Version No. | Version date | Page  |
|---------|-------------|--------------|-------|
| TXPHV15 | 01          | 09 / 2025    | 2 / 4 |

### 3. Disable direct hazards / Safety regulations

■ If any of the following systems are required to be operated, operate them **BEFORE** disconnecting the battery.

Power door lock  
Panoramic moon roof  
Electric parking brake


Power window  
Power seat  
Electronic shift lever

Power Back door  
Power tilt and telescopic steering

When the 12 V battery is disconnected, electrical components cannot be operated.


■ Perform procedure Main or Alternative to completely shut off the vehicle.

<Main Procedure>

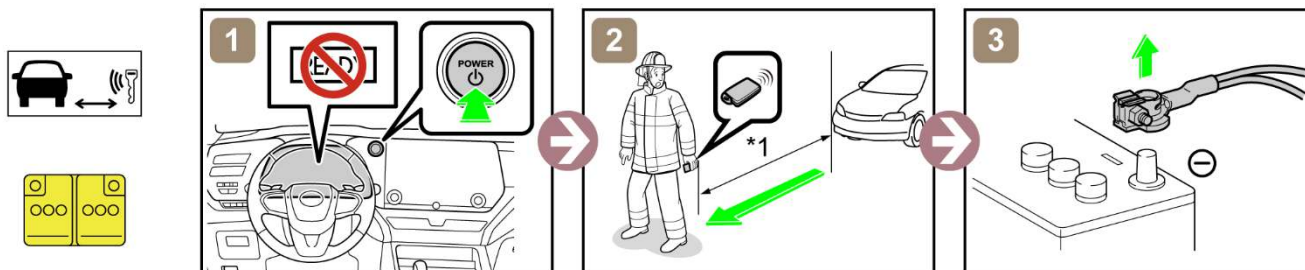


\*1: 5 m (16.4 ft) or more

<Alternative Procedure>

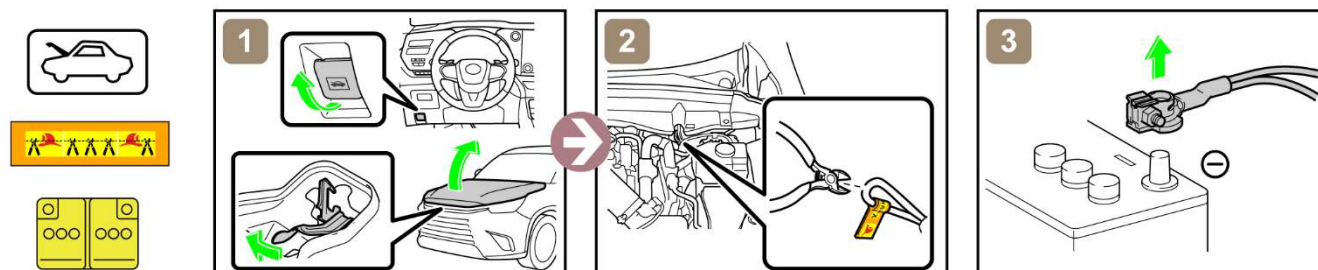


In the event of an accident in which the airbags are deployed, the high-voltage system will be automatically deactivated.

■ Access to 12 V Battery

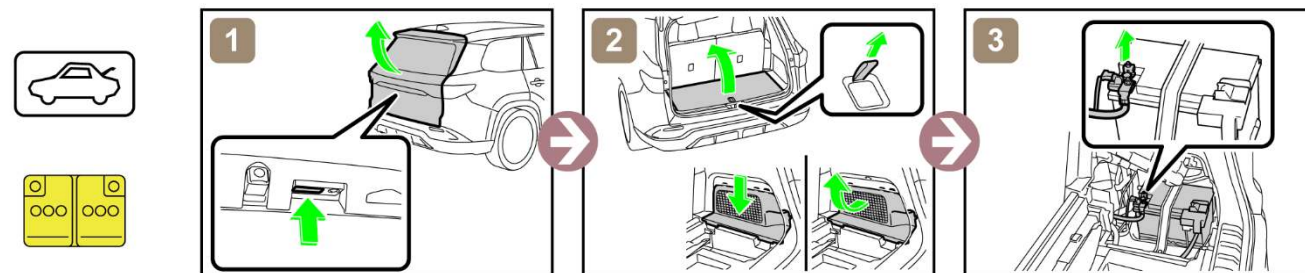

### 4. Access to the occupants

■ Window Glass

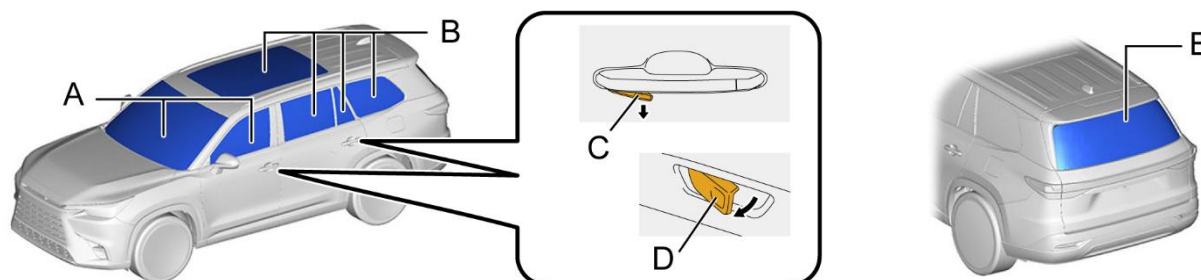


|   |                        |   |                                    |
|---|------------------------|---|------------------------------------|
| A | Laminated              | B | Tempered                           |
| C | Outside Release Handle | D | Inside Release Handle (pull twice) |

|  |         |             |              |       |
|--|---------|-------------|--------------|-------|
|  | ID No.  | Version No. | Version date | Page  |
|  | TXPHV15 | 01          | 09 / 2025    | 3 / 4 |

## 5. Stored energy / Liquids / Gases / Solids



High Voltage Li-ion Battery: 355.2 V



Battery Low Voltage: 12 V



Gasoline Tank: 55 L



Air Conditioner Refrigerant Gas



- ALWAYS WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE) WHEN DEALING WITH ANY OF THESE ITEMS.
- NEVER BREACH OR REMOVE THE BATTERY ASSEMBLY COVER UNDER ANY CIRCUMSTANCES, INCLUDING FIRE. DOING SO MAY RESULT IN SERIOUS INJURY OR DEATH FROM SEVERE BURNS OR ELECTRIC SHOCK.

## 6. In case of fire



USE COPIOUS AMOUNTS OF WATER

If it is difficult to apply copious amounts of water to the high voltage battery, it is recommended to allow the high voltage battery to burn itself out.



RE-IGNITION POSSIBLE !



Gas strut / Preloaded spring


As it is possible for a gas strut / preloaded spring to become a projectile, refer to the component layout drawing.

## 7. In case of submersion



DO NOT TOUCH ANY OF THE HIGH-VOLTAGE COMPONENTS OR CABLES, INCLUDING THE SERVICE PLUG, WHILE THE VEHICLE IS SUBMERGED. DOING SO MAY RESULT IN ELECTRIC SHOCK. WORK ON THE VEHICLE ONLY AFTER THE VEHICLE HAS BEEN PULLED OUT OF THE WATER.

## 8. Towing / Transportation / Storage

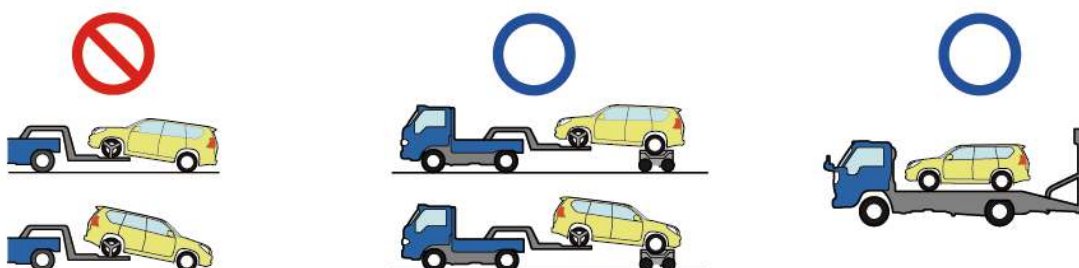

RE-IGNITION POSSIBLE !

Store the vehicle at a safe distance (15 m (49.2 ft) or more) from other vehicles.

## 9. Important additional information

Performance dampers (gas-filled dampers) are installed in the right and left sides of the front and the rear lower structural frame (near the bumpers).

For further details, please refer to "Emergency Response Guide".

<http://www.techinfo.toyota.com>

| ID No.  | Version No. | Version date | Page  |
|---------|-------------|--------------|-------|
| TXPHV15 | 01          | 09 / 2025    | 4 / 4 |