Double Integrator Reach-Avoid Via Dynamic Programming

This example demonstrates how to use the SReachTools toolbox to solve a terminal-hitting time reachavoid problem using dynamic programming.

In this example, we analyze the following problems via dynamic programming for a stochastic system with known dynamics:

- 1. **the terminal-hitting time reach-avoid problem** posed as the stochastic reachability of a target tube problem
- 2. stochastic reachability of a moving target tube

The terminal-hitting time reach-avoid problem computes a controller that maximizes the probability of reaching a target, target_set, at a time horizon, \mathbb{N} , while maintaining the system in a set of safe states, safe_set. This problem is generalized as the problem of stochastic reachability of a target tube --- maximize the probability of staying within a target tube. For reach-avoid problems, the target tube has a specific structure. Finally, we implement a dynamic programming solution to the problem of stochastic reachability of a general target tube.

Double Integrator

In this example we use a discretized double integrator dynamics given by:

$$x_{k+1} = \begin{bmatrix} 1 & T \\ 0 & 1 \end{bmatrix} x_k + \begin{bmatrix} \frac{T^2}{2} \\ T \end{bmatrix} u_k + w_k$$

where T is the discretization time-step, and W_k is the stochastic disturbance.

Notes about this Live Script:

- MATLAB dependencies: This Live Script uses MATLAB's Statistics and Machine Learning Toolbox.
- 2. External dependencies: This Live Script uses Multi-Parameteric Toolbox (MPT).
- 3. Make sure that srtinit is run before running this script.

This Live Script is part of the SReachTools toolbox. License for the use of this function is given in https://github.com/abyvinod/SReachTools/blob/master/LICENSE.

Setup the system

```
% discretization parameter
T = 0.25;
% define the system
sys = LtiSystem('StateMatrix', [1, T; 0, 1], ...
    'InputMatrix', [T^2/2; T], ...
    'InputSpace', Polyhedron('lb', -0.1, 'ub', 0.1), ...
    'DisturbanceMatrix', eye(2), ...
    'Disturbance', StochasticDisturbance('Gaussian', zeros(2,1), 0.01*eye(2)));
```

Setup the target and safe sets

```
% safe set definition


safe_set = Polyhedron('lb', [-1, -1], 'ub', [1, 1]);

target_set = Polyhedron('lb', [-0.5, -0.5], 'ub', [0.5, 0.5]);
```

Setup the target tube

Target tube is a generalization of the reach problem. The reach avoid target-tube is created by setting the first N = 1 sets in the tube as the safe_set and the final set as the target_set.

```
% in target tube for the viability problem is equivalent to a tube of repeating
% safe sets
target tube = { safe set, ...
                target set};
% Plotting of target tube
figure()
hold on
for time indx=1:5
    target tube at time indx = Polyhedron('H',[target tube{time indx}.A,zeros(size(target tube
    plot(target tube at time indx, 'alpha', 0.25);
    axis([-1 1 -1 1 0 time indx]);
end
box on;
grid on;
xlabel('x');
ylabel('y');
zlabel('time');
title('Target tube');
```

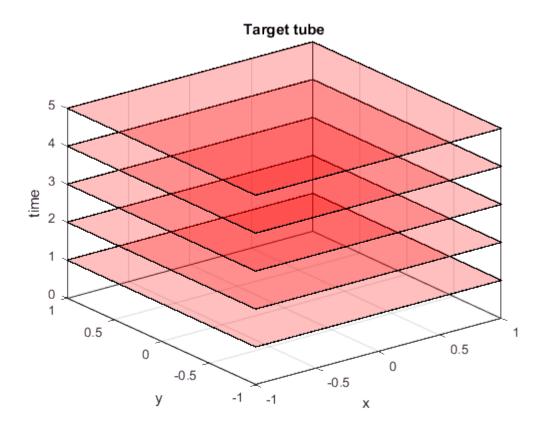

```
N = length(target_tube);
```


Dynamic programming recursion via gridding

For dynamic programming, we need to create a grid over which we will perform the recursion

```
% need to create a state space grid and input space grid
ss_grid = SpaceGrid([-1, -1], [1, 1], 40);
in_grid = InputGrid(-1, 1, 20);

grid_probability = getDynProgSolForTargetTube(sys, ...
    ss_grid, in_grid, target_tube);


figure(1);
ss_grid.plotGridProbability(grid_probability);
view(0, 90)
```

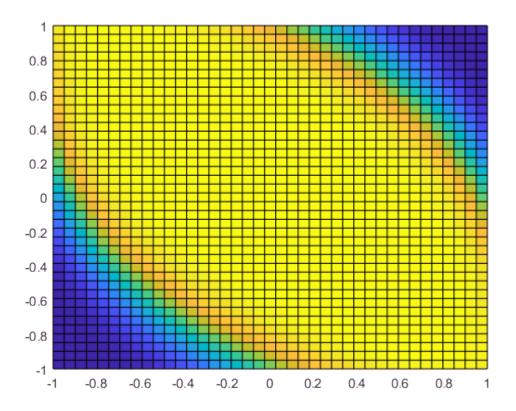

Reachability of a target tube for moving target problems

The advantage of target tube is that it allows for problem formulations in which we would like to reach a moving target.

```
Polyhedron('lb', [-1, -1], 'ub', [0.5, 0.5]), ...
   Polyhedron('lb', [-1, -0.5], 'ub', [0.5, 1]), ...
Polyhedron('lb', [-0.5, -0.5], 'ub', [1, 1])};
% Plotting of target tube
figure()
hold on
for time indx=1:5
    target tube at time indx = Polyhedron('H',[target tube{time indx}.A,zeros(size(target tube
    plot(target tube at time indx, 'alpha', 0.25);
    axis([-1 1 -1 1 0 time indx]);
end
box on;
grid on;
xlabel('x');
ylabel('y');
zlabel('time');
title('Target tube');
```

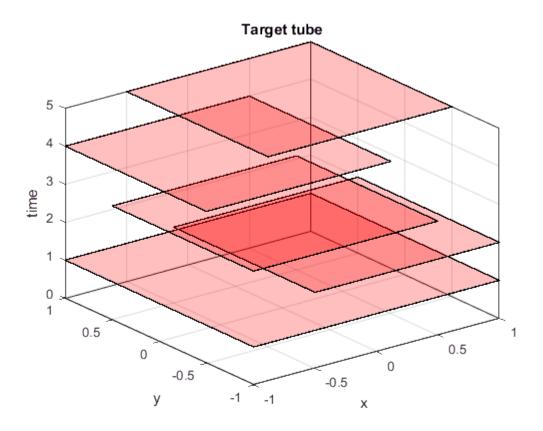

Dynamic programming solution on target tube

```
ss_grid = SpaceGrid([-1, -1], [1, 1], 40);
in_grid = InputGrid(-0.1, 0.1, 3);

grid_probability = getDynProgSolForTargetTube(sys, ...
    ss_grid, in_grid, target_tube);

figure(2);
ss_grid.plotGridProbability(grid_probability);
view(0, 90)
```

