




Front Elevation
SCALE: 1/4" = 1'-0"

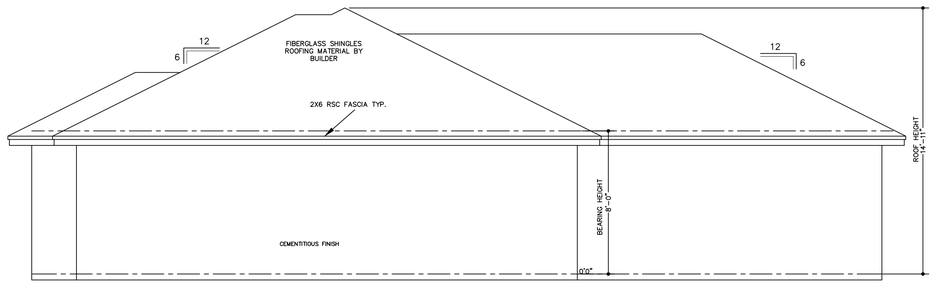

Right Elevation
SCALE: 1/4" = 1'-0"

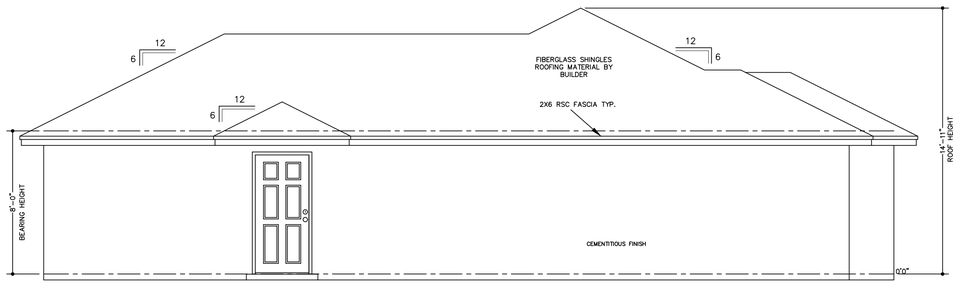

Left Elevation
SCALE: 1/4" = 1'-0"

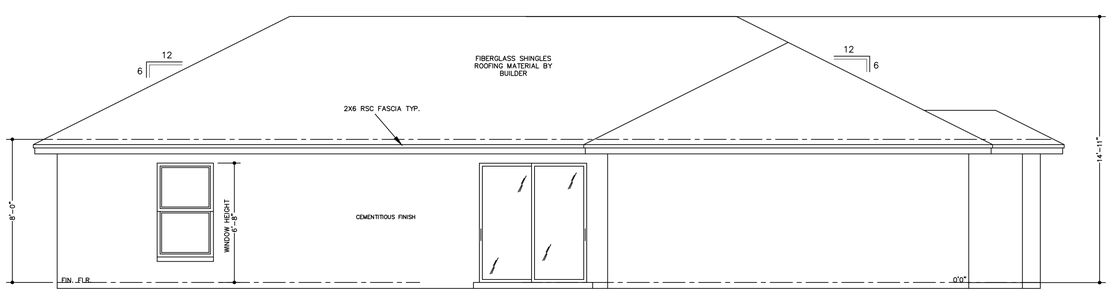

Rear Elevation
SCALE: 1/4" = 1'-0"

© COPY RIGHT
KIMSA CONSTRUCTION LLC
ALL RIGHTS RESERVED

JOB # 2025-713

DATE: 09/3/2025

DRAWING BY:

KIMSA CONSTRUCTION LLC

EMAIL: KIMSACONSTRUCTIONCORP@GMAIL.COM

PHONE:
352-581-9844
973-508-7387

ADDRESS:
780 SE 64TH TERRACE OCALA
FL 34472

DESIGN MODEL FOR:

MODEL NAME: "UTAH/ ANEXO MODEL"

PARCEL #:

DRAWING BY: A.C

SCALE: 1/4"=1'-0"

REVIEW NOTES:

ENGINEERING NOTES:

1. DESIGN WIND LOAD= 130MPH (Vult)
2. ASSUMED SOIL BEARING= 2000psf
3. DESIGN LIVE LOADS:
   ROOF= 20psf
   FLOOR= 40psf
4. DESIGN DEAD LOADS:
   ROOF= 17psf
   FLOOR= 15psf
   ALL OTHER ACTUAL WEIGHTS OF MATERIALS

DESIGN CRITERIA:

- FLORIDA BUILDING CODE RESIDENTIAL 8TH. EDITION(2023)
- ASCE 7-22
- 130 mph WIND SPEED (Vult) 101 MPH (Vasd)
- WIND EXPOSURE "C"
- WIND IMPORTANCE FACTOR: 1
- RISK CATEGORY II
- BUILDING CLASSIFICATION "R-3" TYPE V-B
- ALL OPENINGS IN EXTERIOR WALLS TO RESIST P.S.F. REQUIREMENTS PER TABLE R301.2(2)
- ENCLOSED INTERNAL PRESSURE COEFFICIENT= +/-0.18
- PARTIALLY ENCLOSED INTERNAL PRESSURE COEFFICIENT= +/-0.55
- ICC 600-20 STD. FOR RESIDENTIAL CONSTRUCTION IN HIGH-WIND AREAS