


Overflow DN400

Inlet DN225

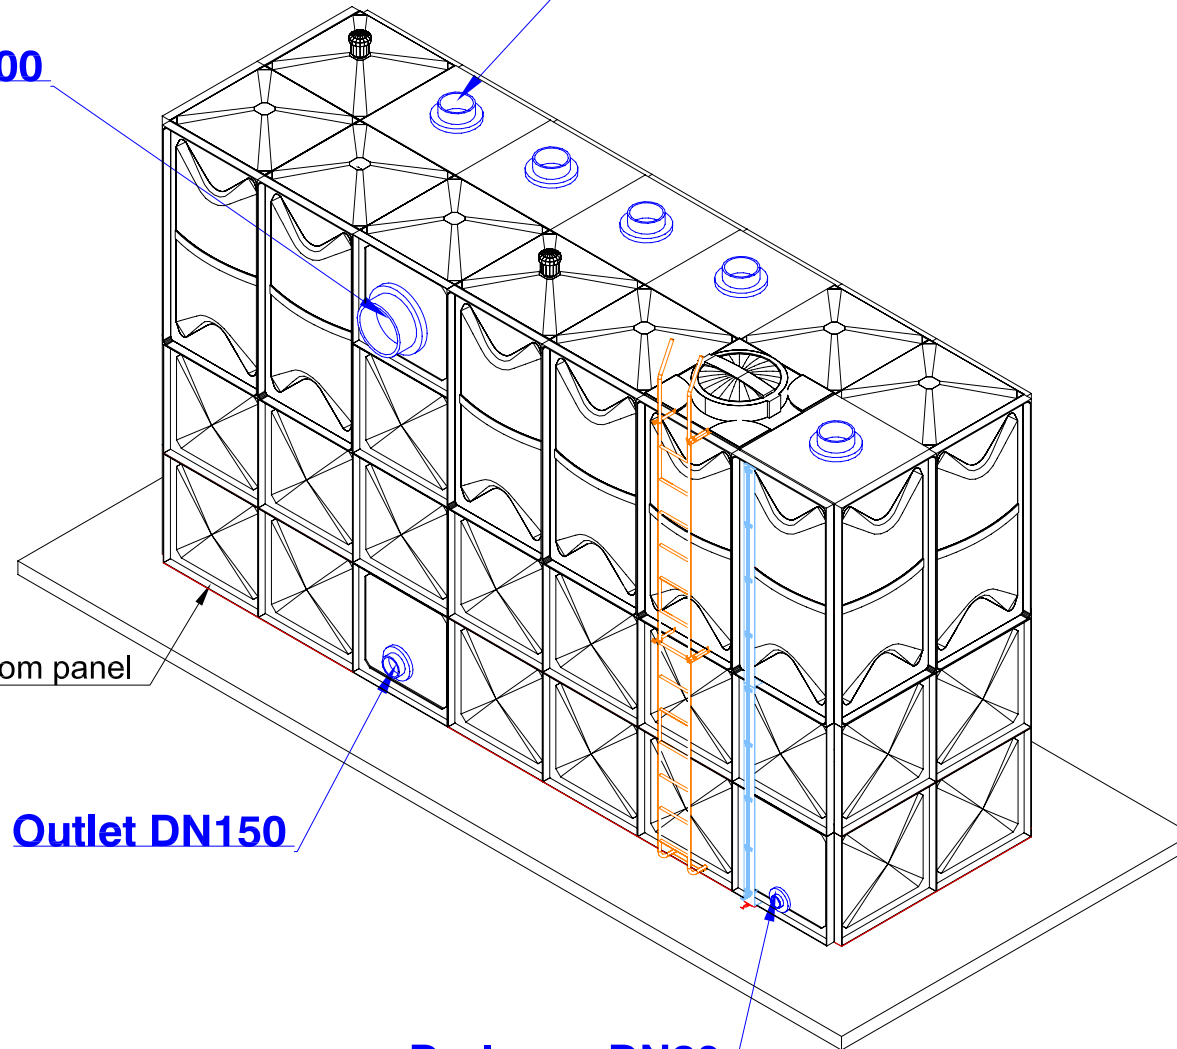

TANK-AXONOMETRIC

Note:

Overflow shall be twice the area of inlet to avoid overfilling.

TANK COMPONENTS

No.	Description	Material	Qty	Remarks
1	Water tank	G.R.P.	1	
2	Manhole Cover	G.R.P.	1	S/S Hinges & Locks
3	Internal Ladder	G.R.P.	1	Height : 4m
4	External Ladder	SS/A4	1	Height : 4m
5	Air vent	PVC	2	Light & Insect Proof 4" Cowl Type
6	Inlet	U.P.V.C	10	DN225
7	Outlet	U.P.V.C	2	DN150
8	Drainage	U.P.V.C	2	DN80
9	Overflow	U.P.V.C	2	DN400
10	Water Level Gage	GRP/ACRYLIC	1	Height : 4m

GENERAL CAUTIONS

NOTES:

1. Allow a minimum space of 50 cm all around the tank's foundation.
2. Maximum allowable deviation in concrete foundation = +/- 2mm.
3. For sizes of items 6, 7, 8, 9 & 10, please refer to catalogue.
4. Overflow shall be twice the area of inlet to avoid overfilling.
5. Overflow shall flow freely to the ground.
6. All pipes, fittings and other accessories shall be self supported.
7. Tank to be electrically grounded in case of internal tie rod reinforcement.

ATM Tanks Panel Type Water Tank

Tank size:	7x2x4m HIGH		
Capacity:	56 m ³	14,793 USG	12,318 ImpG
Bolts / Nuts:	S/S(A4) Internally & GI Externally		
Insulation:	Non Insulated		

Order No.:

Project Name:


Contractor:

Consultant:

Reference No.		Scale	Page No.
Done By		Approved By	
Revisions			
No.	Date	Description	Rev By

ATM
52/1014 Currumbin Creek Road,
Currumbin Waters QLD 4223
1800 422 444
info@atmtanks.com.au
atmtanks.com.au

Copyright ATM Tanks Group

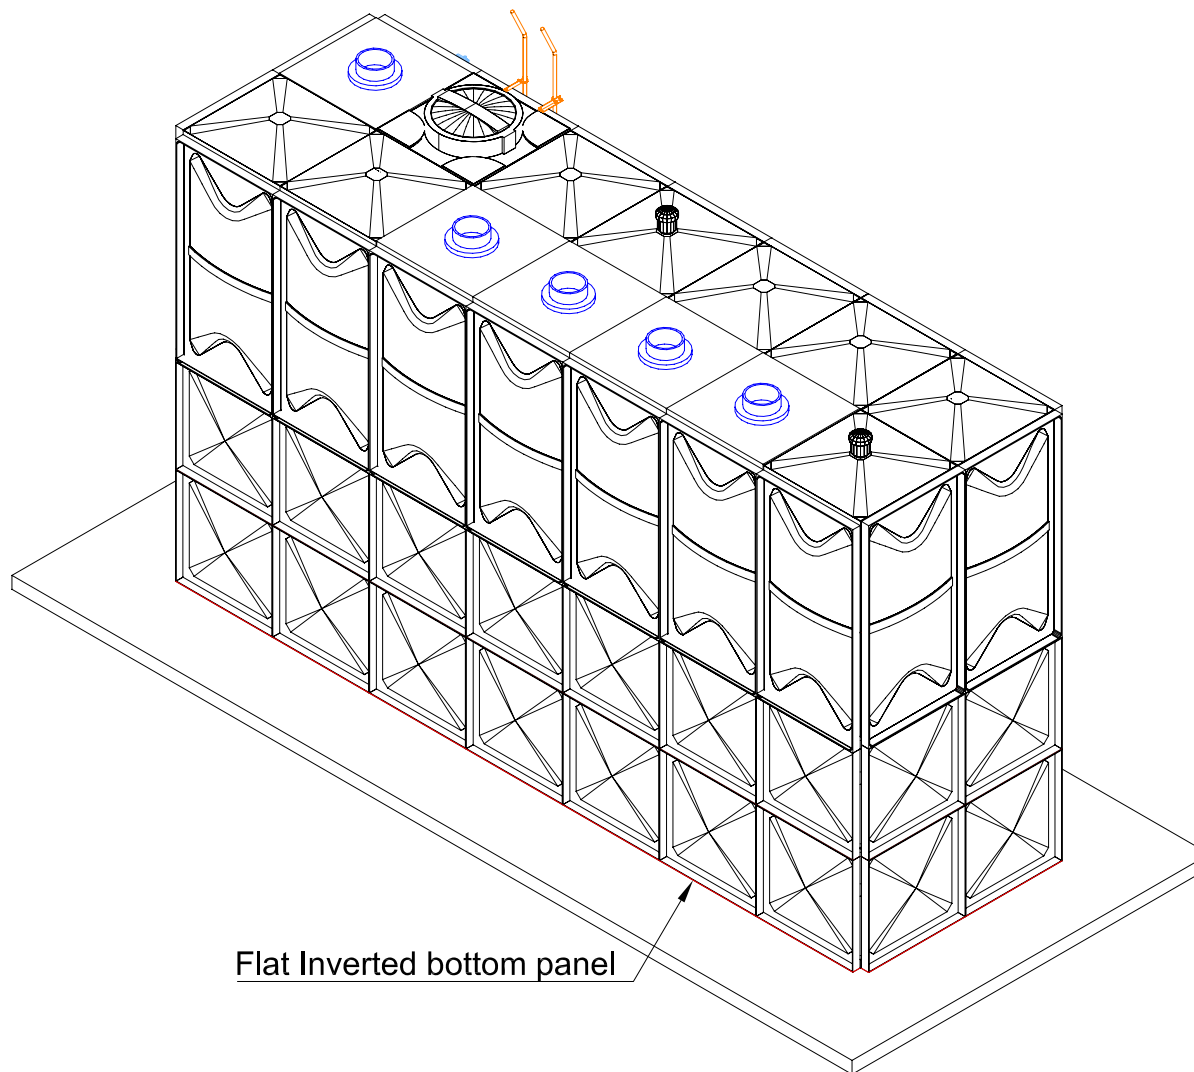

Flat Inverted bottom panel

TANK-AXONOMETRIC

TANK COMPONENTS

No.	Description	Material	Qty	Remarks
1	Water tank	G.R.P.	1	
2	Manhole Cover	G.R.P.	1	S/S Hinges & Locks
3	Internal Ladder	G.R.P.	1	Height : 4m
4	External Ladder	SS/A4	1	Height : 4m
5	Air vent	PVC	2	Light & Insect Proof 4" Cowl Type
6	Inlet	U.P.V.C	10	DN225
7	Outlet	U.P.V.C	2	DN150
8	Drainage	U.P.V.C	2	DN80
9	Overflow	U.P.V.C	2	DN400
10	Water Level Gage	GRP/ACRYLIC	1	Height : 4m

GENERAL CAUTIONS

NOTES:

1. Allow a minimum space of 50 cm all around the tank's foundation.
2. Maximum allowable deviation in concrete foundation = +/- 2mm.
3. For sizes of items 6, 7, 8, 9 & 10, please refer to catalogue.
4. Overflow shall be twice the area of inlet to avoid overfilling.
5. Overflow shall flow freely to the ground.
6. All pipes, fittings and other accessories shall be self supported.
7. Tank to be electrically grounded in case of internal tie rod reinforcement.

ATM Tanks Panel Type Water Tank

Tank size:	7x2x4m HIGH		
Capacity:	56 m ³	14,793 USG	12,318 ImpG
Bolts / Nuts:	S/S(A4) Internally & GI Externally		
Insulation:	Non Insulated		

Order No.:

Project Name:


Contractor:

Consultant:

Reference No.		Scale	Page No.
Done By		Approved By	
Revisions			
No.	Date	Description	Rev By

ATM
 52/1014 Currumbin Creek Road,
 Currumbin Waters QLD 4223
 1800 422 444
 info@atmtanks.com.au
 atmtanks.com.au

Copyright ATM Tanks Group

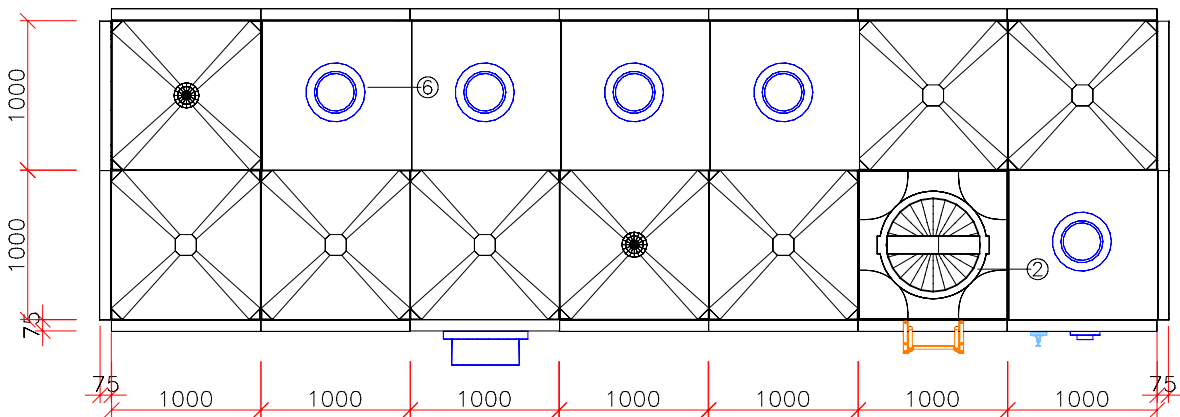

TANK-PLAN

TANK COMPONENTS

No.	Description	Material	Qty.	Remarks
1	Water tank	G.R.P.	1	
2	Manhole Cover	G.R.P.	1	S/S Hinges & Locks
3	Internal Ladder	G.R.P.	1	Height : 4m
4	External Ladder	SS/A4	1	Height : 4m
5	Air vent	PVC	2	Light & Insect Proof 4" Cowl Type
6	Inlet	U.P.V.C	10	DN225
7	Outlet	U.P.V.C	2	DN150
8	Drainage	U.P.V.C	2	DN80
9	Overflow	U.P.V.C	2	DN400
10	Water Level Gage	GRP/ACRYLIC	1	Height : 4m

GENERAL CAUTIONS

NOTES:

1. Allow a minimum space of 50 cm all around the tank's foundation.
2. Maximum allowable deviation in concrete foundation = +/- 2mm.
3. For sizes of items 6, 7, 8, 9 & 10, please refer to catalogue.
4. Overflow shall be twice the area of inlet to avoid overfilling.
5. Overflow shall flow freely to the ground.
6. All pipes, fittings and other accessories shall be self supported.
7. Tank to be electrically grounded in case of internal tie rod reinforcement.

ATM Tanks Panel Type Water Tank

Tank size:	7x2x4m HIGH		
Capacity:	56 m ³	14,793 USG	12,318 ImpG
Bolts / Nuts:	S/S(A4) Internally & GI Externally		
Insulation:	Non Insulated		

Order No.:

Project Name:

Contractor:


Consultant:

Reference No.		Scale	Page No.
Done By		Approved By	
Revisions			
No.	Date	Description	Rev By

ATM
52/1014 Currumbin Creek Road,
Currumbin Waters QLD 4223
1800 422 444
info@atmtanks.com.au
atmtanks.com.au

Copyright ATM Tanks Group

TANK-RIGHT ELEVATION

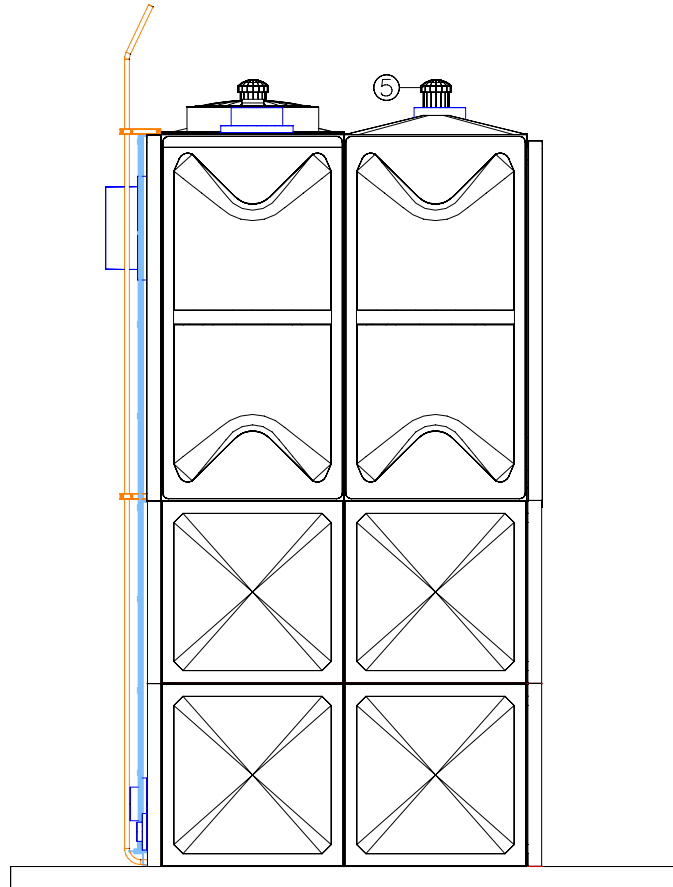

TANK COMPONENTS

No.	Description	Material	Qty	Remarks
1	Water tank	G.R.P.	1	
2	Manhole Cover	G.R.P.	1	S/S Hinges & Locks
3	Internal Ladder	G.R.P.	1	Height : 4m
4	External Ladder	SS/A4	1	Height : 4m
5	Air vent	PVC	2	Light & Insect Proof 4" Cowl Type
6	Inlet	U.P.V.C	10	DN225
7	Outlet	U.P.V.C	2	DN150
8	Drainage	U.P.V.C	2	DN80
9	Overflow	U.P.V.C	2	DN400
10	Water Level Gage	GRP/ ACRYLIC	1	Height : 4m

GENERAL CAUTIONS

NOTES:

1. Allow a minimum space of 50 cm all around the tank's foundation.
2. Maximum allowable deviation in concrete foundation = +/- 2mm.
3. For sizes of items 6, 7, 8, 9 & 10, please refer to catalogue.
4. Overflow shall be twice the area of inlet to avoid overfilling.
5. Overflow shall flow freely to the ground.
6. All pipes, fittings and other accessories shall be self supported.
7. Tank to be electrically grounded in case of internal tie rod reinforcement.

ATM Tanks Panel Type Water Tank

Tank size:	7x2x4m HIGH		
Capacity:	56 m ³	14,793 USG	12,318 ImpG
Bolts / Nuts:	S/S(A4) Internally & GI Externally		
Insulation:	Non Insulated		

Order No.:

Project Name:


Contractor:

Consultant:

Reference No.		Scale	Page No.
Done By		Approved By	
Revisions			
No.	Date	Description	Rev By

ATM
52/1014 Currumbin Creek Road,
Currumbin Waters QLD 4223
1800 422 444
info@atmtanks.com.au
atmtanks.com.au

Copyright ATM Tanks Group

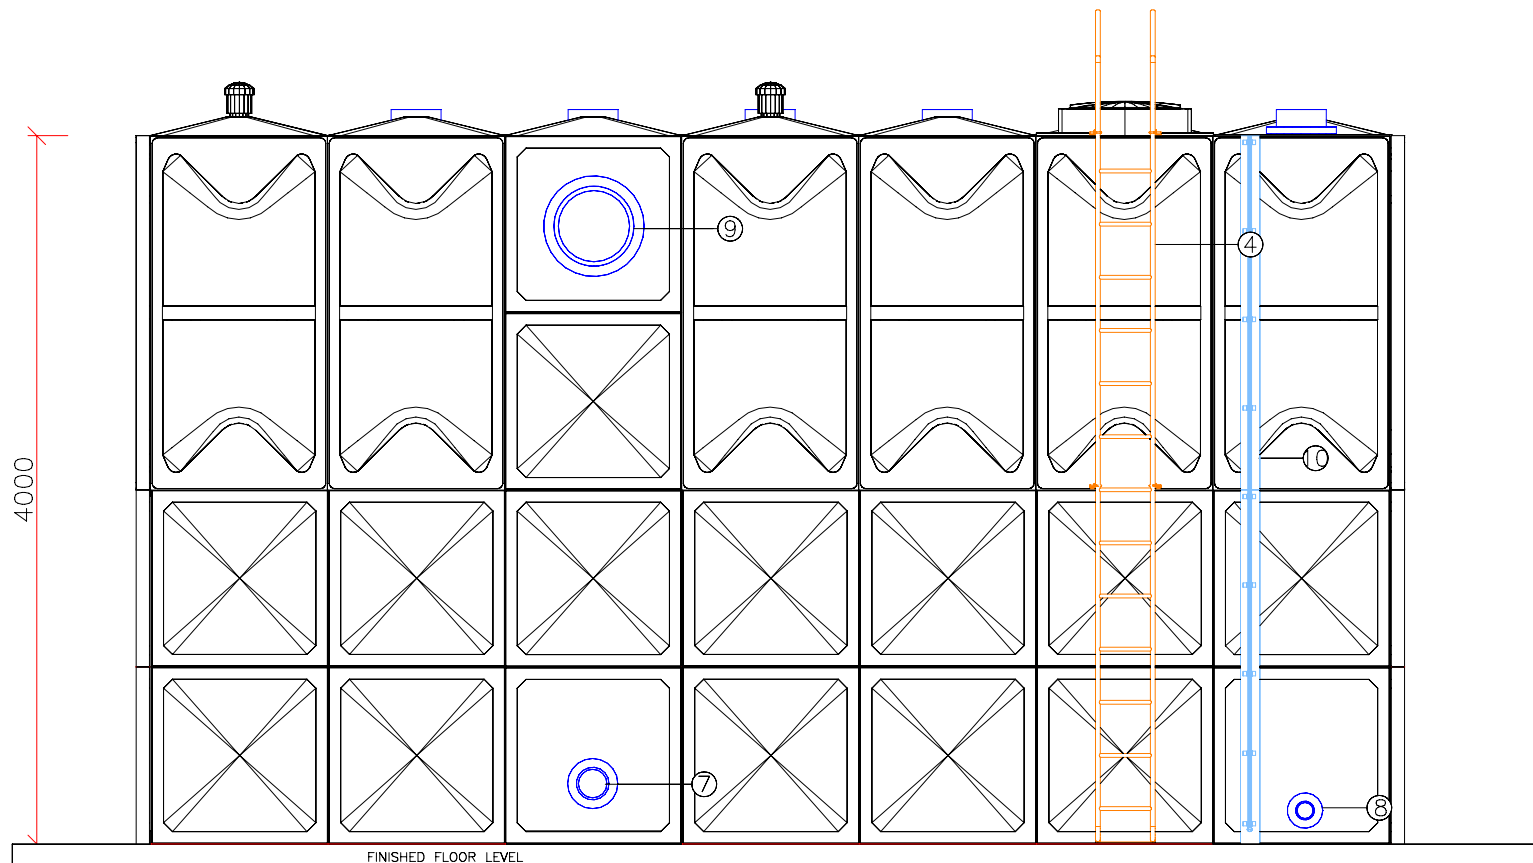

FRONT ELEVATION

TANK COMPONENTS

No.	Description	Material	Qty.	Remarks
1	Water tank	G.R.P.	1	
2	Manhole Cover	G.R.P.	1	S/S Hinges & Locks
3	Internal Ladder	G.R.P.	1	Height : 4m
4	External Ladder	SS/A4	1	Height : 4m
5	Air vent	PVC	2	Light & Insect Proof 4" Cow Type
6	Inlet	U.P.V.C	10	DN225
7	Outlet	U.P.V.C	2	DN150
8	Drainage	U.P.V.C	2	DN80
9	Overflow	U.P.V.C	2	DN400
10	Water Level Gage	GRP/ACRYLIC	1	Height : 4m

GENERAL CAUTIONS

NOTES:

1. Allow a minimum space of 50 cm all around the tank's foundation.
2. Maximum allowable deviation in concrete foundation = +/- 2mm.
3. For sizes of items 6, 7, 8, 9 & 10, please refer to catalogue.
4. Overflow shall be twice the area of inlet to avoid overfilling.
5. Overflow shall flow freely to the ground.
6. All pipes, fittings and other accessories shall be self supported.
7. Tank to be electrically grounded in case of internal tie rod reinforcement.

ATM Tanks Panel Type Water Tank

Tank size:	7x2x4m HIGH		
Capacity:	56 m ³	14,793 USG	12,318 ImpG
Bolts / Nuts:	S/S(A4) Internally & GI Externally		
Insulation:	Non Insulated		

Order No.:

Project Name:

Contractor:

Consultant:

Reference No.		Scale	Page No.
Done By		Approved By	
Revisions			
No.	Date	Description	Rev By