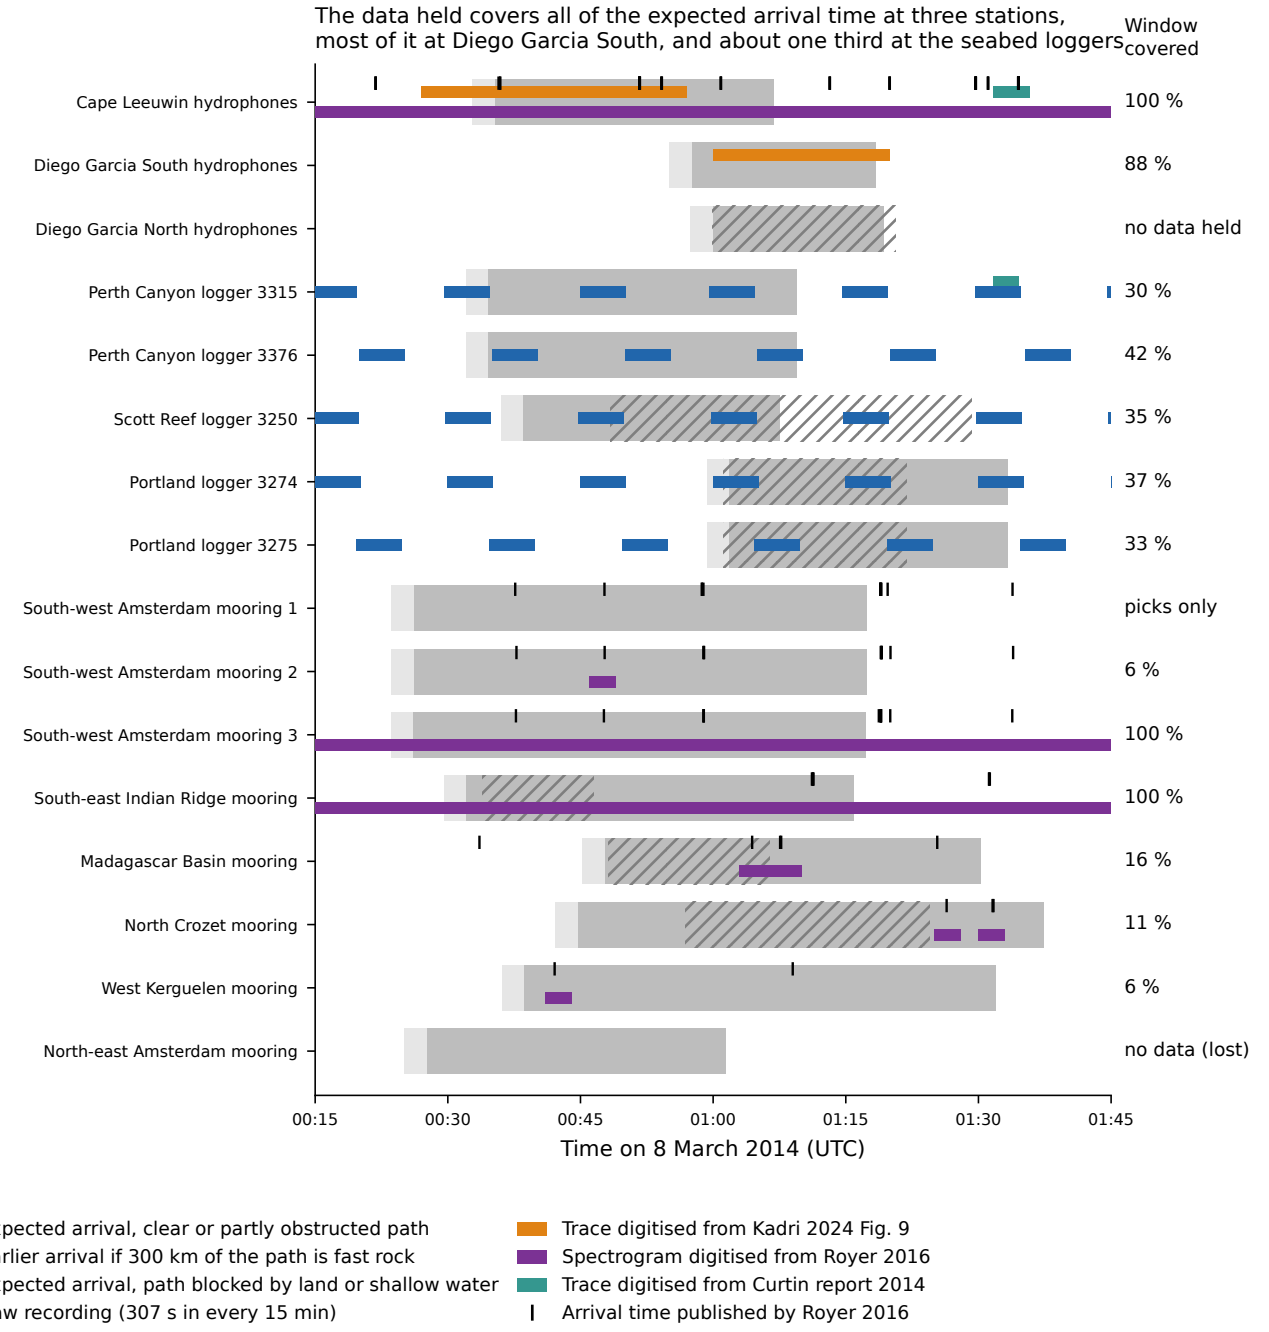

Notes. Expected arrival = impact time plus travel time only (no signal level is used). Impact positions: the 7th arc (sea-level arc at 00:19, file arcs-sea-level.csv) at every 1 degree from 20 S to 41 S, and 25 and 50 nautical miles to each side of the arc (110 positions). Impact time: 00:19:38 to 00:29:44 UTC. Travel time: shortest path on the WGS84 ellipsoid, made up to 5 % longer to allow for a path around obstacles, at a sound speed of 1.40 to 1.56 km/s. This speed range includes all sound speeds possible in sea water on these paths (1.44 to 1.558 km/s) and the speeds found from the arrivals Royer 2016 published (1.467 to 1.519 km/s, 105 paths). Light grey: a separate test in which 300 km of the path next to the receiver goes through rock at up to 8.1 km/s. Blocked path: the line crosses land, or water shallower than the hydrophone or 200 m, more than 20 km from the receiver (GEBCO 2026 depths; the same rule as the project database, which it matches on 352 of 352 test paths). Diego Garcia North is blocked from 100 of 110 positions and is not used. Percent covered: part of the station window (clear or partly obstructed paths only) that has continuous data in any form. Recordings at Cape Leeuwin and Diego Garcia South are not held; only figures digitised from publications are held. Black ticks: arrival times in Royer 2016 Table 5, only for events Royer located. The Royer spectrogram is a reading of published colours; its colour scale saturates. The North-east Amsterdam mooring was deployed but its data was lost. Data source: project hydroacoustic database (hydro_data.sqlite) and the raw Curtin IMOS logger files.