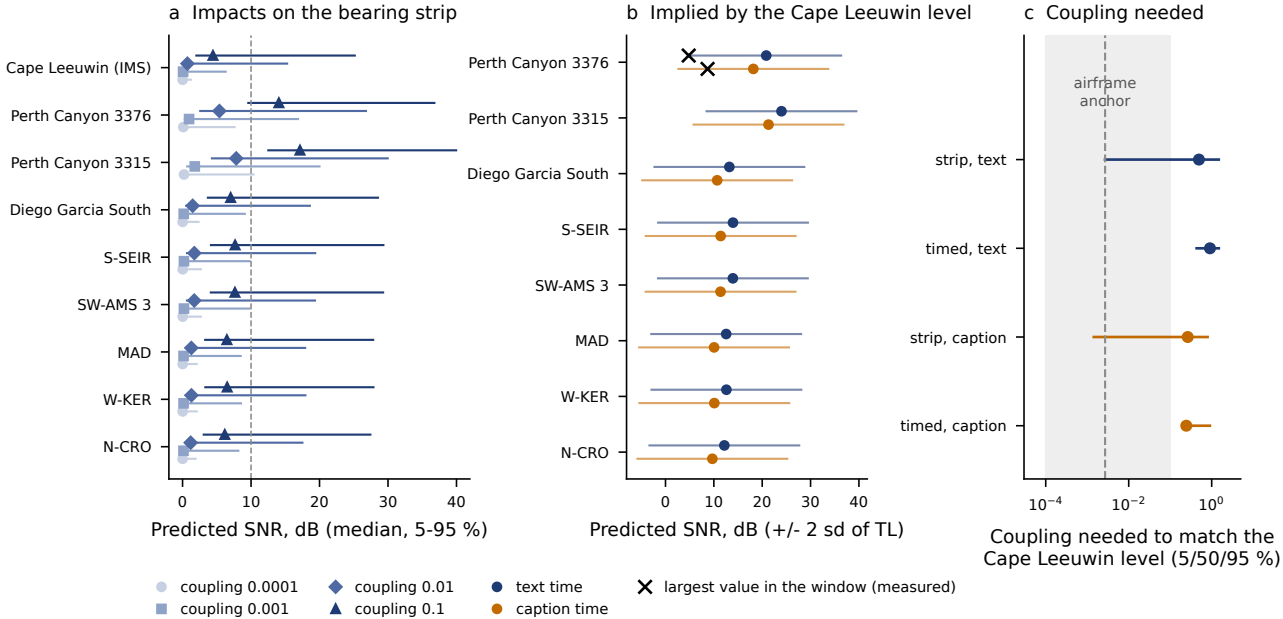

(i) Panel a shows how loud the impact sound would be at each station for four values of the coupling. Panel b uses the measured level at Cape Leeuwin and shows the level that the other stations would then get. Crosses show the largest level that Perth Canyon measured. Panel c shows the coupling that the Cape Leeuwin level needs. The grey band is the coupling range that we use.

(ii) Source posterior: run J, 74 seeds, headline 'D2 total q=0.333 (C2 silent)' (00:19 option D2, log-on cause mixture p=0.75, C2 silent); strip = bearing 306.18 +/-1 deg, arc -60 to +250 km (ESS 172; timed subsets weighted by the pre-registered H01W arrival term, ESS 11 text / 5 caption, provisional). Physics: SE = eta E rho c/2pi sum S_b(tau90) 10^(-TL/10); TL BORROWED from the nearest committed path (31.6 S 96.8 E), range-adjusted, sd 7.9 dB; propagation slope misfit +10 dB/oct (H01W) and coupling uncertainty apply; OHASISBIO noise and TL are H08S proxies, ridge loss not included. Measured level: digitised Kadri Fig. 9c, max 1 s mean-square excess 0.128 / 0.069 Pa^2. Search case and ocean model: n/a. Excluded: NE-AMS, H08N, Portland, Scott Reef.