Run C sensitivity: impact duration from the end-of-flight water-entry model. UNCONVERGED (core (b) split-half not converged). Sensitivity only, not a likelihood.

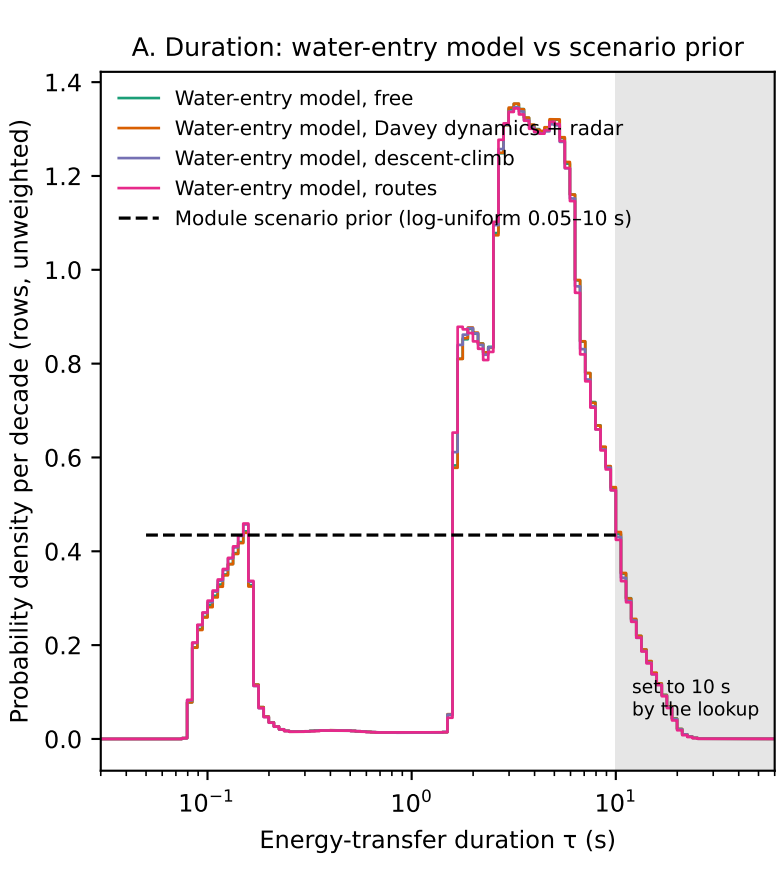

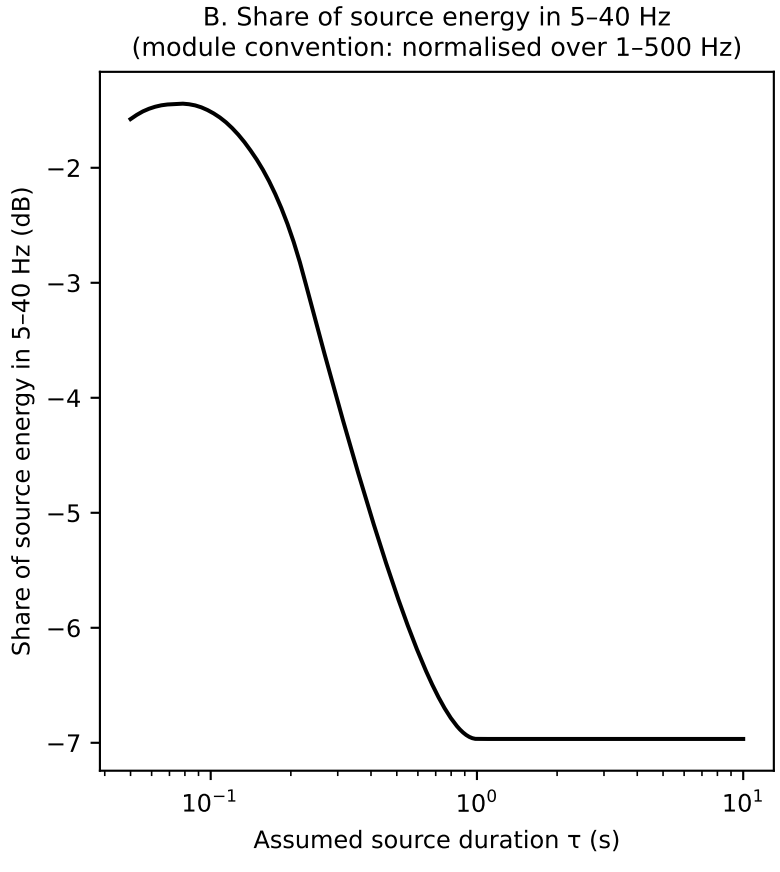

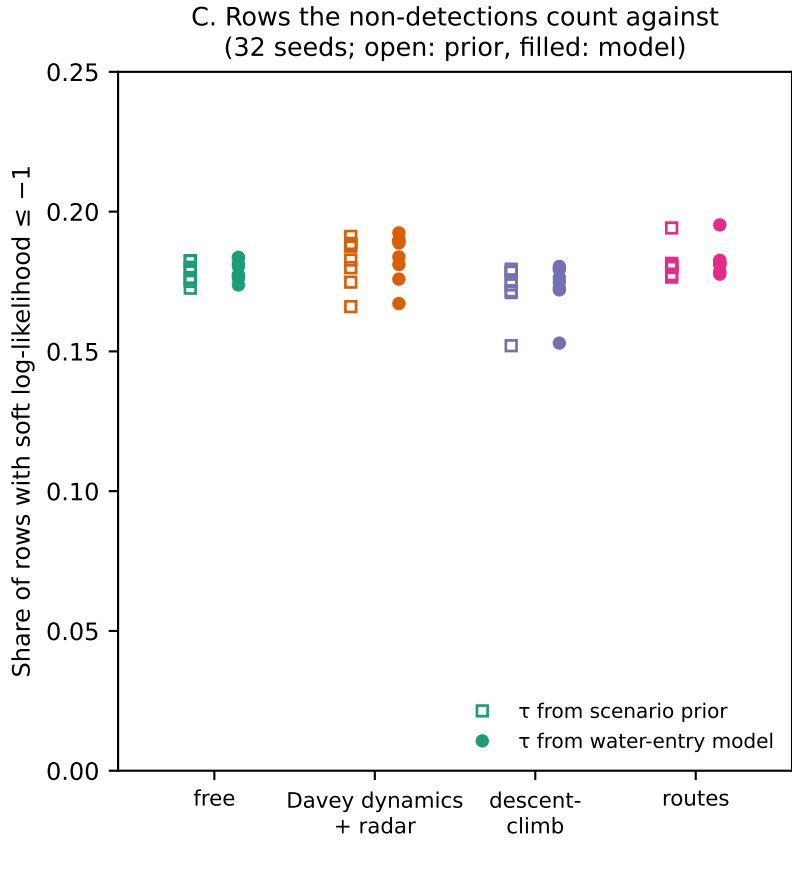

STE100: Panel A compares two sets of values for how long the impact puts energy into the water: the new end-of-flight model and the range the module used before. The model gives longer durations for most rows (ditching), and short ones for steep dives. Panel B: a longer duration puts less energy into the band the hydrophones use, but only up to 1 s. The module sets its coupling from the F-35A at each duration, so most of this effect cancels. Panel C: the share of rows that the 'no signal seen' evidence counts against is almost the same with both duration sets. The change does not move the result.

Technical: module writer per_impact_lnl.py (amendment 2 daa7abc3, fix 3b5b4446; --calerr structured --noise blackman), nuisance stream unchanged, only τ replaced by tau90_v1.npz (impact_tau_method = 1, ruling 8dbefed2; results/eof-impact-tau-method-oct11.md); mechanical τ90 used as acoustic source duration (stand-in assumption, module to rule). lnL_soft is the exploratory near-limit term (borrowed IMS P_D, TL NOT CALIBRATED). 32 seed(s); paired Δ lnL_soft per row: median of seed means -0.0067, worst seed q01/q99 -0.44/+0.31. Rows unweighted (as the module's own summary); ~6% of rows have τ > 10 s, clamped by the module's lookup; band fraction ESD flat to 1/τ then f^-2, normalised over 1–500 Hz (audit F7), so it is constant for τ > 1 s; η_cal(τ) is inverted from the F-35A at each τ, so S_b(τ) cancels except through the TL spectral shape difference between the F-35A path and each impact path.