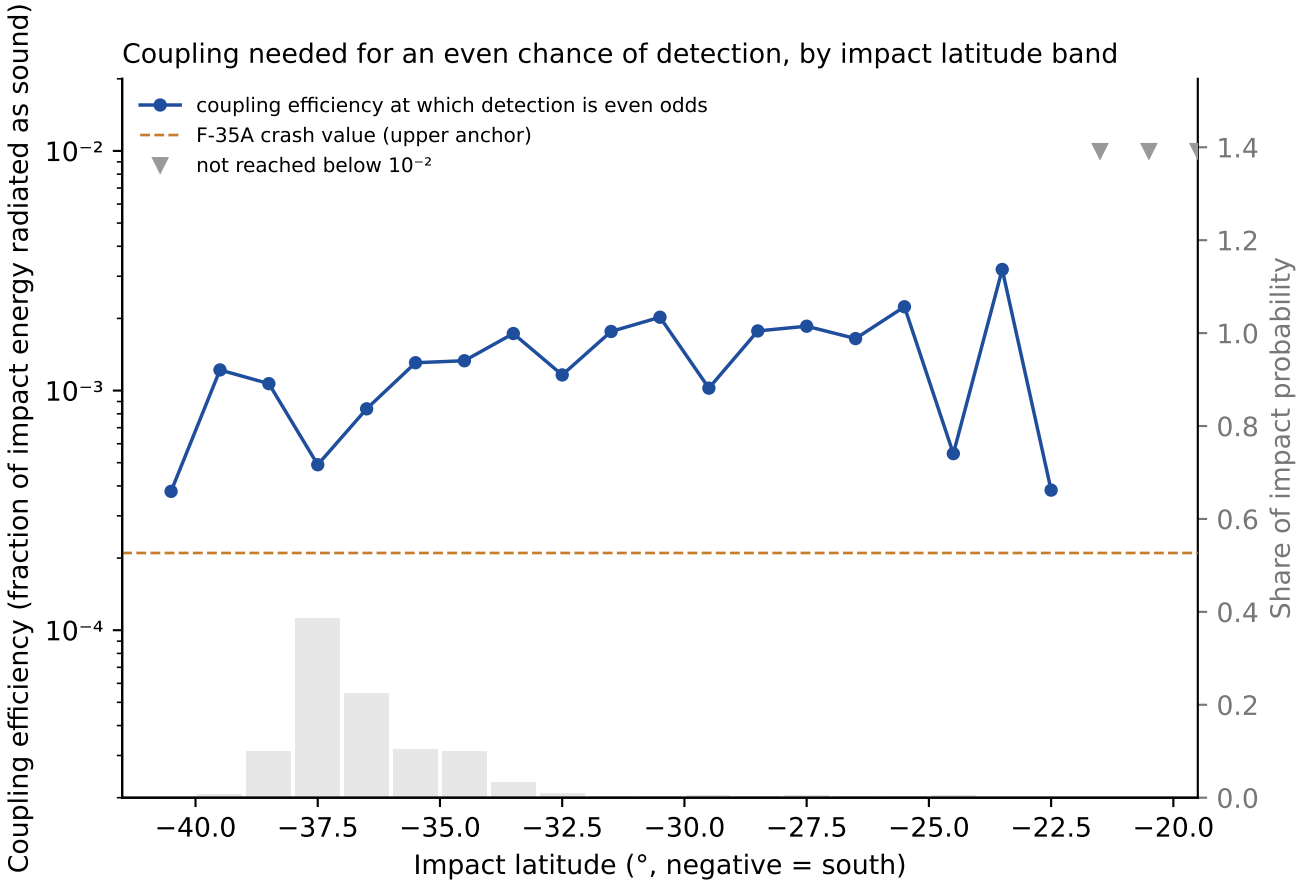

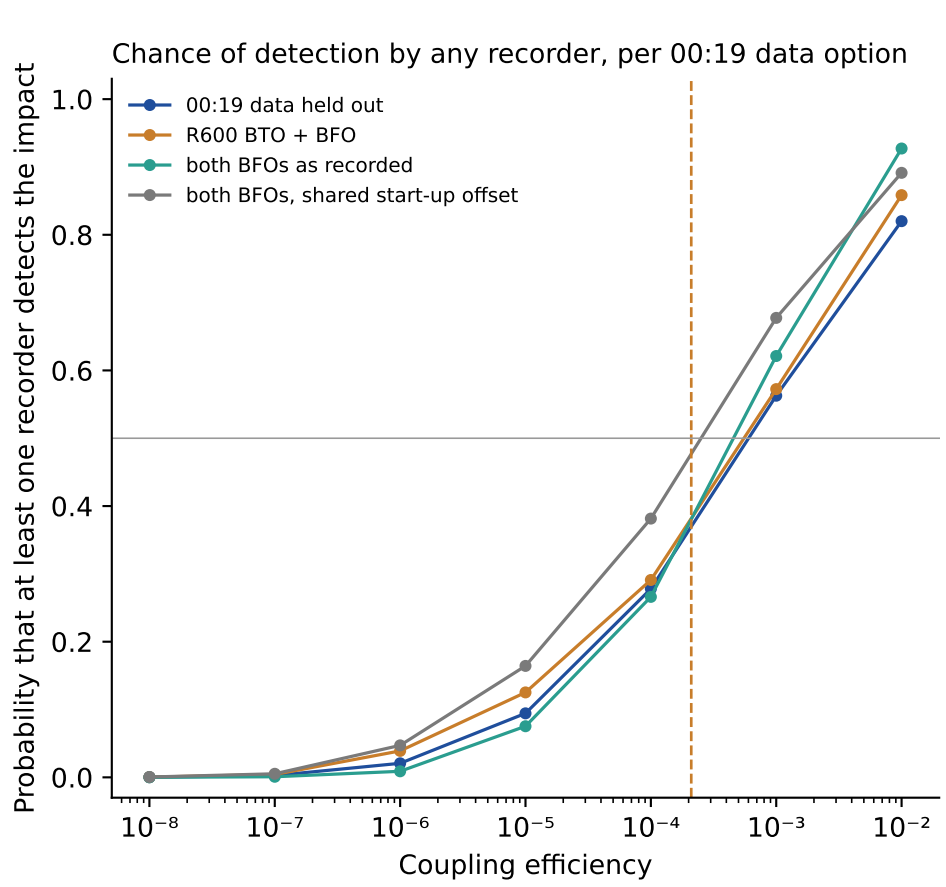

(i) Left: for impacts in each one-degree latitude band, the fraction of the impact's energy that would have to become sound for there to be a 50 % chance that at least one recorder detects it (lower = easier to detect). Grey bars show where the flight model puts the impact. Right: the chance of a detection by any recorder as the coupling fraction is varied, for the four ways of using the last satellite data. The dashed line is the one measured aircraft crash. Estimates only; the sound loss along each path is provisional and the coupling of a 777 impact has never been measured.

(ii) Block 7 eta mapping (eta_map.py). Source posterior = run J, 1-in-4 thin of a 74-seed chunk subsample (925,000 rows), p = 0.5 (left) and per option at p = 0.5 (right); weights = EoF total q = 1/3 cell with survival factor, p_core pooling. SPL = 10 log10(eta E rho c / 2 pi sum_b S_b(tau) 10^(-TL_b/10) / T_eff / 1e-12), E = contact KE, one-pole source (f^-2 above 1/tau), tau = tau90 (method 1), T_eff from this block's templates; TL: IMOS loggers = module RAM-corrected quantile-path table (38.5-31.6 S, clamped beyond); H01W/H08S = block 2 grid pass A (PROVISIONAL, on-arc sources, source 10 m); calibration error L ~ N(0, 10 dB) per row; H01W/H08S +4.8 dB triad gain (labelled); P_D from this block's M1b logistic fits at alpha 0.01 per 60 s window; P_D(any) = 1 - prod(1 - P_D_r) over 3376, 3274, 3315, 3275, H01W, H08S; H08N blocked, 3250 no-information. eta_50 (D0', p 0.5, with cal error) = 6.11e-04. Rows north of 20 S: TL pending (grid). Caveats C1, C2. PREDICTIVE, NOT CALIBRATED.