


MH370 posterior - bto-bfo-gain-conditional

MH370 00:11 release comparison: ERA5 constant-true-track control | 5 independent seeds | canonical Rust estimator

Estimate at a glance

POOLED PARTICLES	INDEPENDENT SEEDS
150000	5
POSTERIOR MEAN	90% LATITUDE
36.409 deg S, 89.492 deg E	37.11 deg S to 35.89 deg S
90% LONGITUDE	NUMERICAL CONVERGENCE
88.38 deg E to 90.27 deg E	passed
SEED MEAN SEPARATION	LOG-EVIDENCE RANGE
1.4 NM	0.110 nats

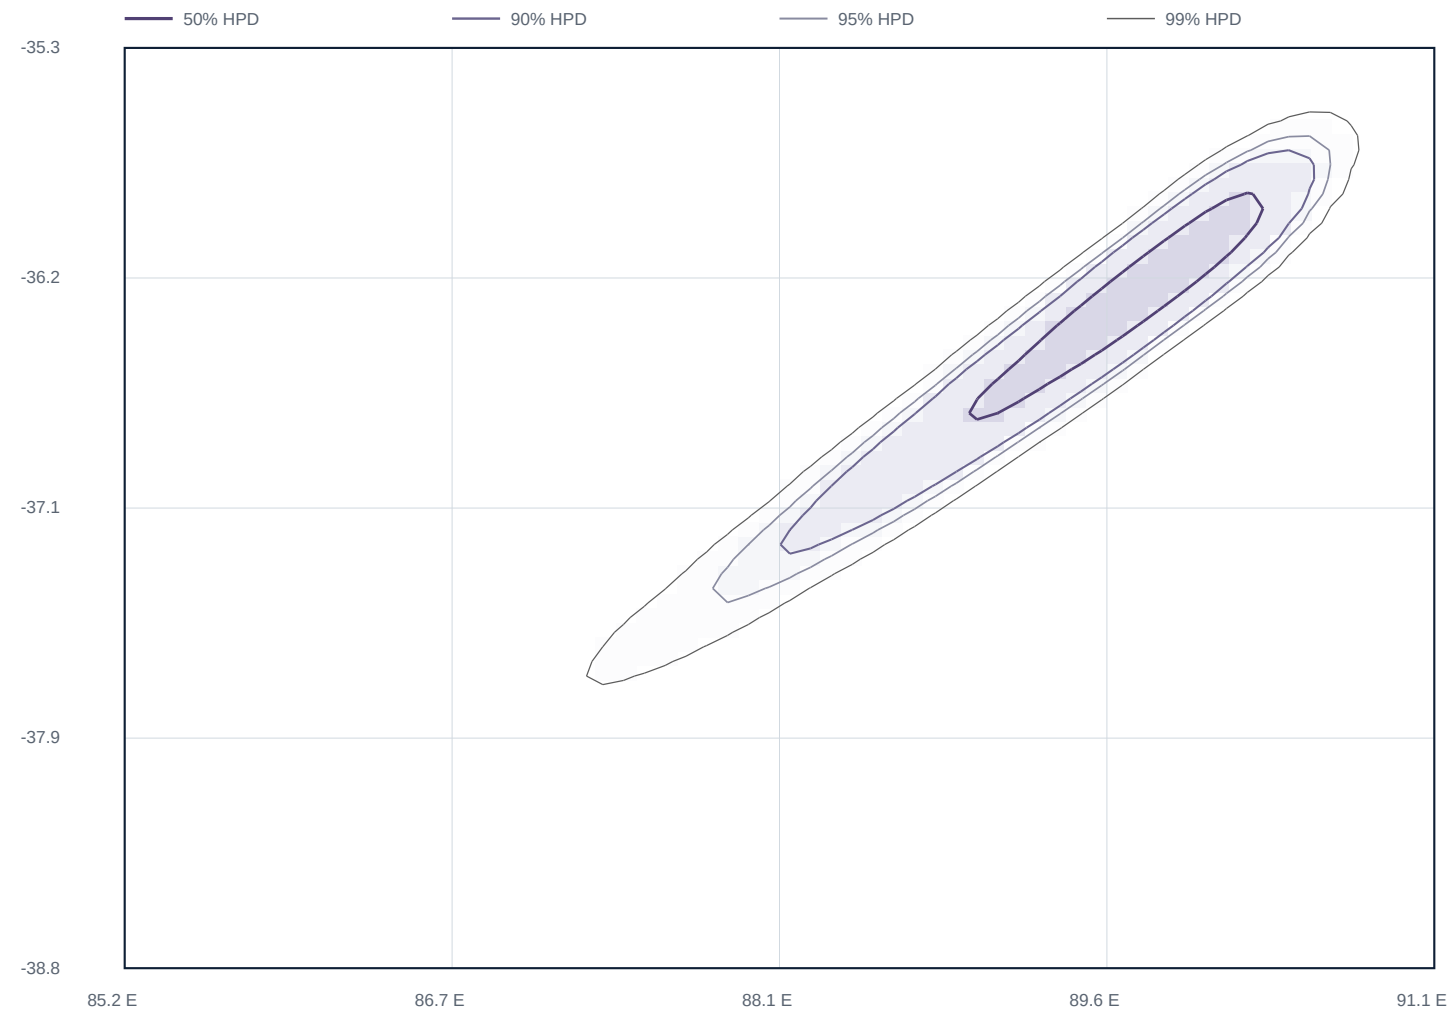


Probability is conditional on the named motion, SATCOM, and evidence configuration.
HPD contours use a fixed 5-cell display kernel; estimator weights and numerical summaries are unchanged.

Posterior geography

Highest-density regions are computed from the weighted particle population.

HPD contours use a fixed 5-cell display kernel; estimator weights and numerical summaries are unchanged.

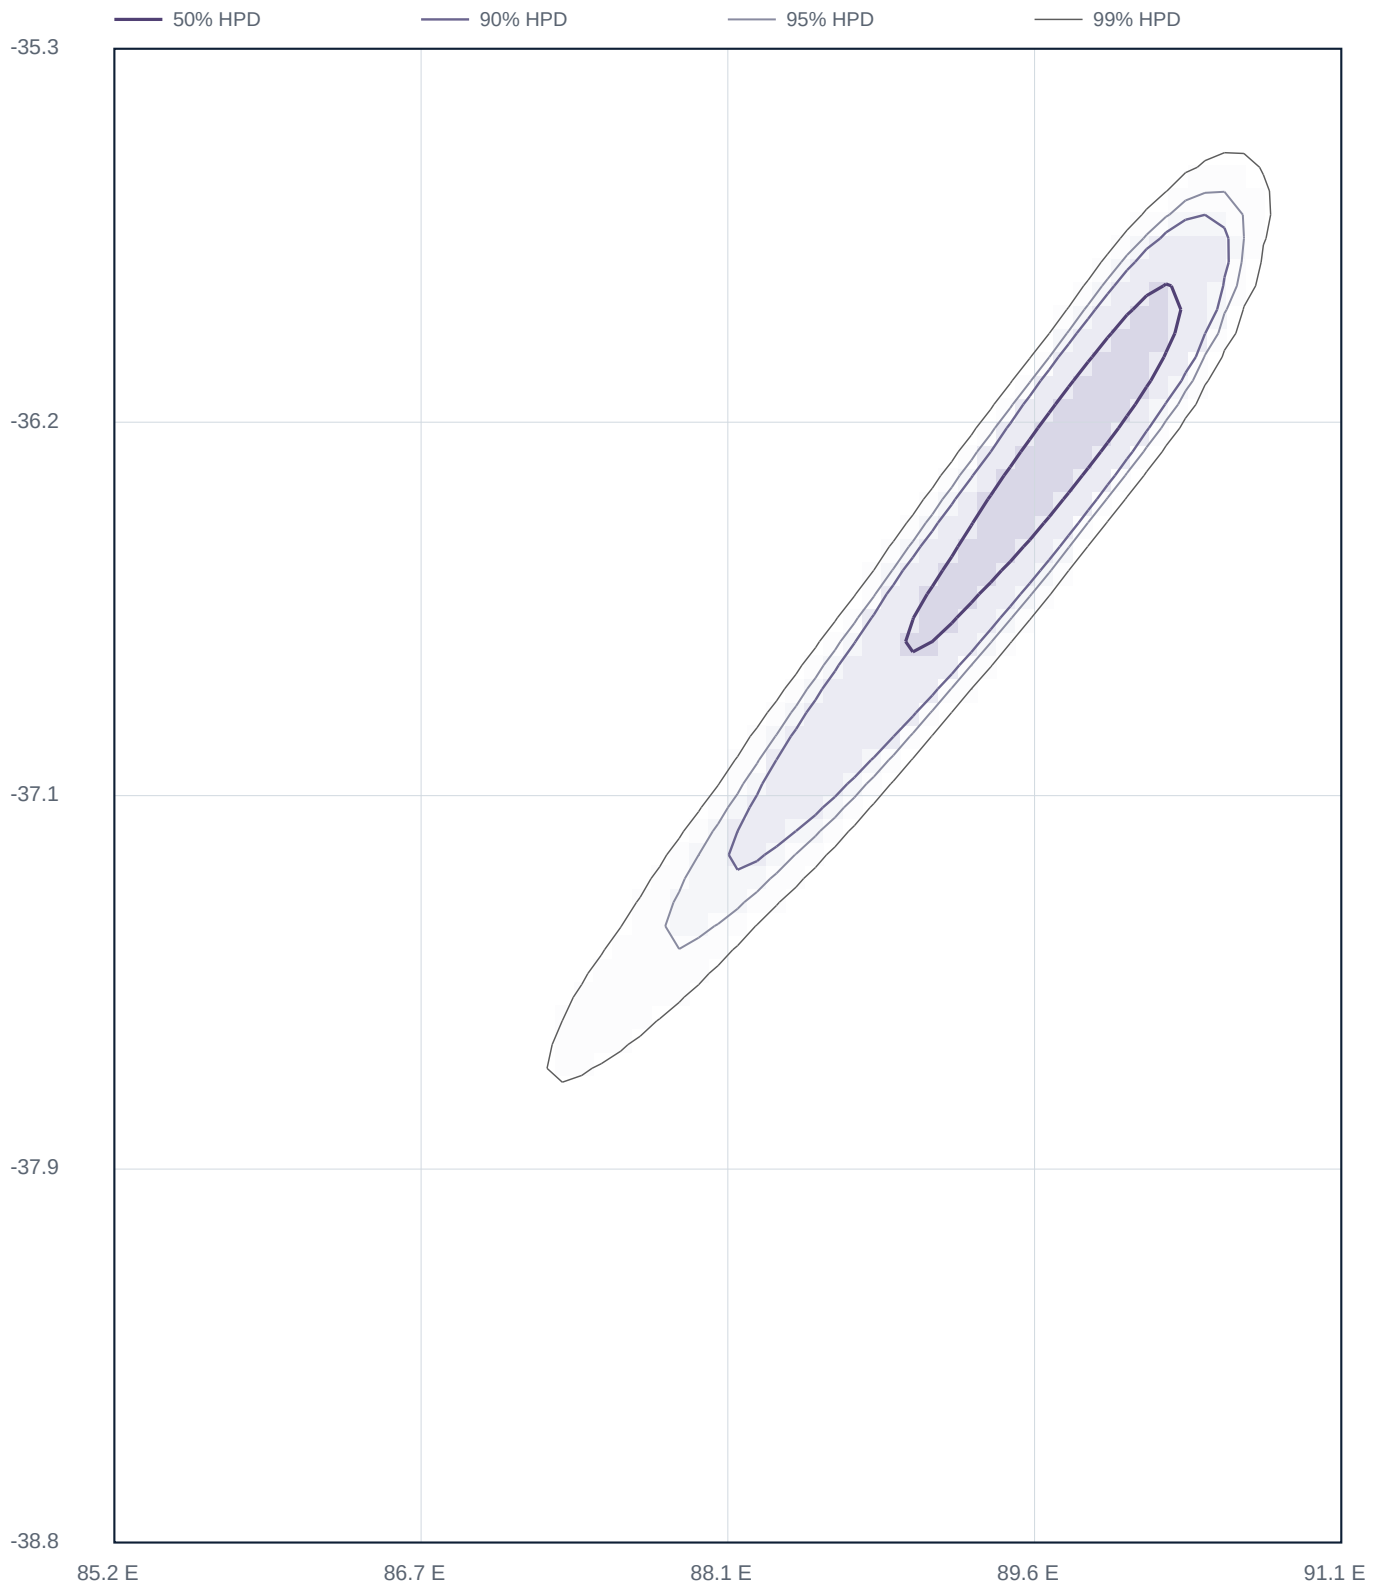


Interpretation

The map is a probability density over the modelled impact state. It is not a searched-area elimination map, and structural model alternatives must be compared separately.

Numerical behaviour and conditions

Adaptive likelihood tempering, particle diversity, and declared evidence conditions.

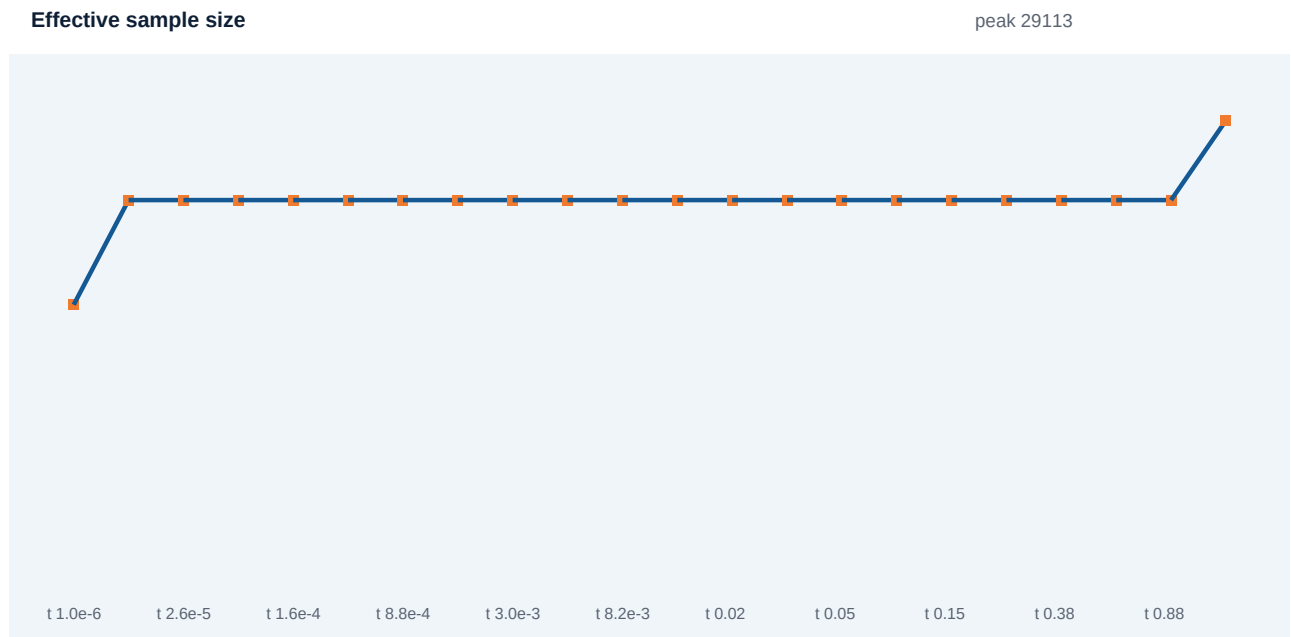

Evidence conditions

- Lateral model: constant true track; ERA5 temperature/wind active; IGRF-14 declination inactive for true-reference guidance.
- SATCOM family: BTO and BFO, BFO SD 4.000 Hz.
- End of flight: final SATCOM state; no displacement kernel applied.
- Cross-seed numerical convergence: passed.
- Directional received power is applied conditionally at five regular R1200 epochs; the gain surface and no-precompensation endpoint are uncommissioned.

Material limitations

- The numerical radar mean is reconstructed; its original covariance is unavailable.
- The trajectory assumes one instantaneous turn followed by constant true track, constant Mach, and constant altitude.
- ERA5 temperature/wind is active; IGRF-14 declination is inactive for this true-reference lateral guidance.
- Fuel state and the proprietary satellite correction series remain unavailable.
- The final two BFO values are excluded; end-of-flight displacement is a separately named conditional model.