


MH370 00:11 to 00:19 constant-true-track control

MH370 00:11 to corrected R600 BTO control | 5 typed source handoffs | BTO-only selection

Estimate at a glance

PARTICLES	POOLED NUMERICAL ESS
150000	135729
MINIMUM SEED ESS	ENDPOINT MEAN
26722	-37.455 deg, 89.373 deg E
90% LATITUDE	90% LONGITUDE
-38.12 to -36.97 deg	88.25 to 90.15 deg E
SOURCE MEAN SEPARATION	SELECTION
3.3 NM	2014-03-08T00:19:29.000Z BTO 18400 +/- 63 us

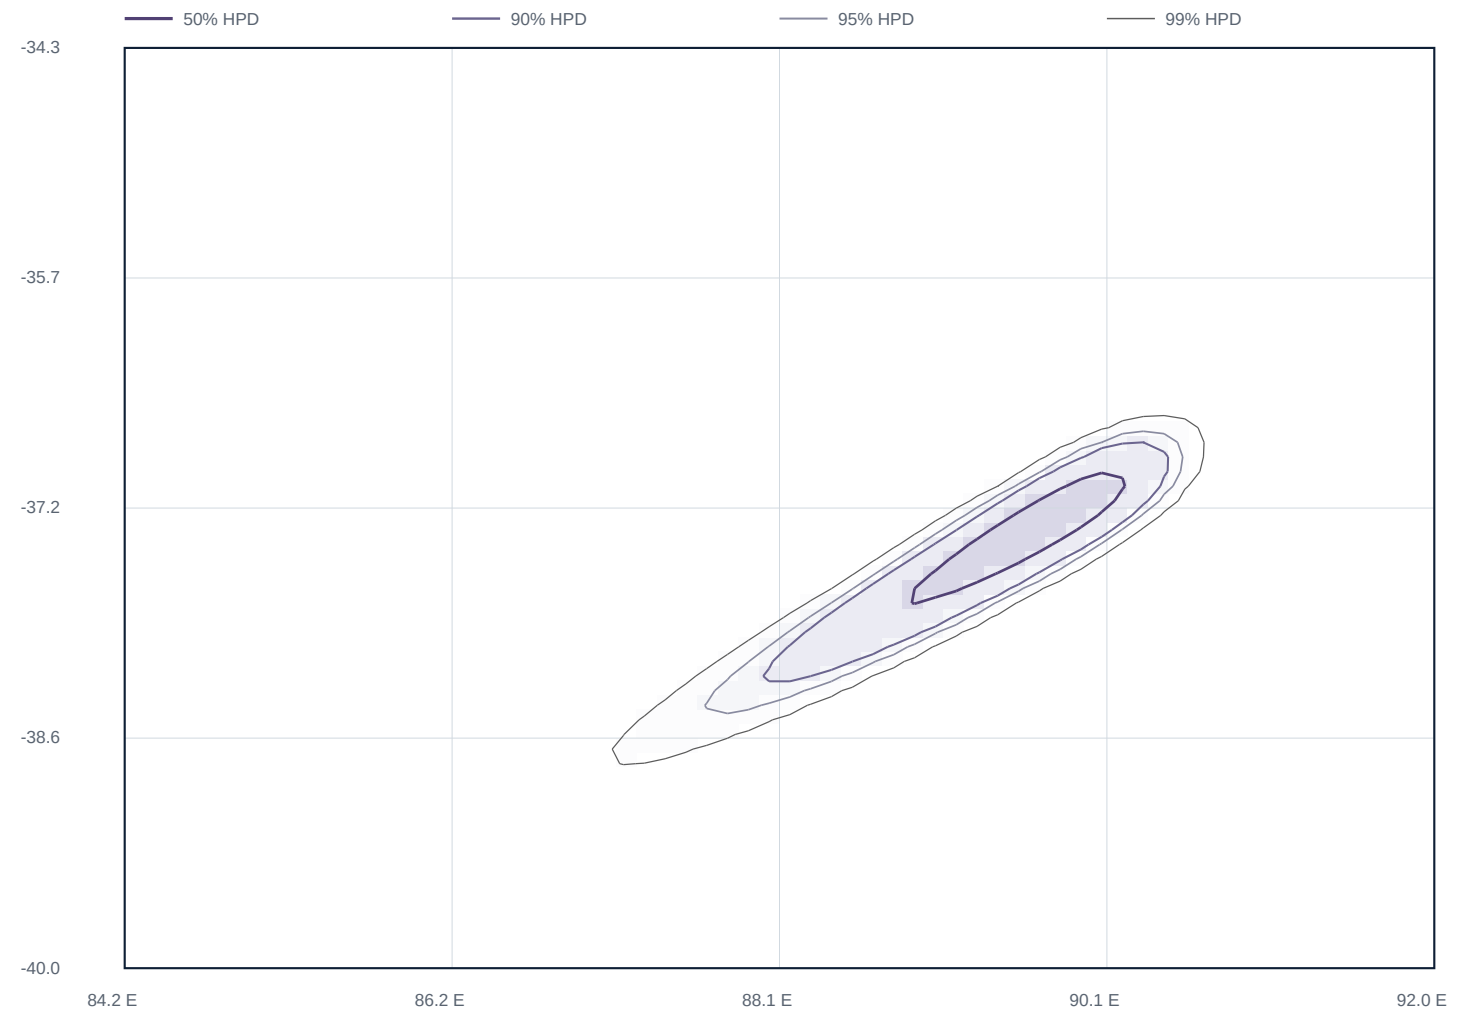


Probability is conditional on the named motion, SATCOM, and evidence configuration.
HPD contours use a fixed 5-cell display kernel; estimator weights and numerical summaries are unchanged.

Posterior geography

Highest-density regions are computed from the weighted particle population.

HPD contours use a fixed 5-cell display kernel; estimator weights and numerical summaries are unchanged.

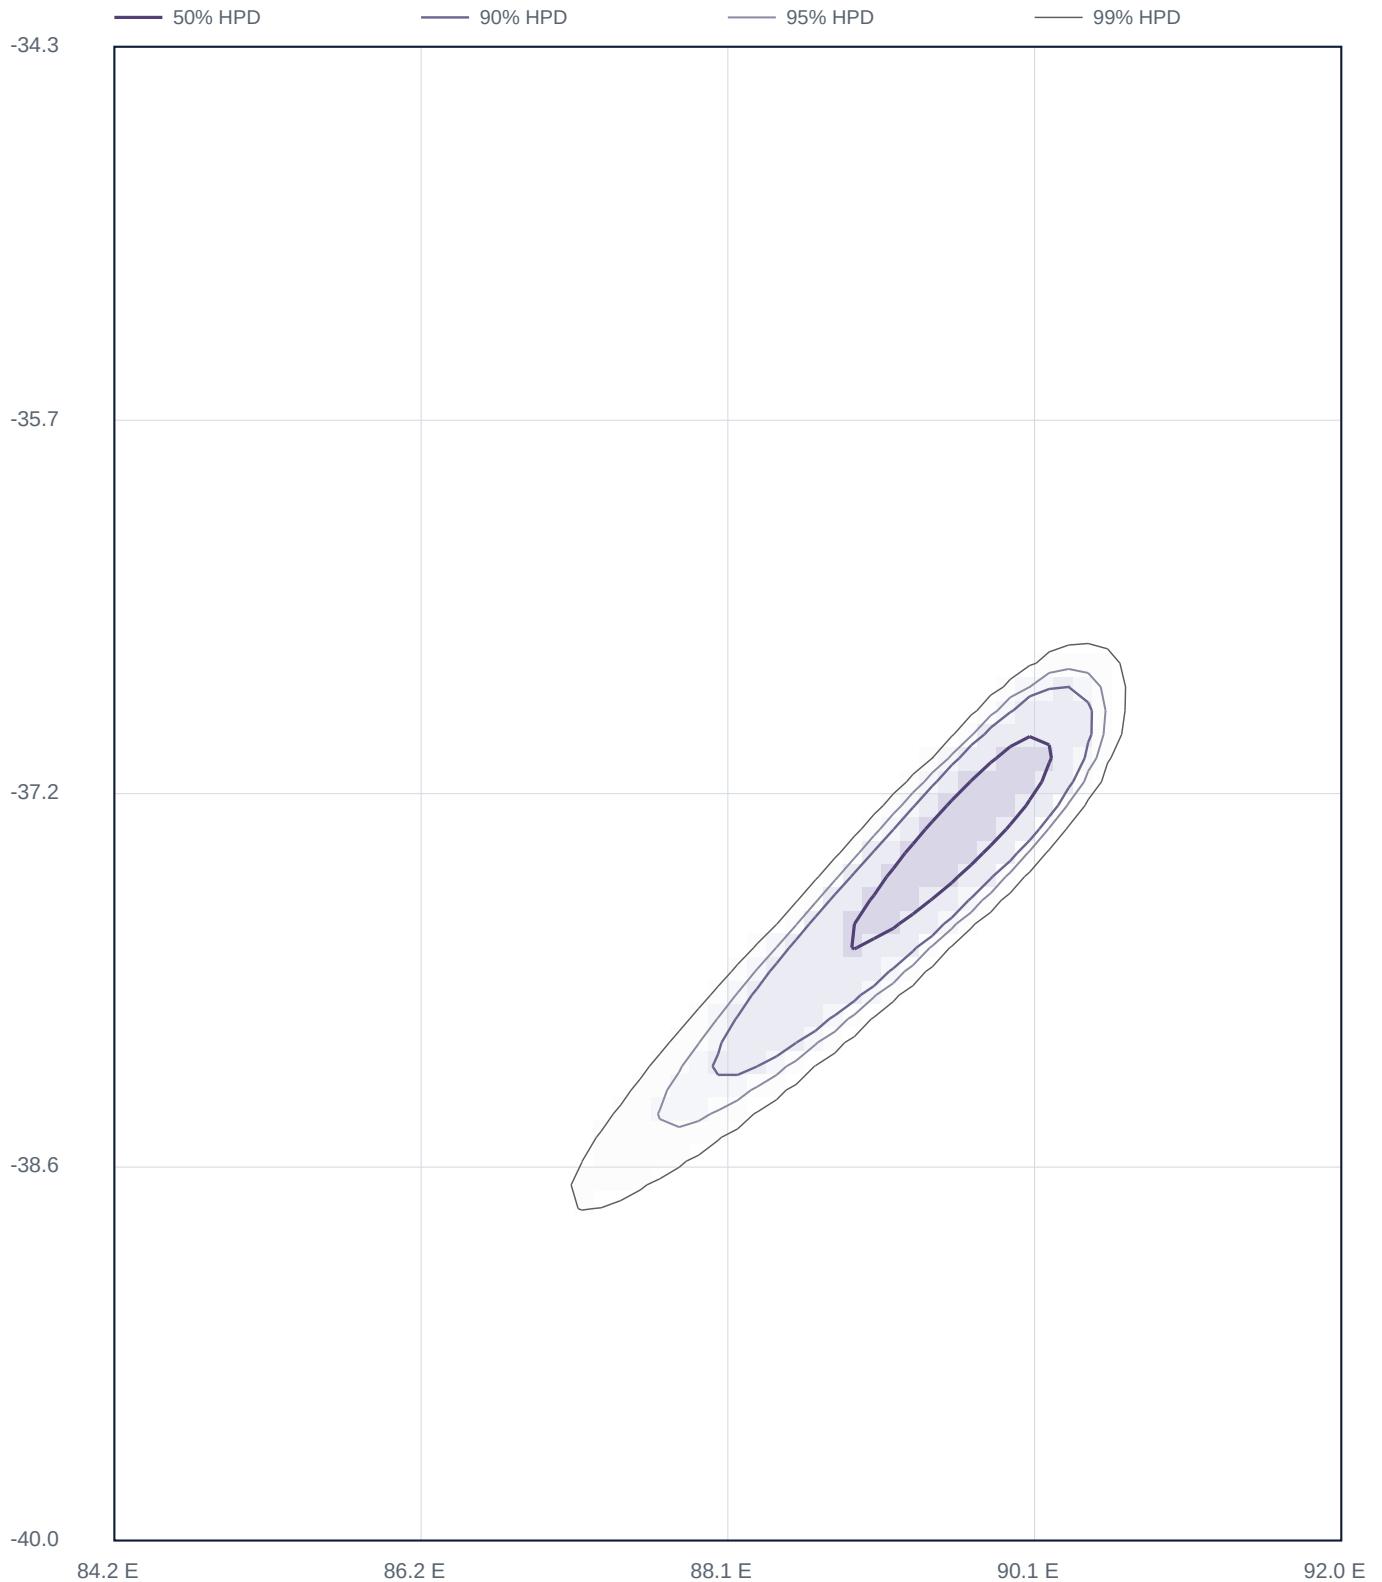

Interpretation

The map is a probability density over the modelled impact state. It is not a searched-area elimination map, and structural model alternatives must be compared separately.

Numerical behaviour and conditions

Adaptive likelihood tempering, particle diversity, and declared evidence conditions.

Effective sample size

peak 1



Evidence conditions

- 00:11 posterior propagated to 00:19:29; selection uses time and seventh-arc BTO distance only.

Material limitations

- The 00:19:29 R600 BTO is the only new selection observable.
- No 00:19 BFO, startup received power, end-of-flight displacement, drift, hydroacoustics, or antenna likelihood is applied.
- Control model: short continuation paths preserve each 00:11 particle's final constant true track, ground speed, and altitude.
- The interval is conditional on the one-turn and frozen-continuation model; it is not full MH370 path uncertainty.