




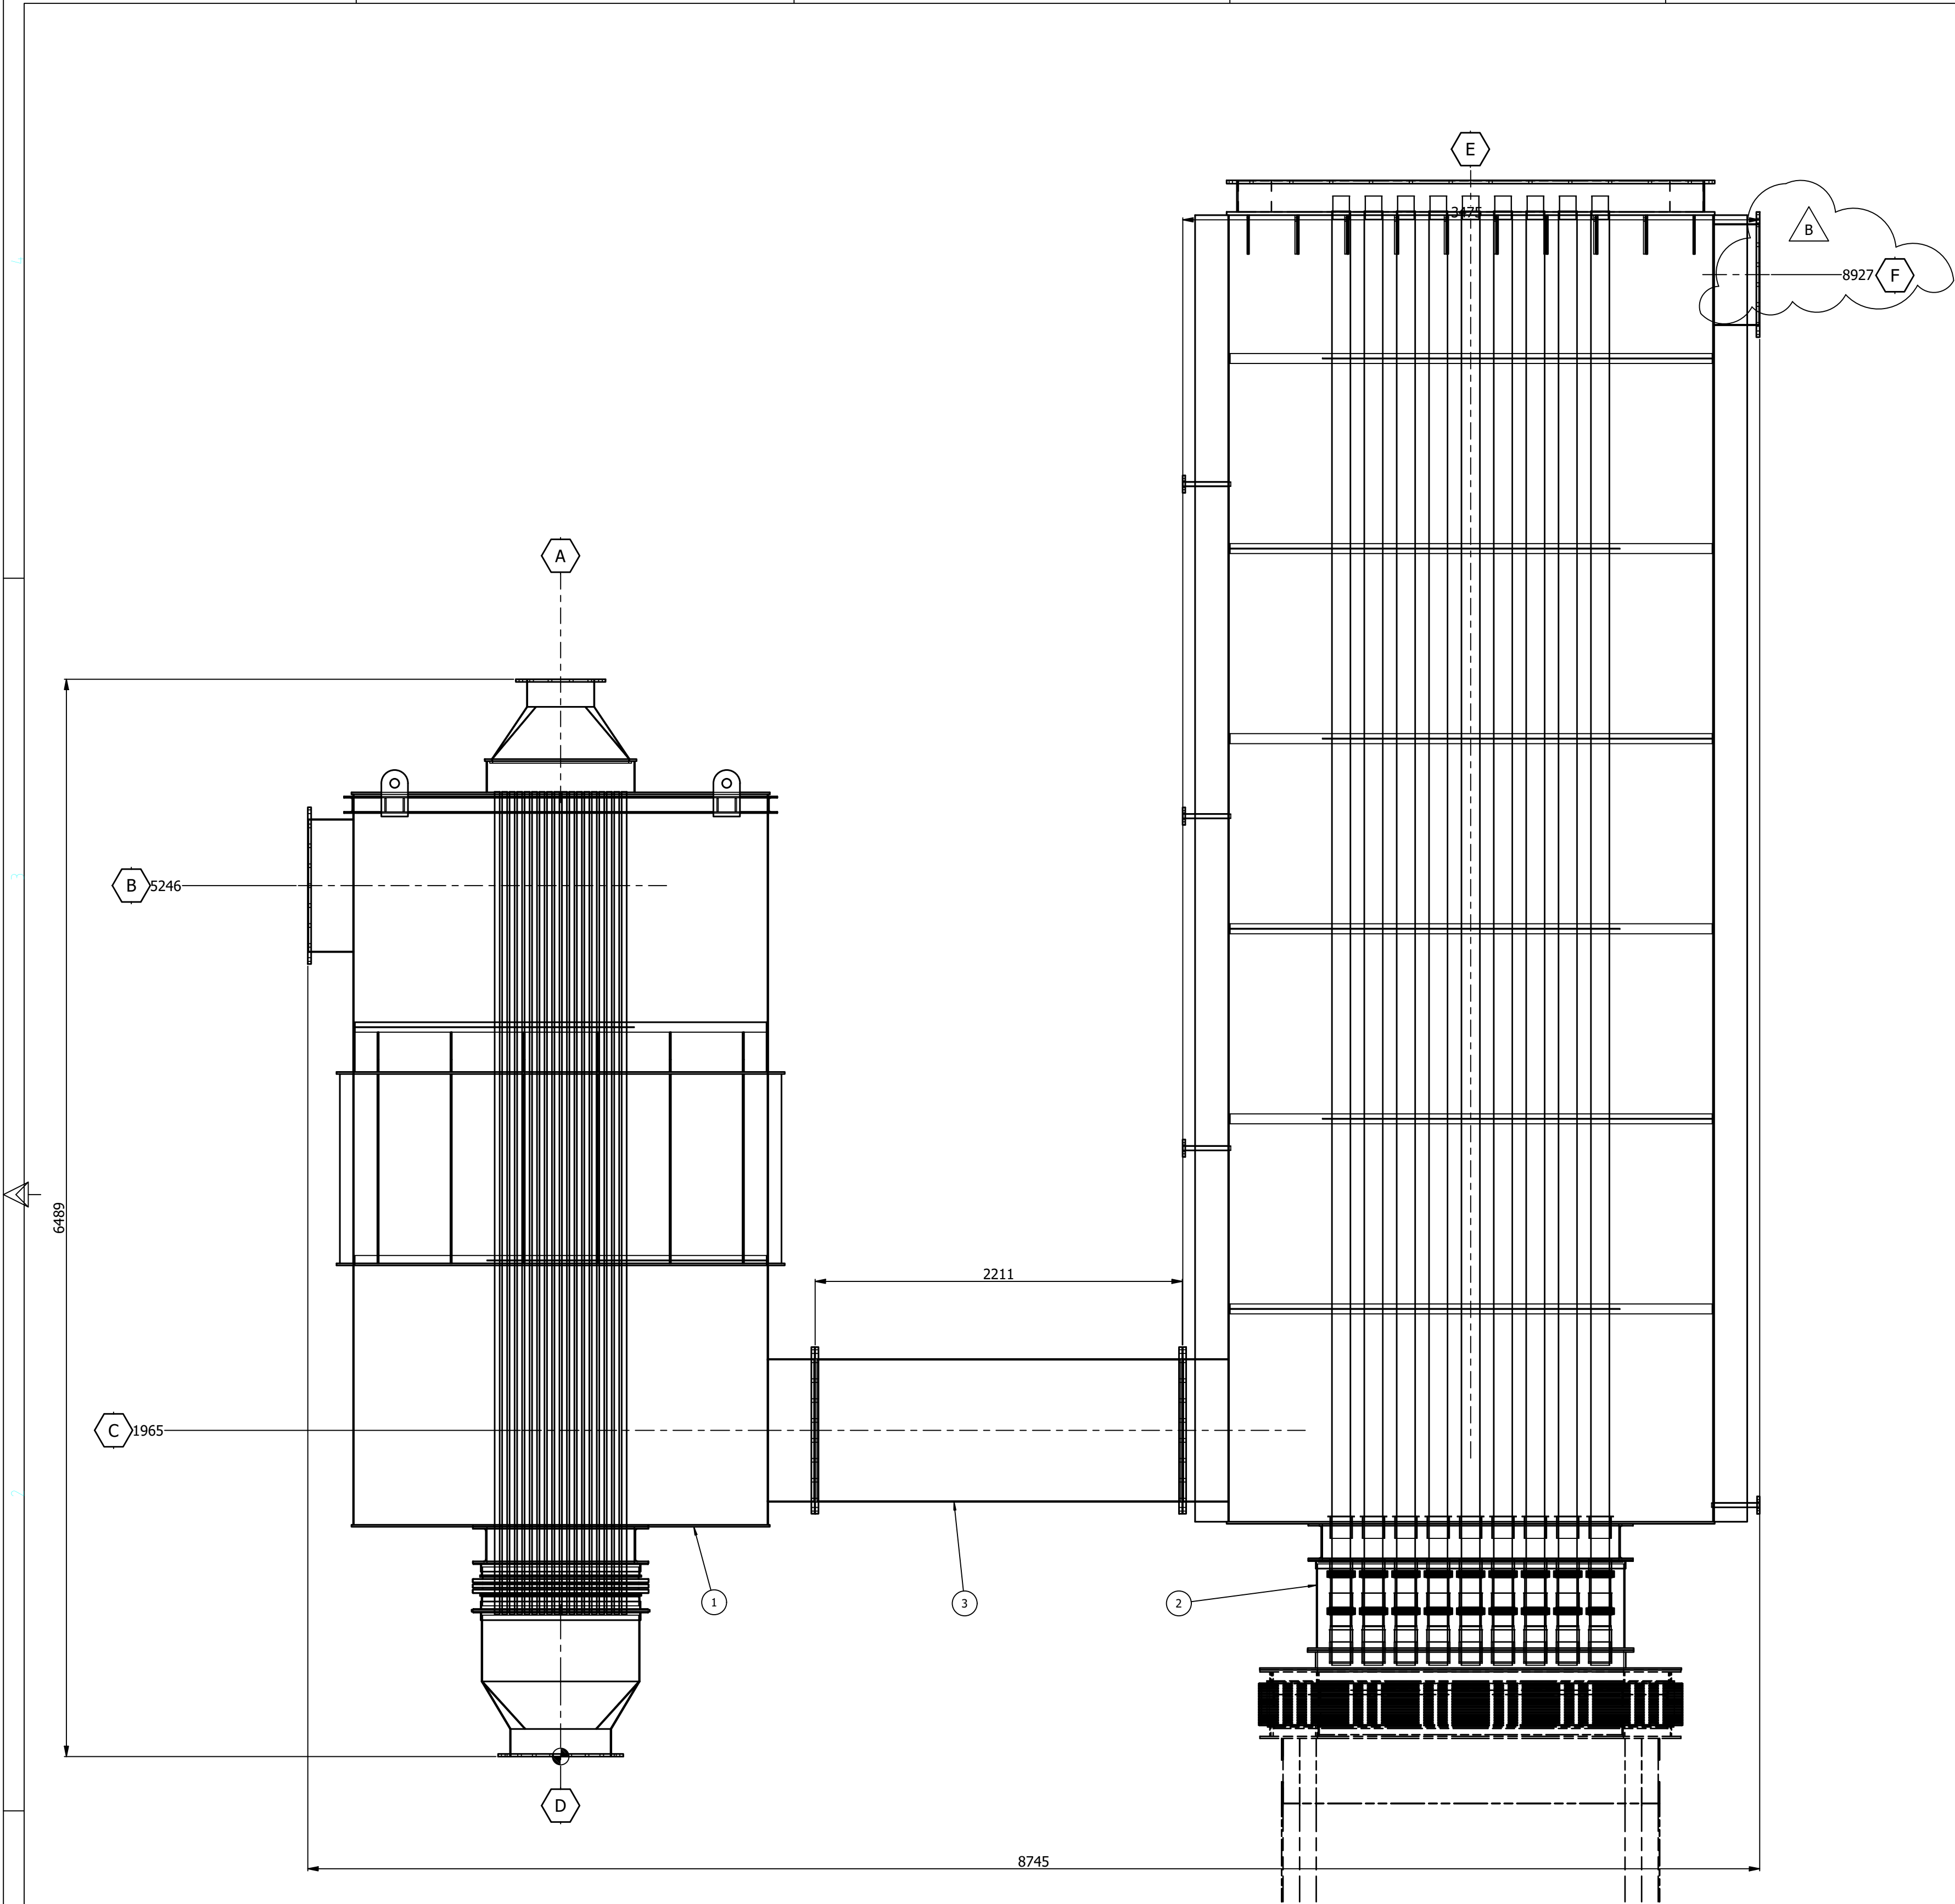


SIDE VIEW
ESCALA:(1 : 25)

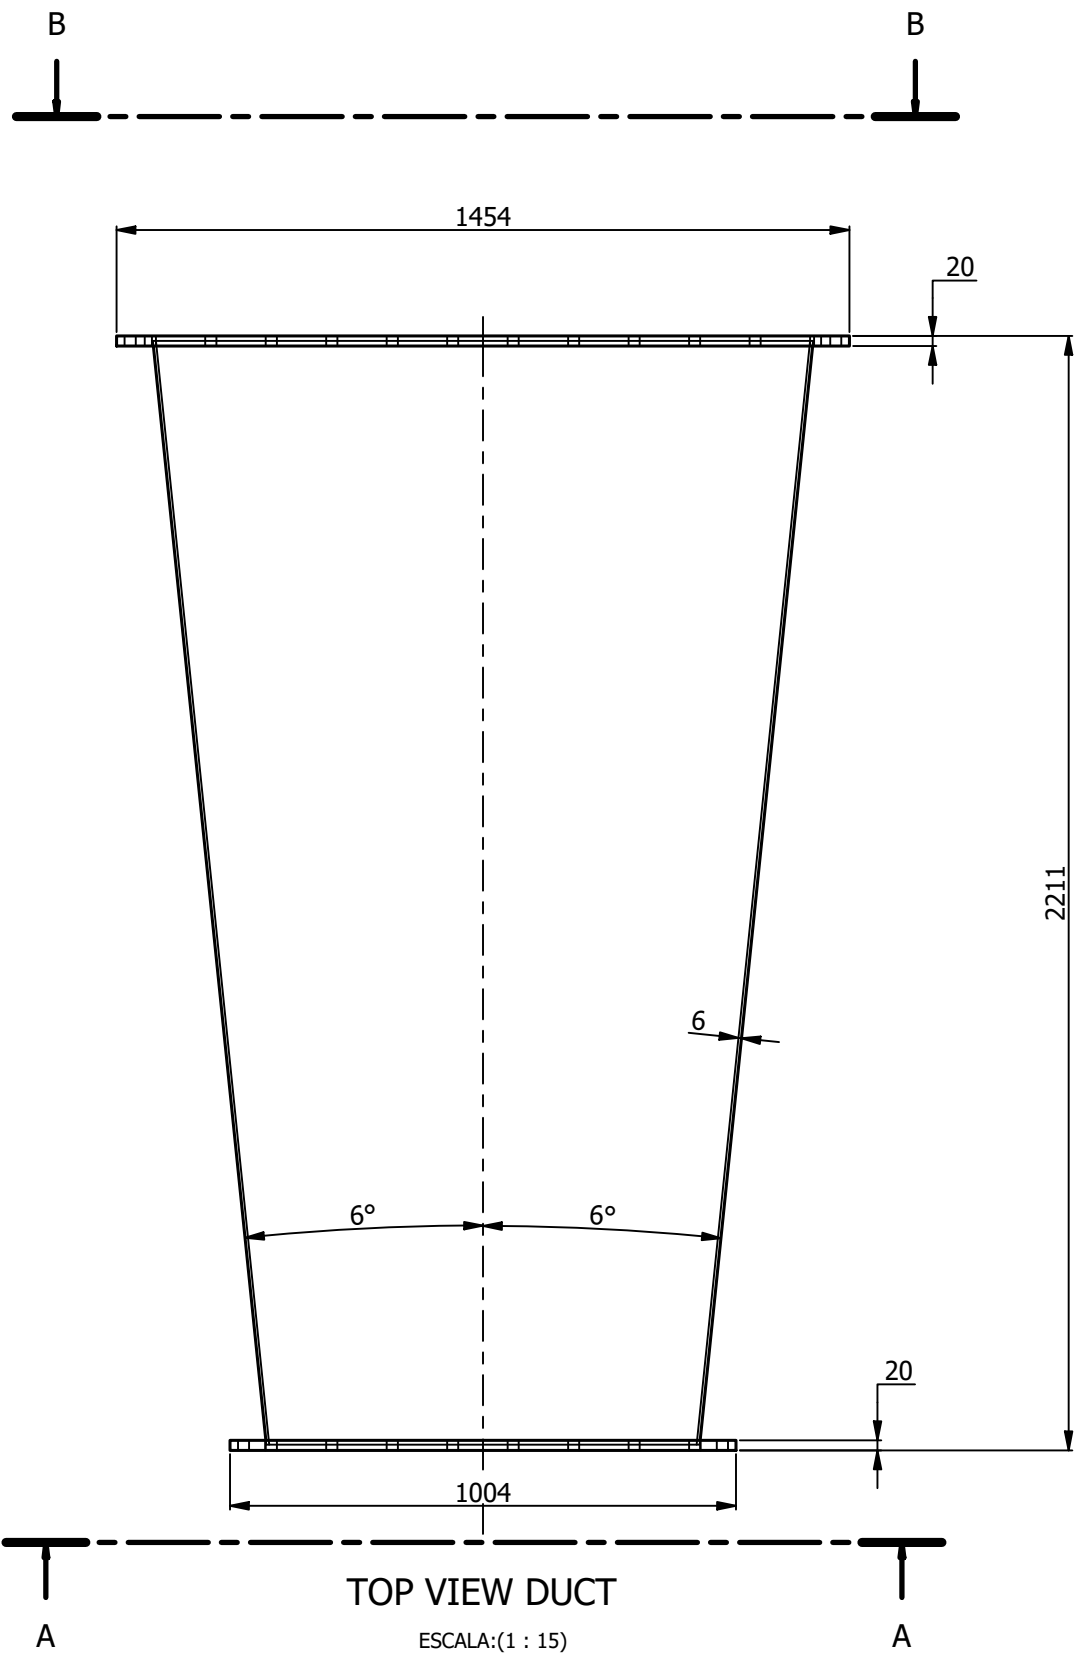

TOP VIEW DUCT
ESCALA:(1 : 15)

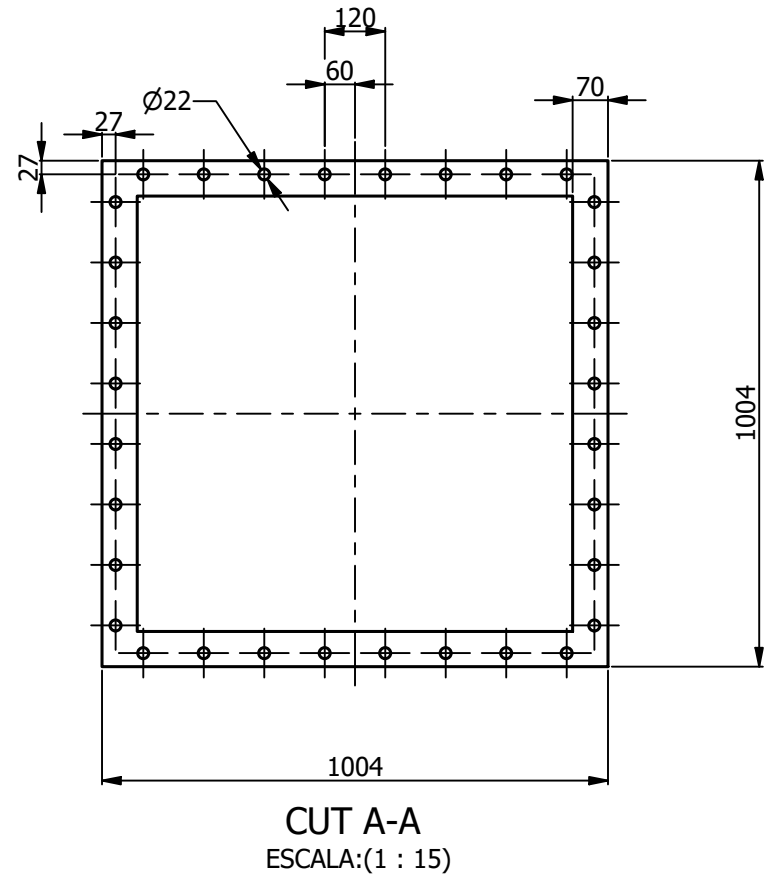

CUT A-A
ESCALA:(1 : 15)

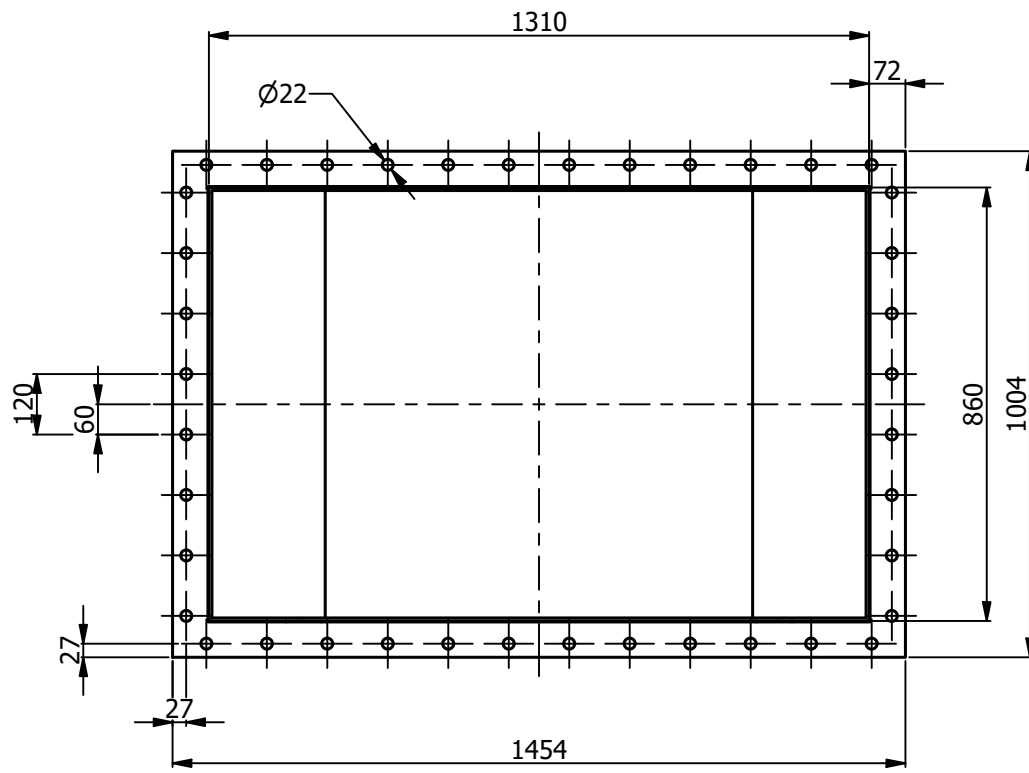


CUT B-B
ESCALA:(1 : 15)


NOTAS
1- ALL DIMENSIONS ARE INDICATED IN mm UNLESS OTHERWISE SPECIFIED.
2- THE DIMENSIONS GIVEN ON THE DRAWING ARE FOR REFERENCE ONLY.
3- CONNECTION FLANGES WILL BE ACCORDING TO THE APPLICABLE SPECIFICATION AND STANDARD, AND THEY WILL BE WELDED WITH BOLT HOLES STRADDLING THE MAIN AXES.
4- REMOVE ALL SHARP EDGES INSIDE AND OUTSIDE, ANY CONNECTION NECK WELDED FLUSH TO THE INTERIOR OF THE EQUIPMENT WILL HAVE ITS INNER EDGE ROUNDED.
5- NO VESSEL PENETRATION SHALL OVERLAP WITH A LONGITUDINAL OR CIRCUMFERENTIAL SEAM.
6- THIS DESIGN IS FOR QUOTATION PURPOSES ONLY AND IS SUBJECT TO CHANGES IN ITS FINAL VERSION.

3	SYNGAS HEATEXCHANGER E-811	1	
2	CONNECTION DUCT	1	
1	AIR HEATEXCHANGER E-812	1	
ITEM	DESCRIPCION	CANT.	OBSERVACION
LISTA DE MATERIALES			
TERMINACION:	HOLD		
INTERMEDIO:	-----		
BASE:	HOLD HOLD		
PREPARACION DE LA SUPERFICIE:	HOLD HOLD HOLD		
ESQUEMA DE PINTURA C3			


F	1	-	-	-	-	-	-	-	-	-	-	-
E	1	-	-	-	-	-	-	-	-	-	-	-
D	1	-	-	-	-	-	-	-	-	-	-	-
C	1	-	-	-	-	-	-	-	-	-	-	-
B	1	-	-	-	-	-	-	-	-	-	-	-
A	1	-	-	-	-	-	-	-	-	-	-	-
CONEXIÓN	CANTIDAD	DIÁMETRO	SERIE	TIPO	SCH	D.DATUM	AVANCE	ANG.	SERVICIO	SET	MATERIAL TUBE	MATERIAL FLANGE
CONNECTIONS												

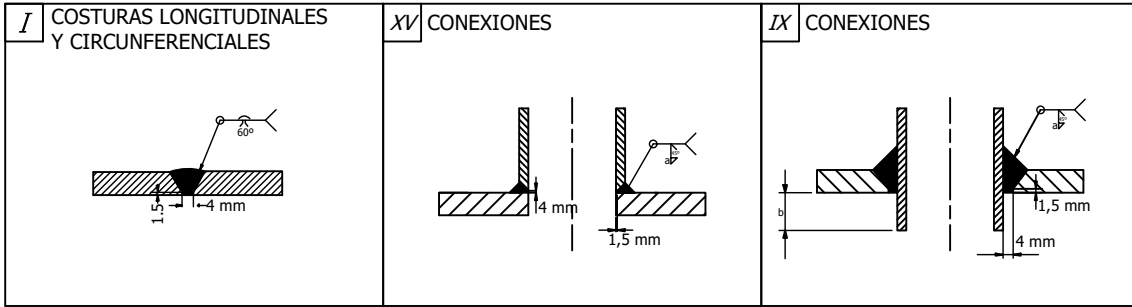


AIR HEAT EXCHANGER E-812

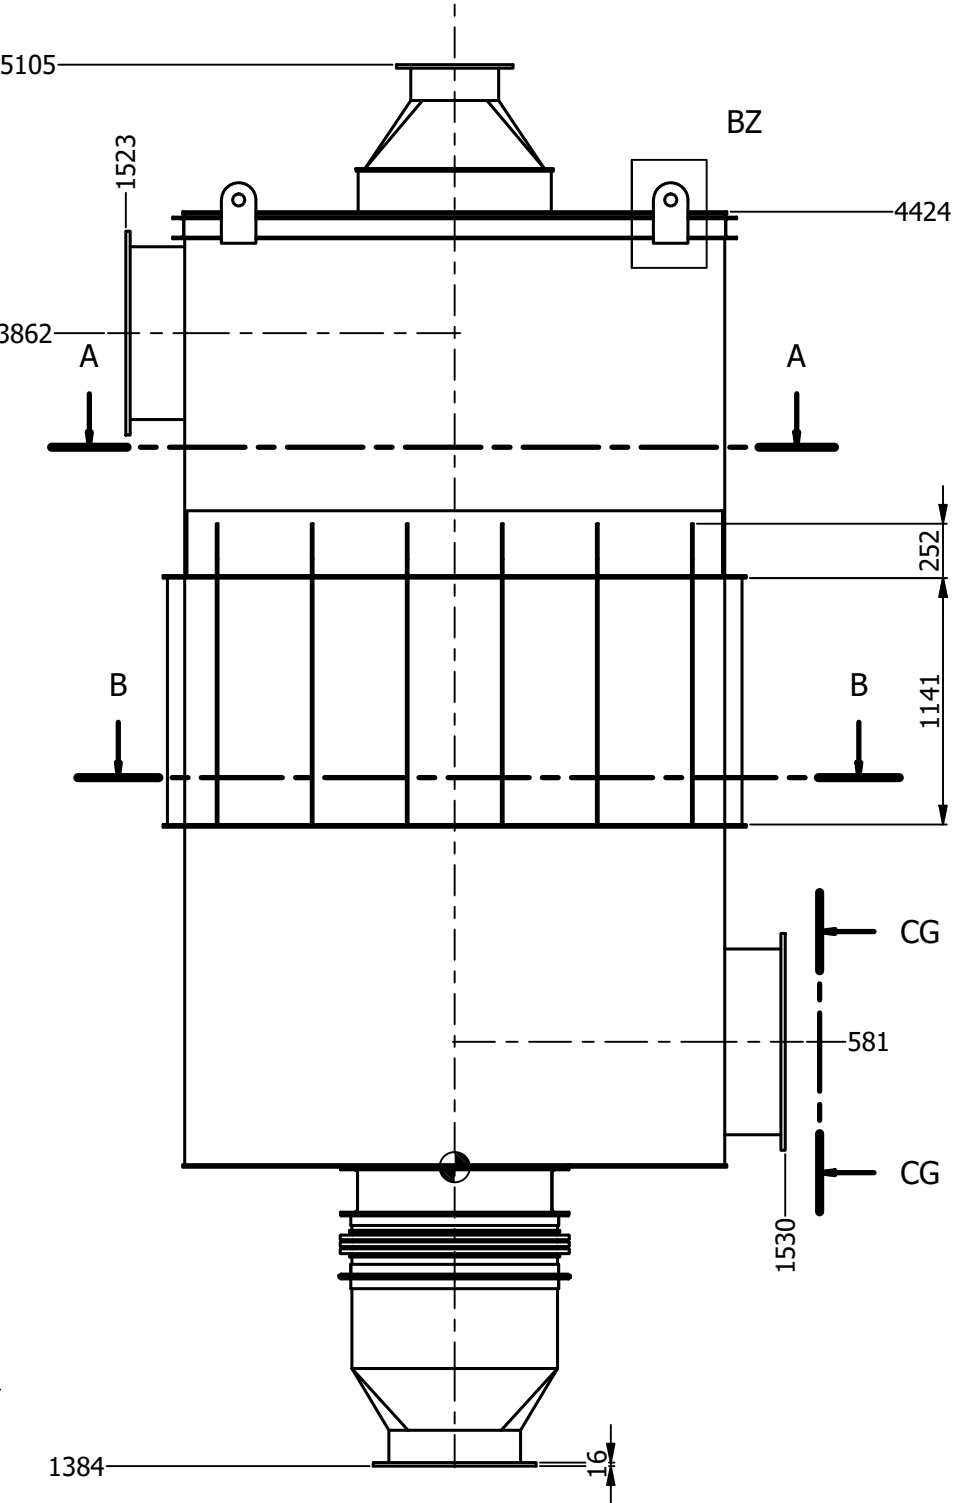


FRONT VIEW
ESCALA:(1 : 35)

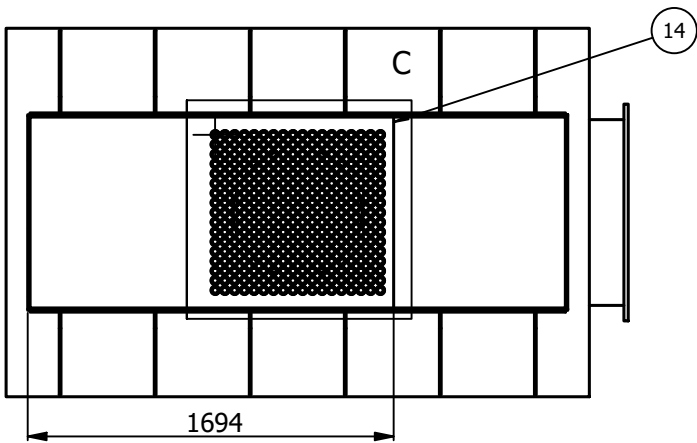


CUT A-A
ESCALA:(1 : 35)

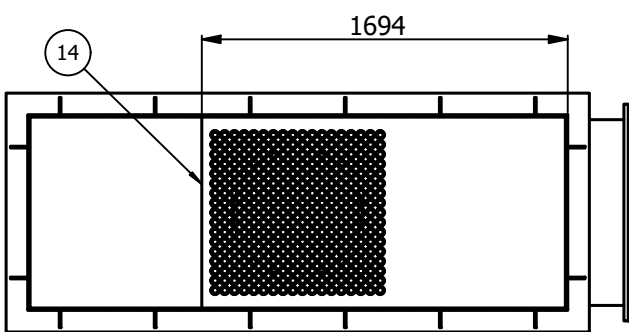


CUT B-B
ESCALA:(1 : 35)

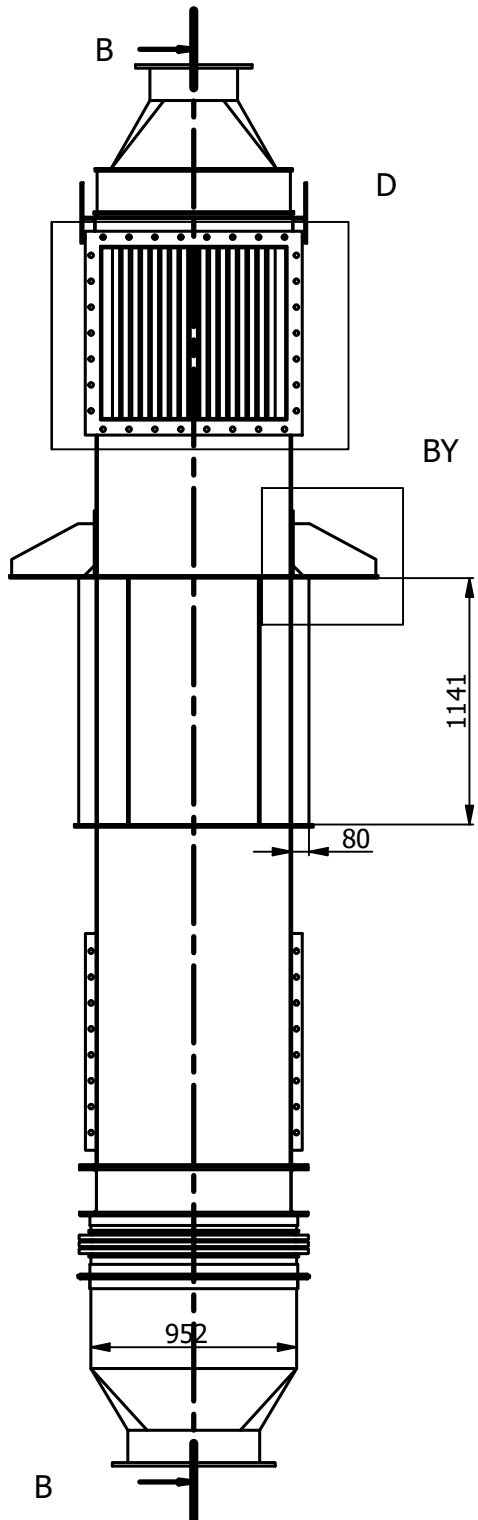


SIDE VIEW
ESCALA:(1 : 35)

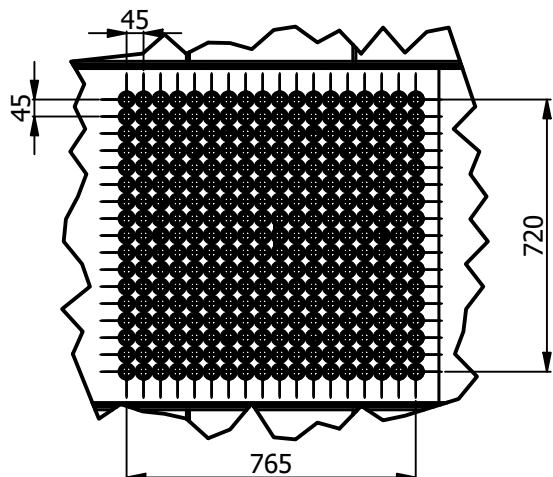


DETAIL C
ESCALA:(1 : 20)

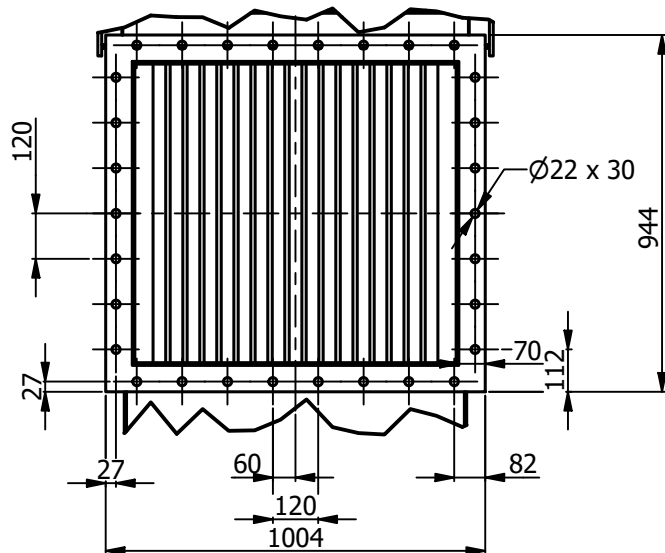


DETAIL D
ESCALA:(1 : 20)

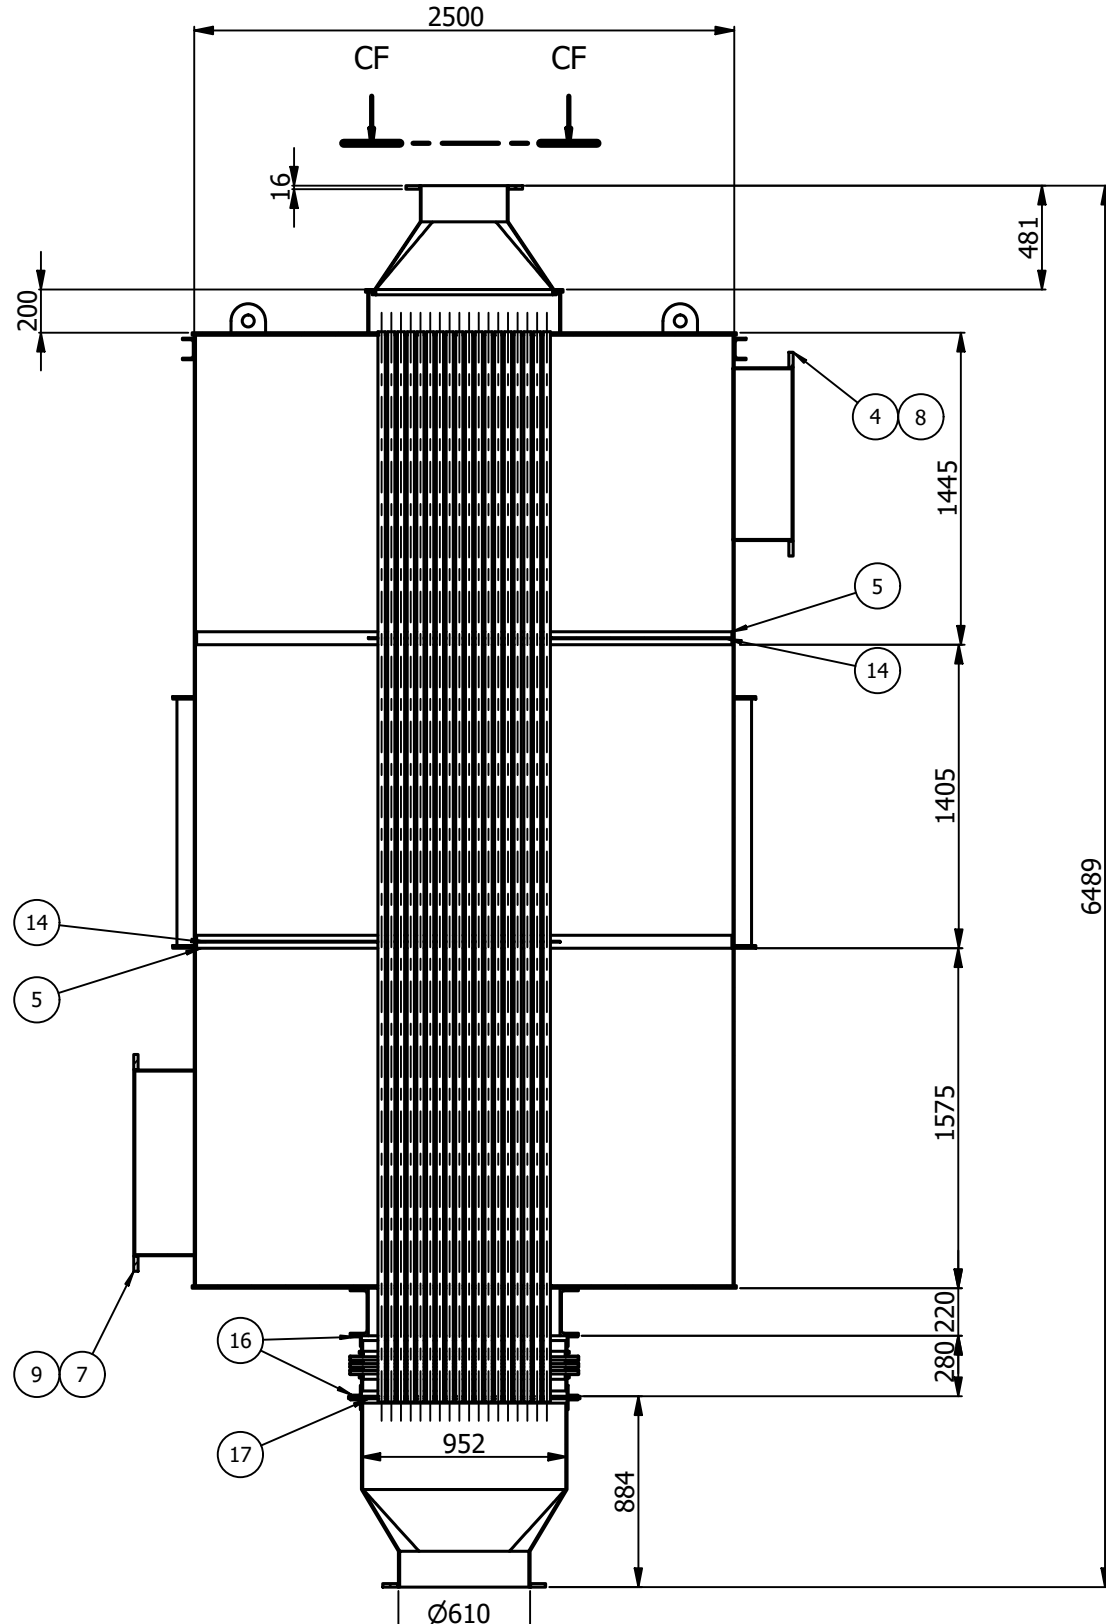


CUT B-B
ESCALA:(1 : 35)

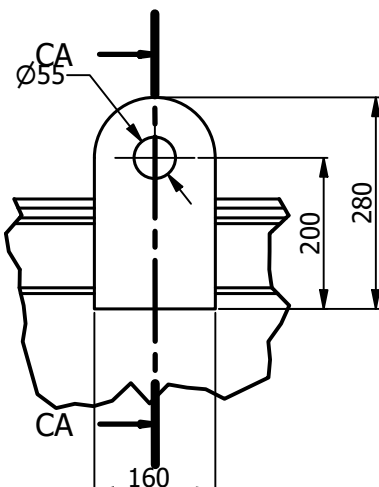


DETAIL BZ
ESCALA:(1 : 10)

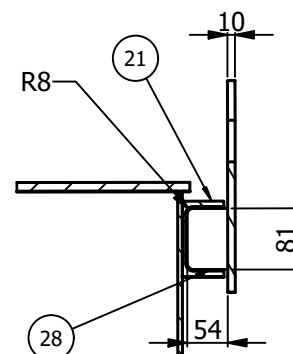


CUT CA-CA
ESCALA:(1 : 10)

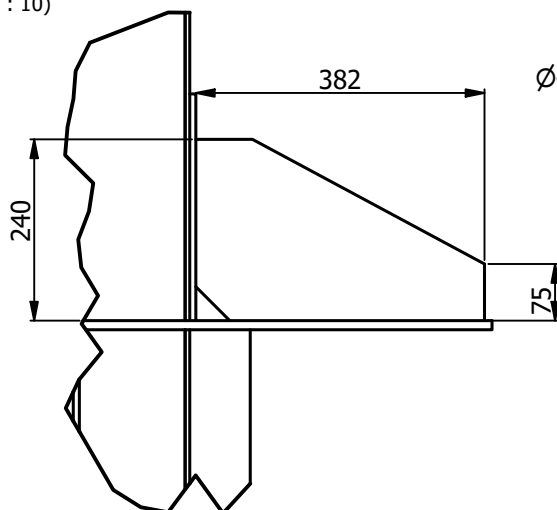


DETAIL BY
ESCALA:(1 : 10)

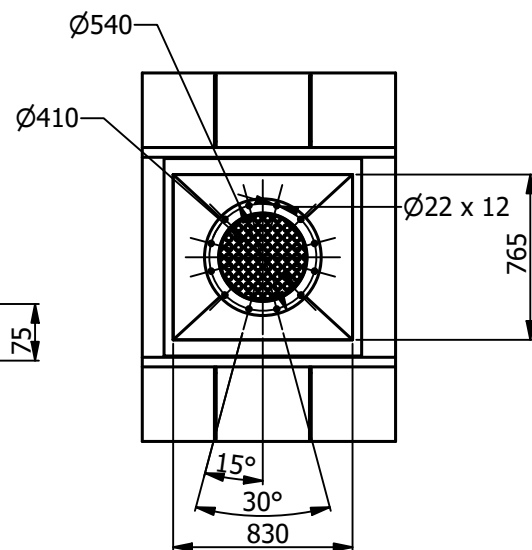

DETAIL CF
ESCALA:(1 : 35)

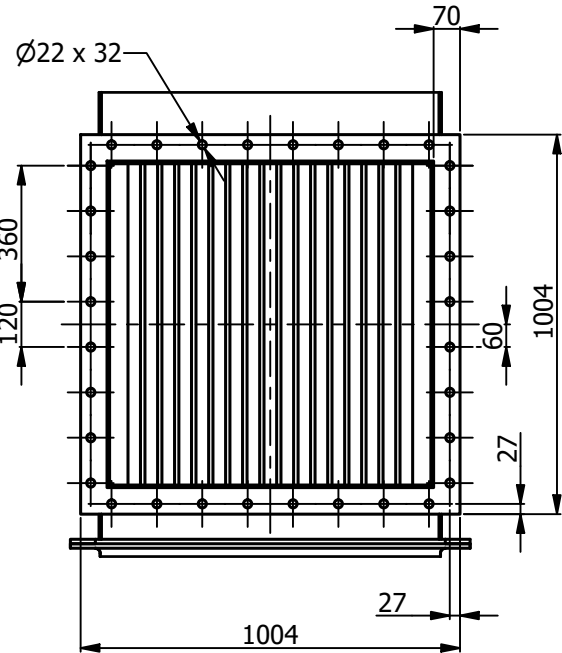

DETAIL CG
ESCALA:(1 : 20)

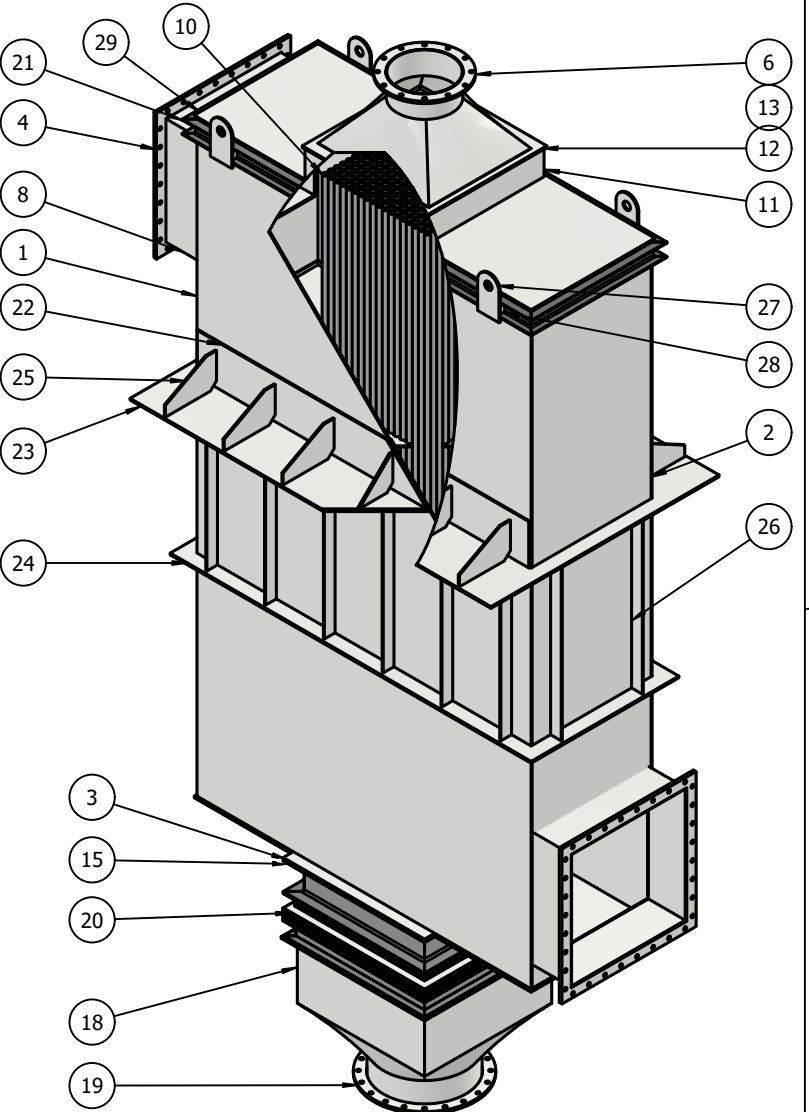

ISOMETRIC VIEW
ESCALA:(1 : 40)


APPROXIMATE WEIGHT:7000 KG

29	PLATE 2520 x 926 x 6 tkns	1	192,715 kg	C.S EN 1.0036 S 235 JR
28	LIFTING EAR REINFORCEMENT	8	0,596 lbmass	C.S EN 1.0036 S 235 JR
27	EAR LIFT 10 mm tkns	4	3,115 kg	C.S EN 1.0036 S 235 JR
26	LATERAL REINFORCEMENT PLATE 1141 x 80 * 8	16	5,732 kg	C.S EN 1.0036 S 235 JR
25	LEG REINFORCEMENT THICKNESS 8 mm	12	4,103 kg	C.S EN 1.0036 S 235 JR
24	REINFORCEMENT 100 * 12 mm	1	67,937 kg	C.S EN 1.0036 S 235 JR
23	REINFORCEMENT RING FOR LEGS 12 mm THICKNESS	1	220,541 kg	C.S EN 1.0036 S 235 JR
22	REINFORCEMENT PLATE 2480 x 300 x 8 mm THICKNESS	2	46,723 kg	C.S EN 1.0036 S 235 JR
21	DIN 1026-2 - UPE 100	7252,00	0 mm	C.S EN 1.0036 S 235 JR
20	FLEXIBLE JOINT	1	75,154 kg	C.S EN 1.0036 S 235 JR
19	LOWER FLAT FLANGE	1	17,938 kg	C.S EN 1.0036 S 235 JR
18	FOLDED CONICAL LOWER SHEET THICKNESS = 6 mm	1	133,655 kg	C.S EN 1.0036 S 235 JR
17	PERFORATED PLATE 1072 * 1072 * 12	1	81,142 kg	C.S EN 1.0036 S 235 JR
16	ANGLE STEEL DIN 59370 - 50 x 5	12628,8	00 mm	C.S EN 1.0036 S 235 JR
15	DIN 1026-2 - UPE 220	4229,60	0 mm	C.S EN 1.0036 S 235 JR
14	INTERNAL PERFORATED PLATE THICKNESS 5 mm	2	43,302 kg	C.S EN 1.0036 S 235 JR
13	FOLDED CONICAL SHEET THICKNESS = 4 mm	1	39,916 kg	C.S EN 1.0036 S 235 JR
12	PLATE 495 x 495 x 12	1	18,951 kg	C.S EN 1.0036 S 235 JR
11	UPPER RECTANGULAR FLANGE	1	31,466 kg	C.S EN 1.0036 S 235 JR
10	CAÑO S/C NPS 1 SCH40	1516,54	m	C.S EN 1.0036 S 235 JR
9	LOWER RECTANGULAR DUCT THICKNESS 6 mm	1	37,720 kg	C.S EN 1.0036 S 235 JR
8	UPPER RECTANGULAR DUCT THICKNESS 6 mm	1	35,490 kg	C.S EN 1.0036 S 235 JR
7	RECTANGULAR FLANGE 2	1	39,149 kg	C.S EN 1.0036 S 235 JR
6	TOP FLANGE	1	11,610 kg	C.S EN 1.0036 S 235 JR
5	RECTANGULAR PLATE	2	15,882 kg	C.S EN 1.0036 S 235 JR
4	RECTANGULAR FLANGE	1	37,954 kg	C.S EN 1.0036 S 235 JR
3	PLATE 2520 x 1058 x 6 tkns	1	196,683 kg	C.S EN 1.0036 S 235 JR
2	PLATE 4400 x 894 x 6 tkns	2	185,273 kg	C.S EN 1.0036 S 235 JR
1	PLATE 4400 * 2500 * 6 tkns	2	518,100 kg	C.S EN 1.0036 S 235 JR

ITEM	DESCRIPCION	CANT.	MASS	MATERIAL
------	-------------	-------	------	----------


BILL OF MATERIALS

SYNGAS HEAT EXCHANGER E-811

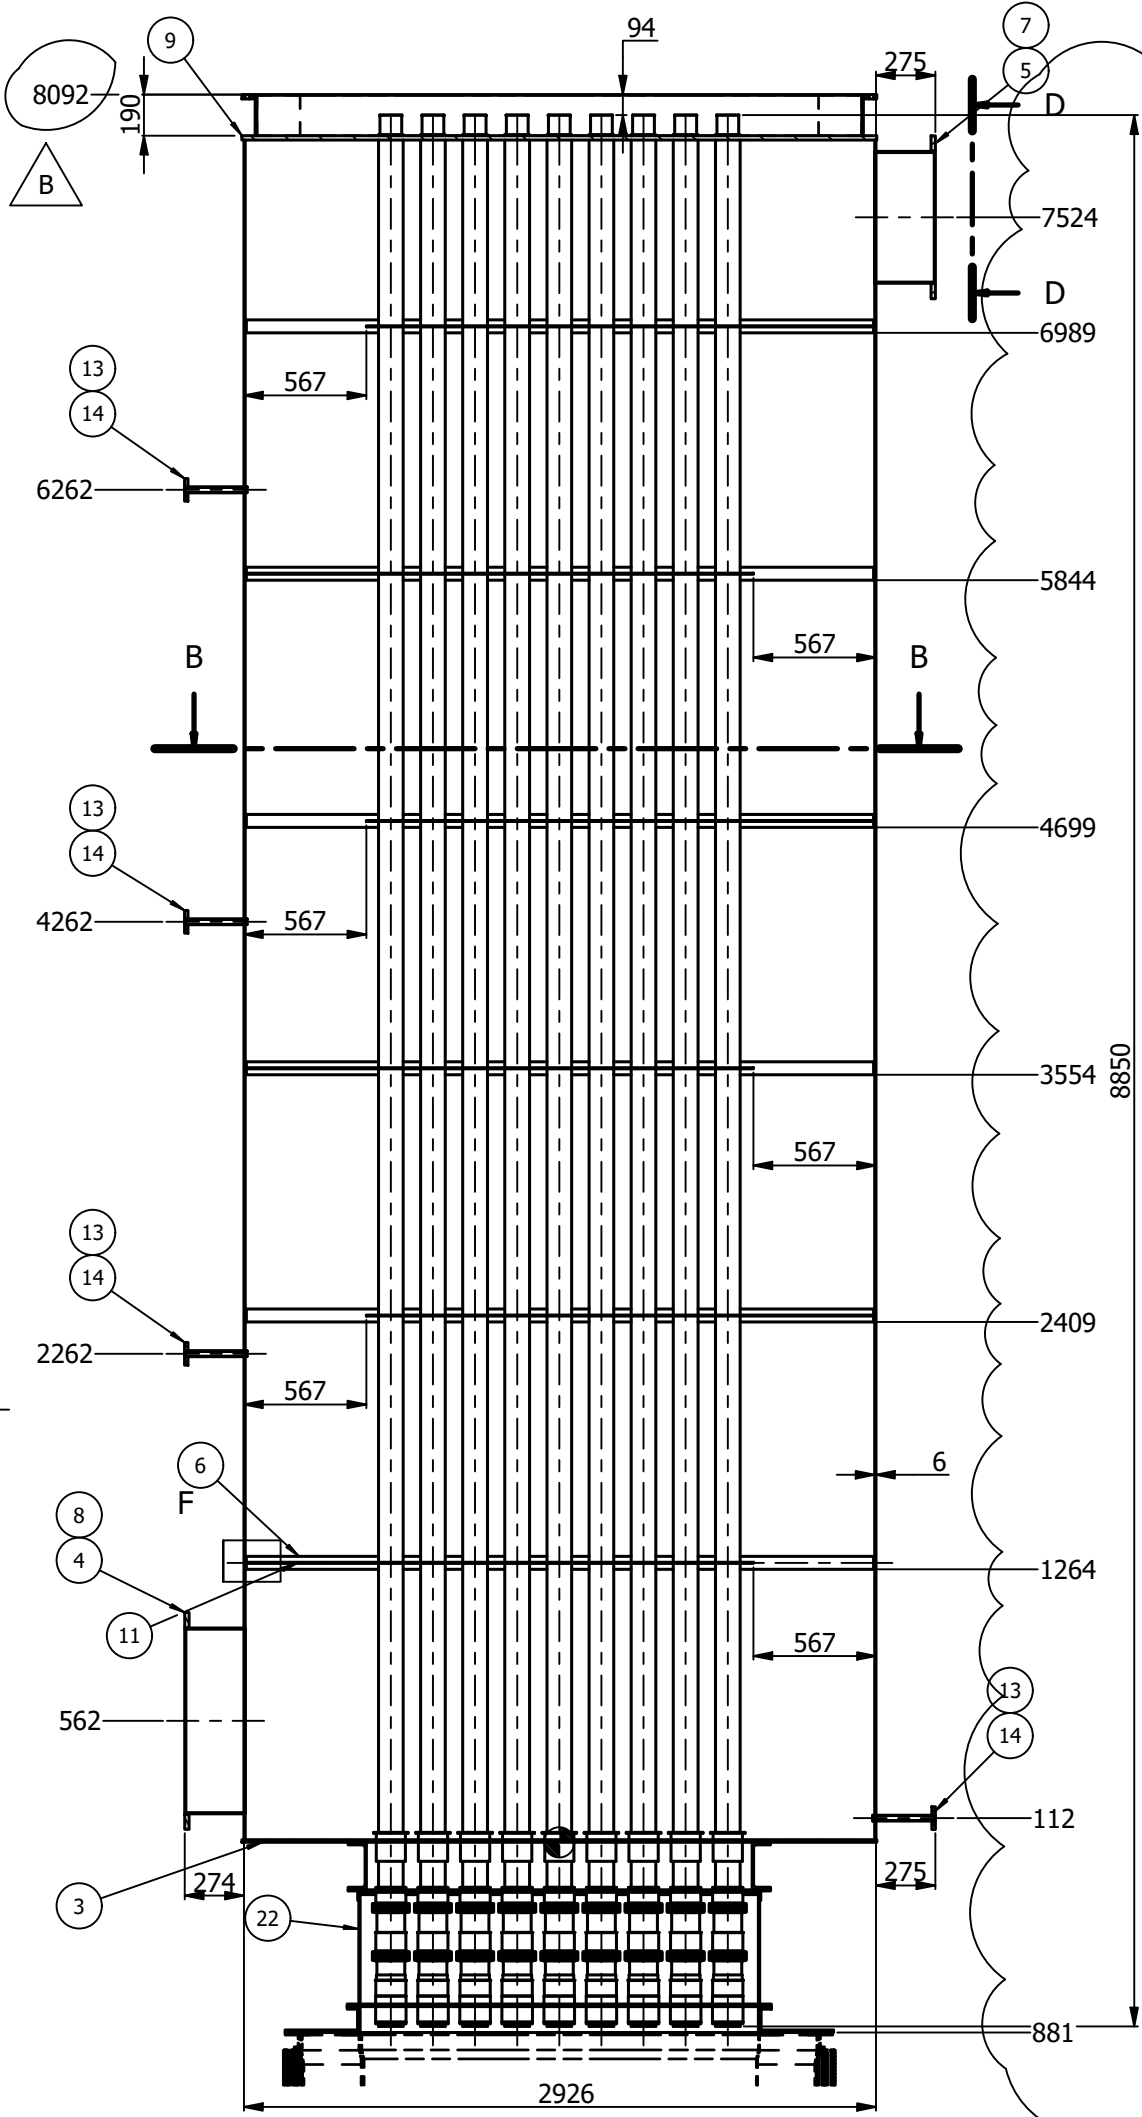


CUT A-A

ESCALA:(1 : 35)

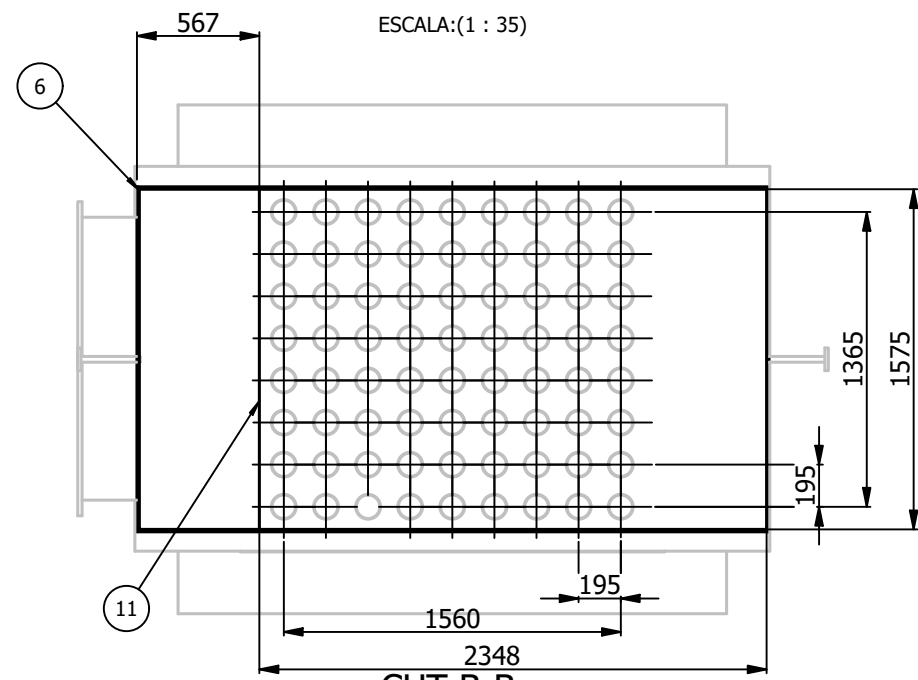


CUT B-B

ESCALA:(1 : 35)

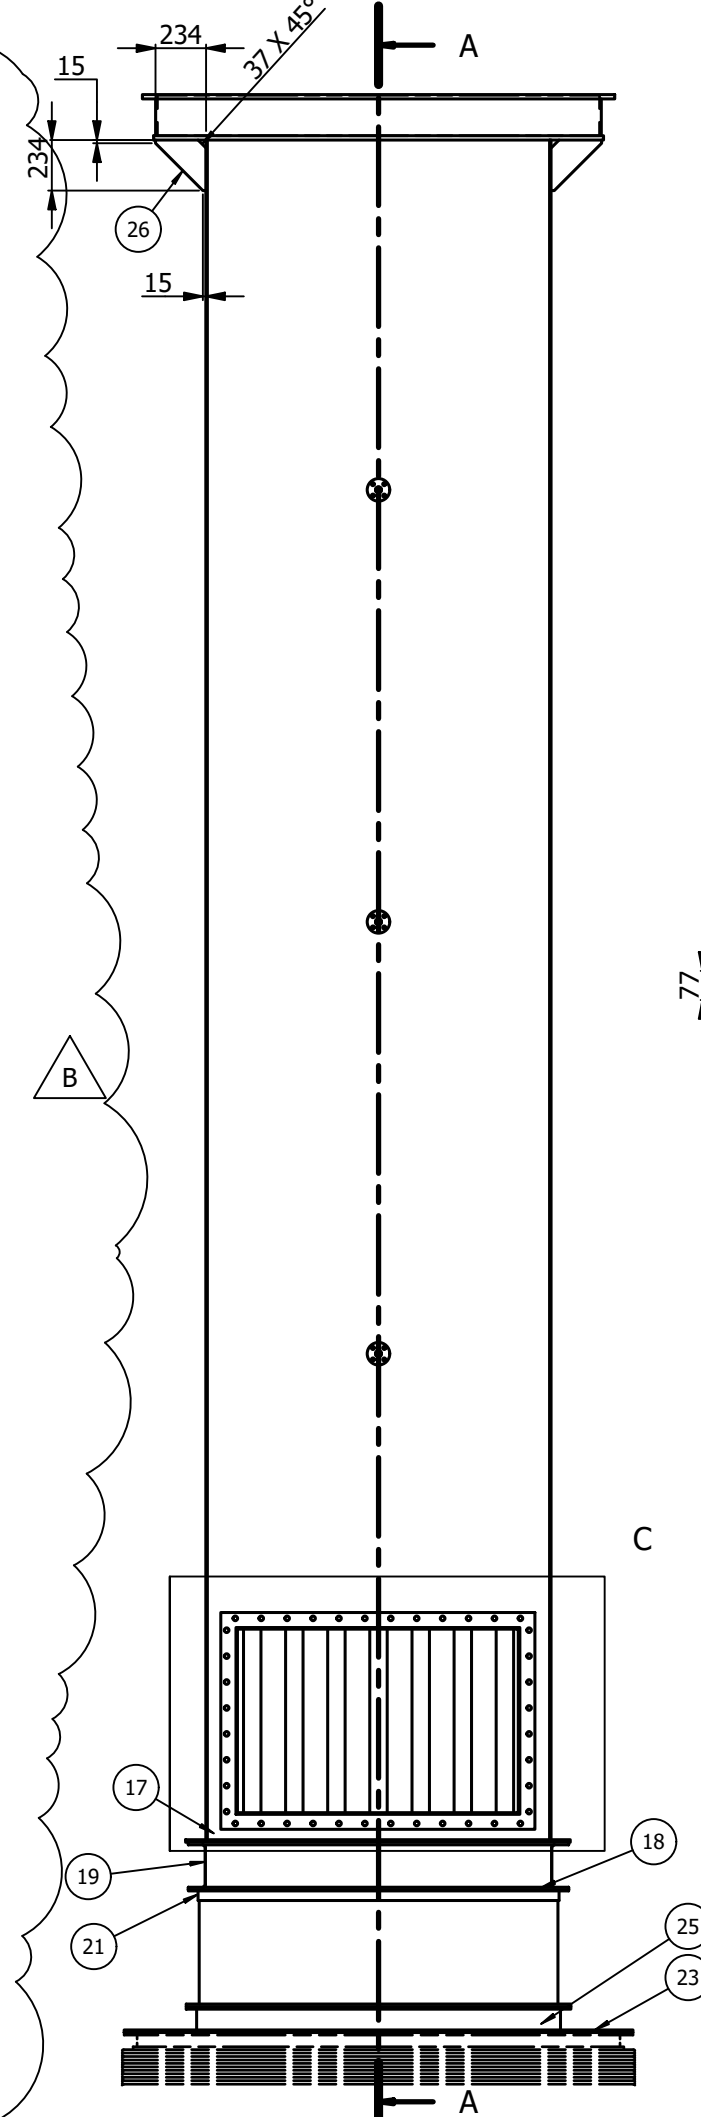


SIDE VIEW

ESCALA:(1 : 35)

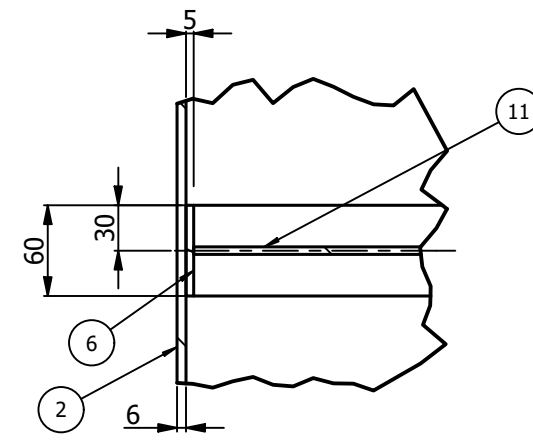


DETAIL F

ESCALA:(1 : 5)

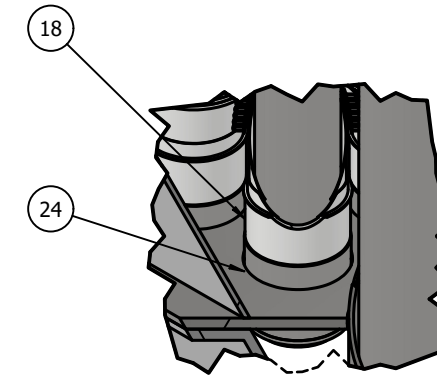


DETAIL CI

ESCALA:(1 : 10)

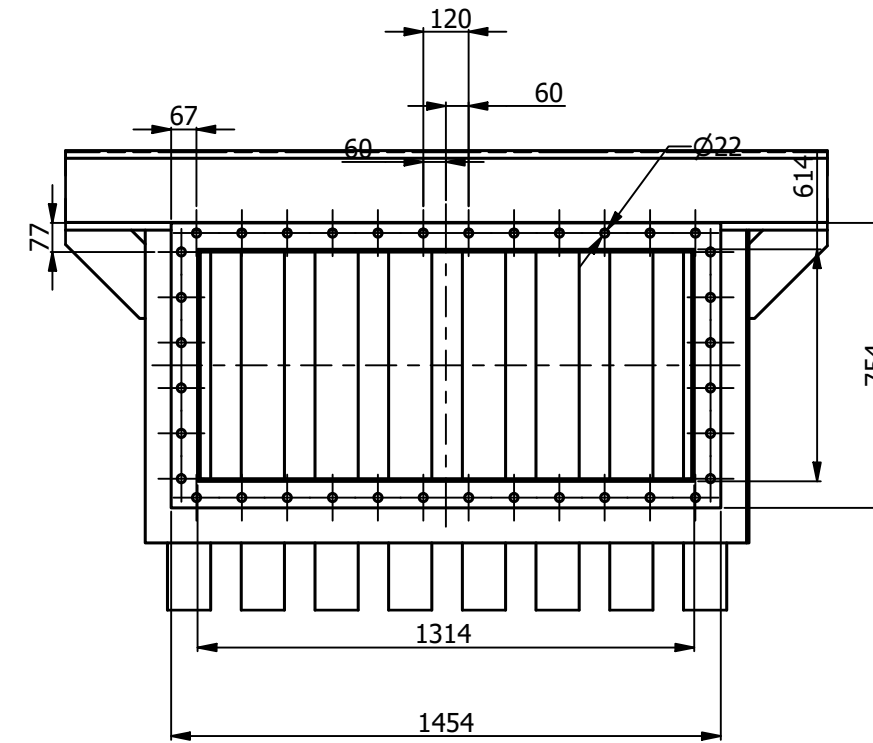


DETAIL D

ESCALA:(1 : 20)

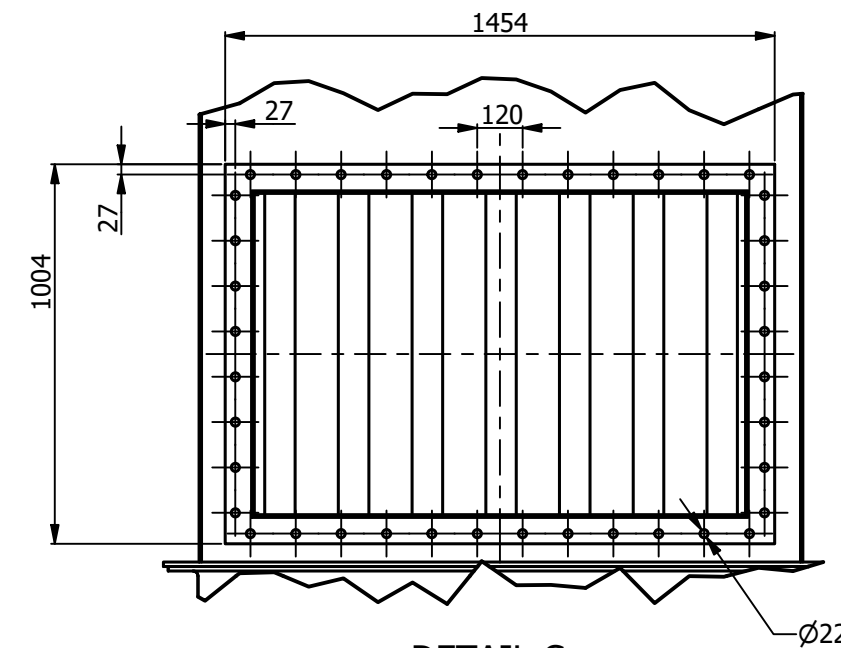

DETAIL C

ESCALA:(1 : 20)

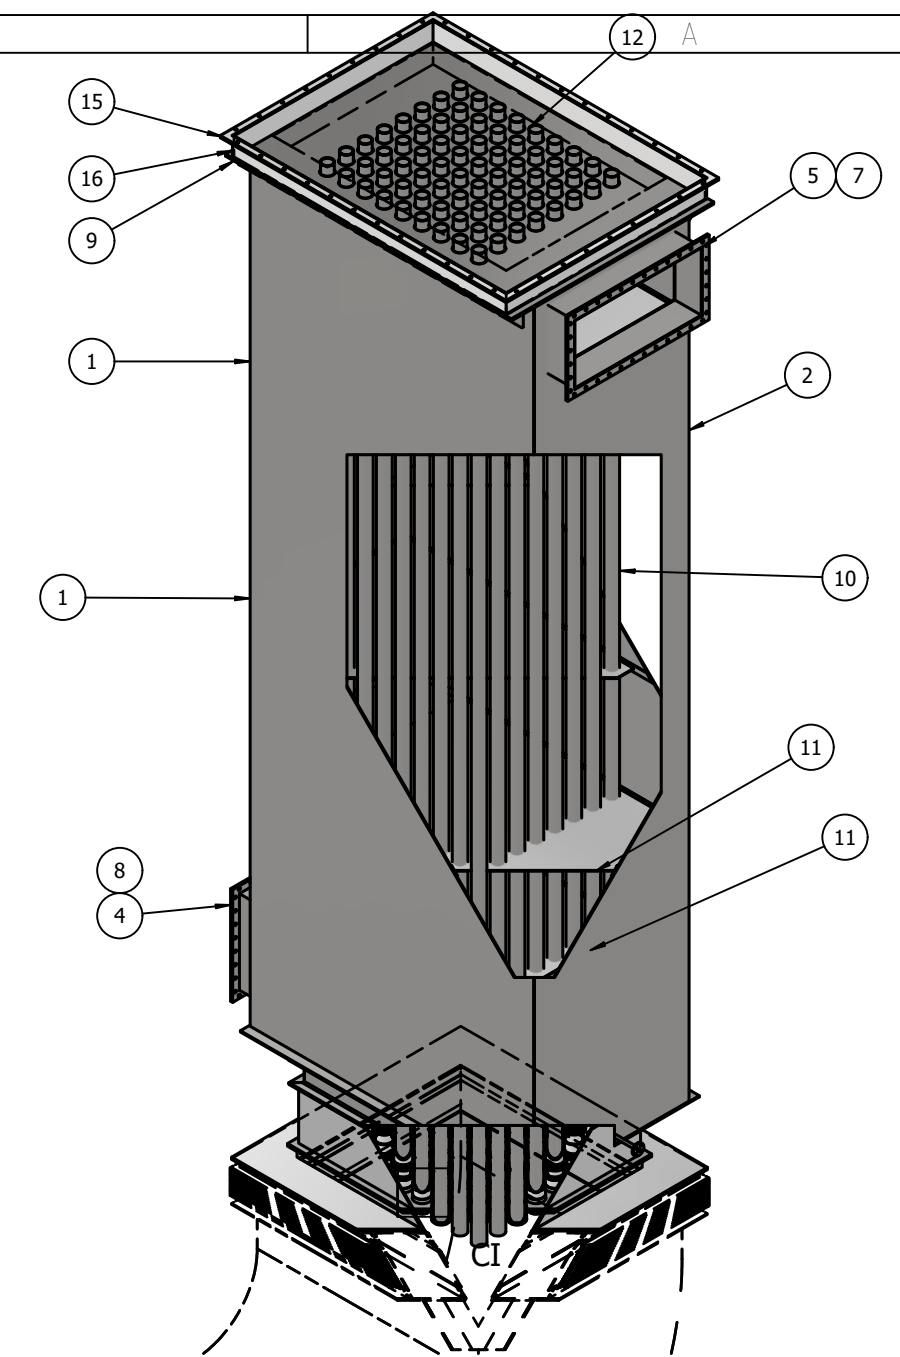

ISOMETRIC VIEW

ESCALA:(1 : 55)

APPROXIMATE WEIGHT:16750 KG

26	REINFORCEMENT PLATE 10 MM THICKNESS	20	AISI 310 S EN 1.4845 stainless steel	2,407 kg
25	COVER WASHER	72	AISI 310 S EN 1.4845 stainless steel	0,324 kg
24	BOTTOM TUBE COVER	72	AISI 310 S EN 1.4845 stainless steel	2,662 kg
23	SUPPORT REDUCER PROFILE	1	AISI 304 L stainless steel EN 1.4307	387,439 kg
22	RECTANGULAR BOX 1856* 1661* 6 THICKNESS	1	AISI 304 L stainless steel EN 1.4307	170,595 kg
21	ANGULAR PROFILE DIN 59370 - 50 x 5	7434,00 0 mm	AISI 304 L stainless steel EN 1.4307	*Varies*
19	DIN 1026-2 - UPE 220	7434,00 0 mm	AISI 304 L stainless steel EN 1.4307	*Varies*
18	INNER TUBE FLEXIBLE	72	AISI 310 S EN 1.4845 stainless steel	5,137 kg
17	INTERNAL PIPE BUSHING	72	AISI 310 S EN 1.4845 stainless steel	2,043 kg
16	RECTANGULAR DUCT TOP 2816*2063*8	1	AISI 310 S EN 1.4845 stainless steel	116,401 kg
15	TOP RECTANGULAR FLANGE	1	AISI 310 S EN 1.4845 stainless steel	94,023 kg
14	BRIDA DN20 EN 1092-1 TIP12 PN-40	4	AISI 304 L stainless steel EN 1.4307	0,954 kg
13	PIPE O.D 26.9 TKNS= 2mm	4	AISI 304 L stainless steel EN 1.4307	0,359 kg
12	BUSHING O.D. 100 mm HEIGHT 140 mm THICKNESS 1.5 mm	72	AISI 310 S EN 1.4845 stainless steel	0,524 kg
11	PERFORATED PLATE 2348*1575*5	6	AISI 304 L stainless steel EN 1.4307	147,924 kg
10	CAÑO S/C NPS 4 SCH40 SA 106 GR B	630,72 m	AISI 310 S EN 1.4845 stainless steel	73,51 kg
9	PLATE 2940 * 2083 * 20	1	AISI 310 S EN 1.4845 stainless steel	979,843 kg
8	BOTTOM RECTANGULAR DUCT	1	AISI 304 L stainless steel EN 1.4307	47,520 kg
7	TOP RECTANGULAR DUCT.	1	AISI 304 L stainless steel EN 1.4307	42,173 kg
6	RECTANGULAR PLATE 2914 * 1585 * 5 thickness X 60 width	6	AISI 310 S EN 1.4845 stainless steel	21,547 kg
5	TOP RECTANGULAR FLANGE	1	AISI 304 L stainless steel EN 1.4307	44,134 kg
4	BOTTOM RECTANGULAR FLANGE	1	AISI 304 L stainless steel EN 1.4307	49,490 kg
3	PLATE 2940* 1781 * 12 mm	1	AISI 304 L stainless steel EN 1.4307	502,669 kg
2	PLATE 6870* 1591 * 6 mm	2	AISI 304 L stainless steel EN 1.4307	601,016 kg
1	PLATE 6870 *2920 * thickness 6 mm	2	AISI 304 L stainless steel EN 1.4307	1103,059 kg
ITEM	DESCRIPCION	CANT.	MATERIAL	MASS

BILL OF MATERIALS