Roof plan slices · grid A

horizontal cuts through the roof, looking down

- 1 Inner layer 1, 80 printed, room side, then layer 2 (printed, thinner towards the crown).
- 2 Air zone, open between the ribs, for insulation (dotted).
- 3 Cast ribs cut by the plane (crossed hatch): columns of grid A; each 160 wide across the rib and 240 deep. The cut is longer than 160 and sheared where the rib is inclined in the face; 4 Ø16 and stirrups as in the rib section.
- 4 Corner blocks: the four hip ribs, cut across the corners (cast).
- 5 Outer layer 80, printed.
- 6 Insulation 100 (very thin line), then the outer layer 30 (dark).

● from your sketches
○ assumed by me, to confirm


Notes

Large slice at +5.90 (3400 above the eave, just below the middle horizontal rib of option A), 1:50; small slices at +7.00 and +8.00, 1:100.


Option A: all columns at +5.90, every other column after they pass 500 spacing (+7.00), then only the hip columns (+8.00). Option B: the diamond lattice keeps the same two diagonal families at every height, clipped by the hips.

Layer 2 thins towards the crown (the leaf is 160 at the base, 80 at the crown). Ribs use the same geometry as the roof-grid sheets; bars and stirrups are assumed.


cut at +5.90 (1:50)

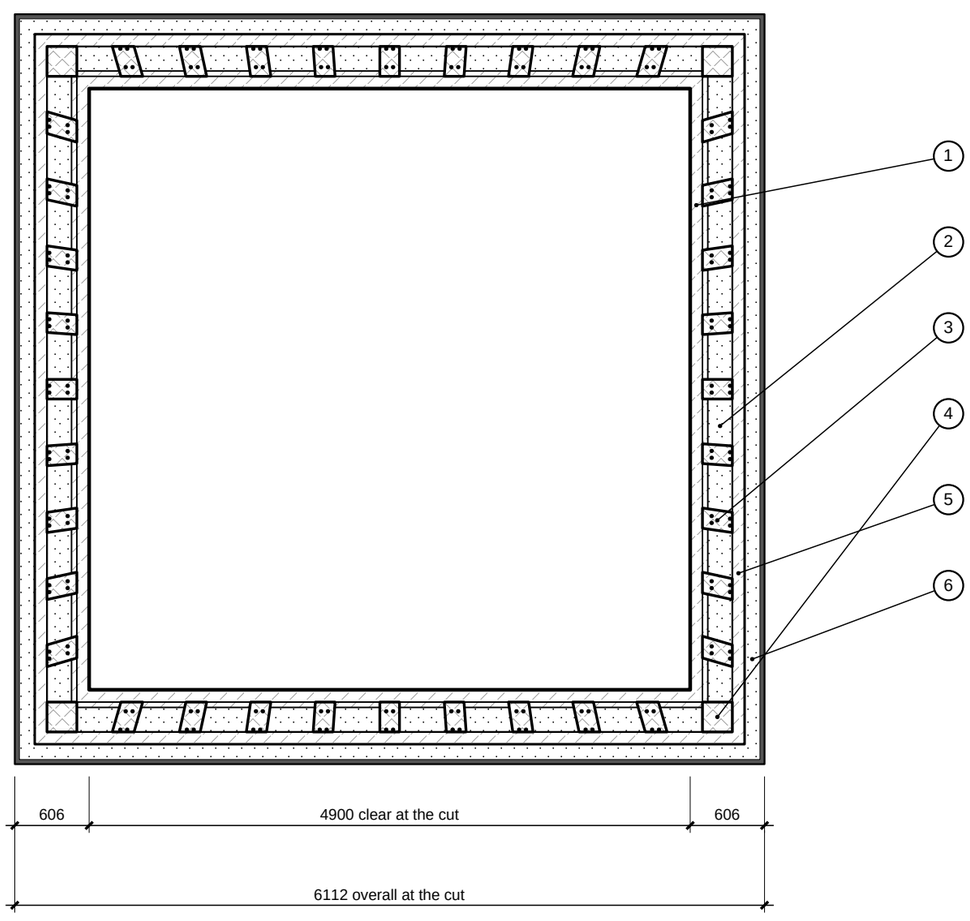

cut at +7.00 (1:100)

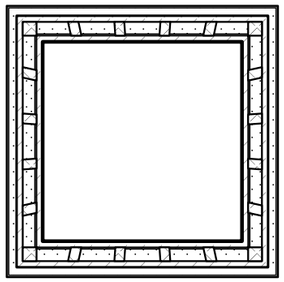

cut at +8.00 (1:100)



0 1 2 3 4 5 m

Scale 1:50 at A3 · dimensions in mm · draft 1, 2026-10-11
pyramid-roof · hand estimates, not engineered