
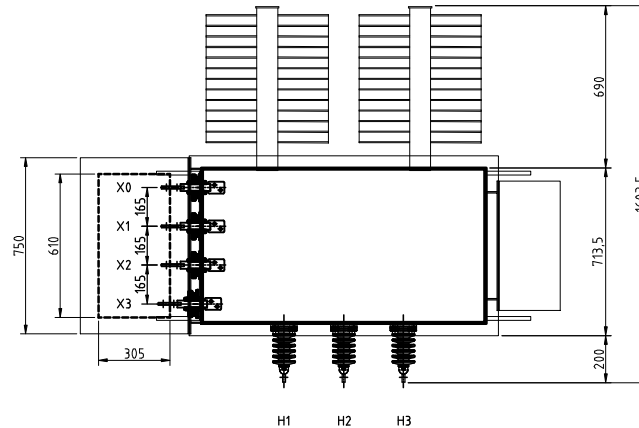
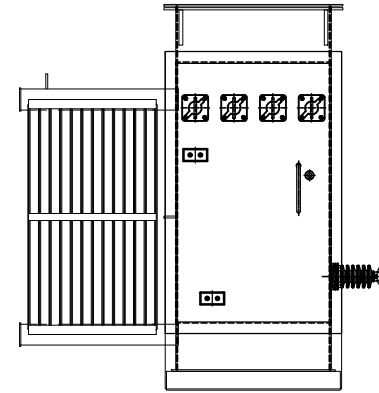
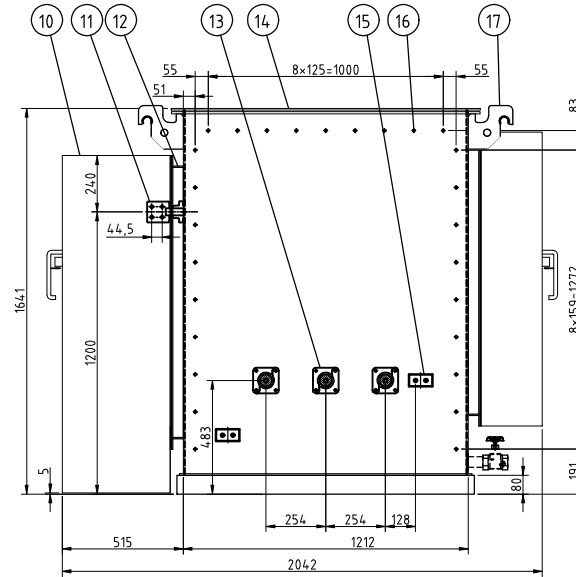


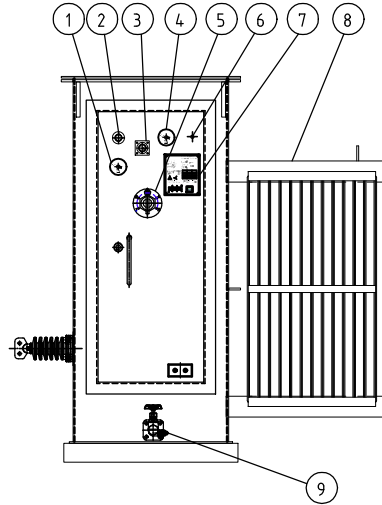

Note:

1.Internal fusing not provided.
external protection shall be
provided.

2.The above external dimensions
are for reference only and the order
should be performed based on the
real size.

ITEM	WEIGHT(Kg)
Body weight	1150
Tank & accesories	1040
Total oil weight	760
Total weight	2950

Rating	kVA	1000
Phase		3
Frequency	Hz	60
H.V.	V	13800
L.V.	V	600Y/347
Vector Group		Dyn1
Material of winding		Aluminium
No Load Loss	W	1500 (+0%)
Load Loss	W	11200 (+0%)
Impedance	%	5.75 (±7.5%)
Altitude		<1000m
INSULATING OIL		mineral oil (45#)

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Oil thermometer (BWS-70)	1
2	Oil fill valve (1")	1
3	Oil-level indicator (QUALITROL No.020-031-01)	1
4	Vacuum manometer (YZ-70)	1
5	Tap changer (WSLI13-63/20-6×5)	1
6	Hand Valve (QUALITROL No.201-020-08)	1
7	Nameplate	1
8	Radiators(PG1000-14/520)	3
9	Oil drain valve (1")	1
10	Metal jacket, h.v & l.v	1/1
11	Lv bushing (1.0KV 1600A)	4
12	Throat flange,h.v & l.v	1/1
13	Hv bushing (TG-15/208)	3
14	Tank and cover assembly	1
15	2-hole horiz nema grd pad	5
16	Bolts	27
17	Lifting lugs	4

TYPE
ZGSL-Z-1000/13.8/0.6

DWG. NAME
General Assembly Drawing

DRAWN	CHECKED	CHECKED	APPROVED
H.H.Xu		X.K.Jin	D.J.Mei

FIRST ANGLE
PROJECTION

SCALE 1

1.710.3499

JIEZOU POWER

REV.
NO.

0