
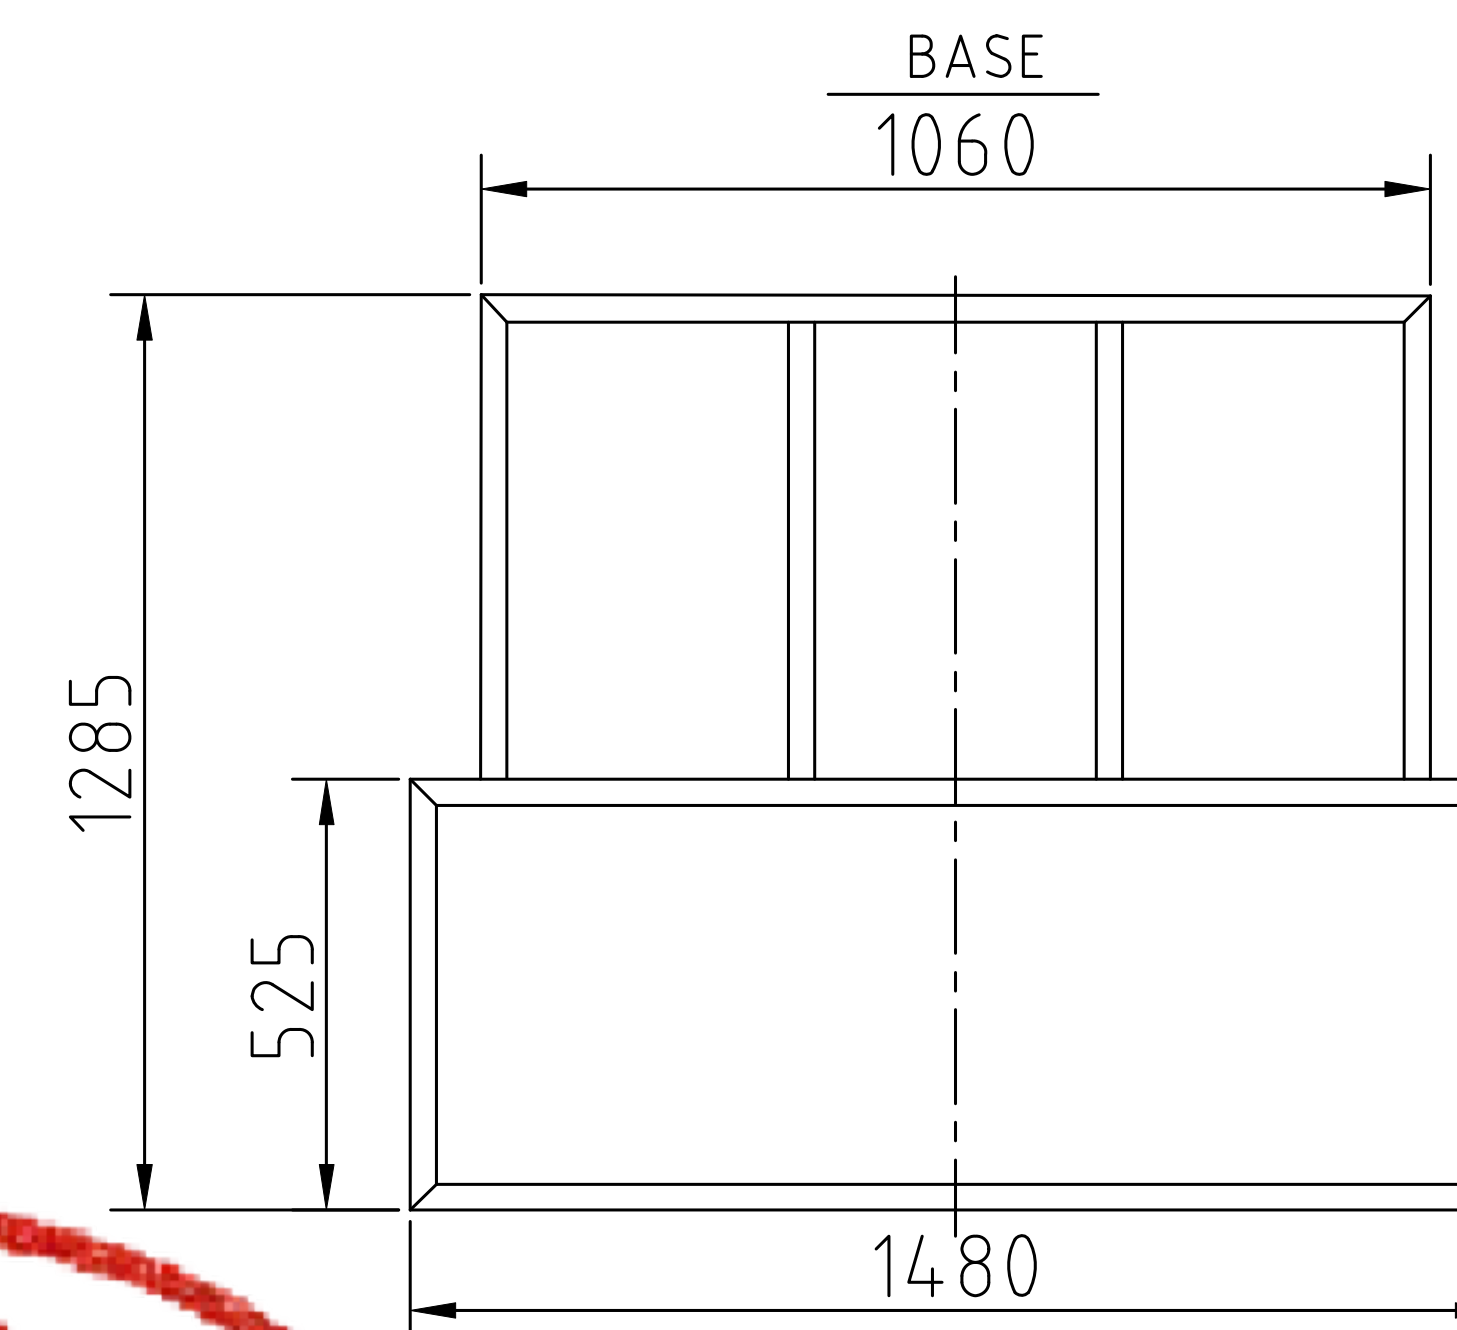


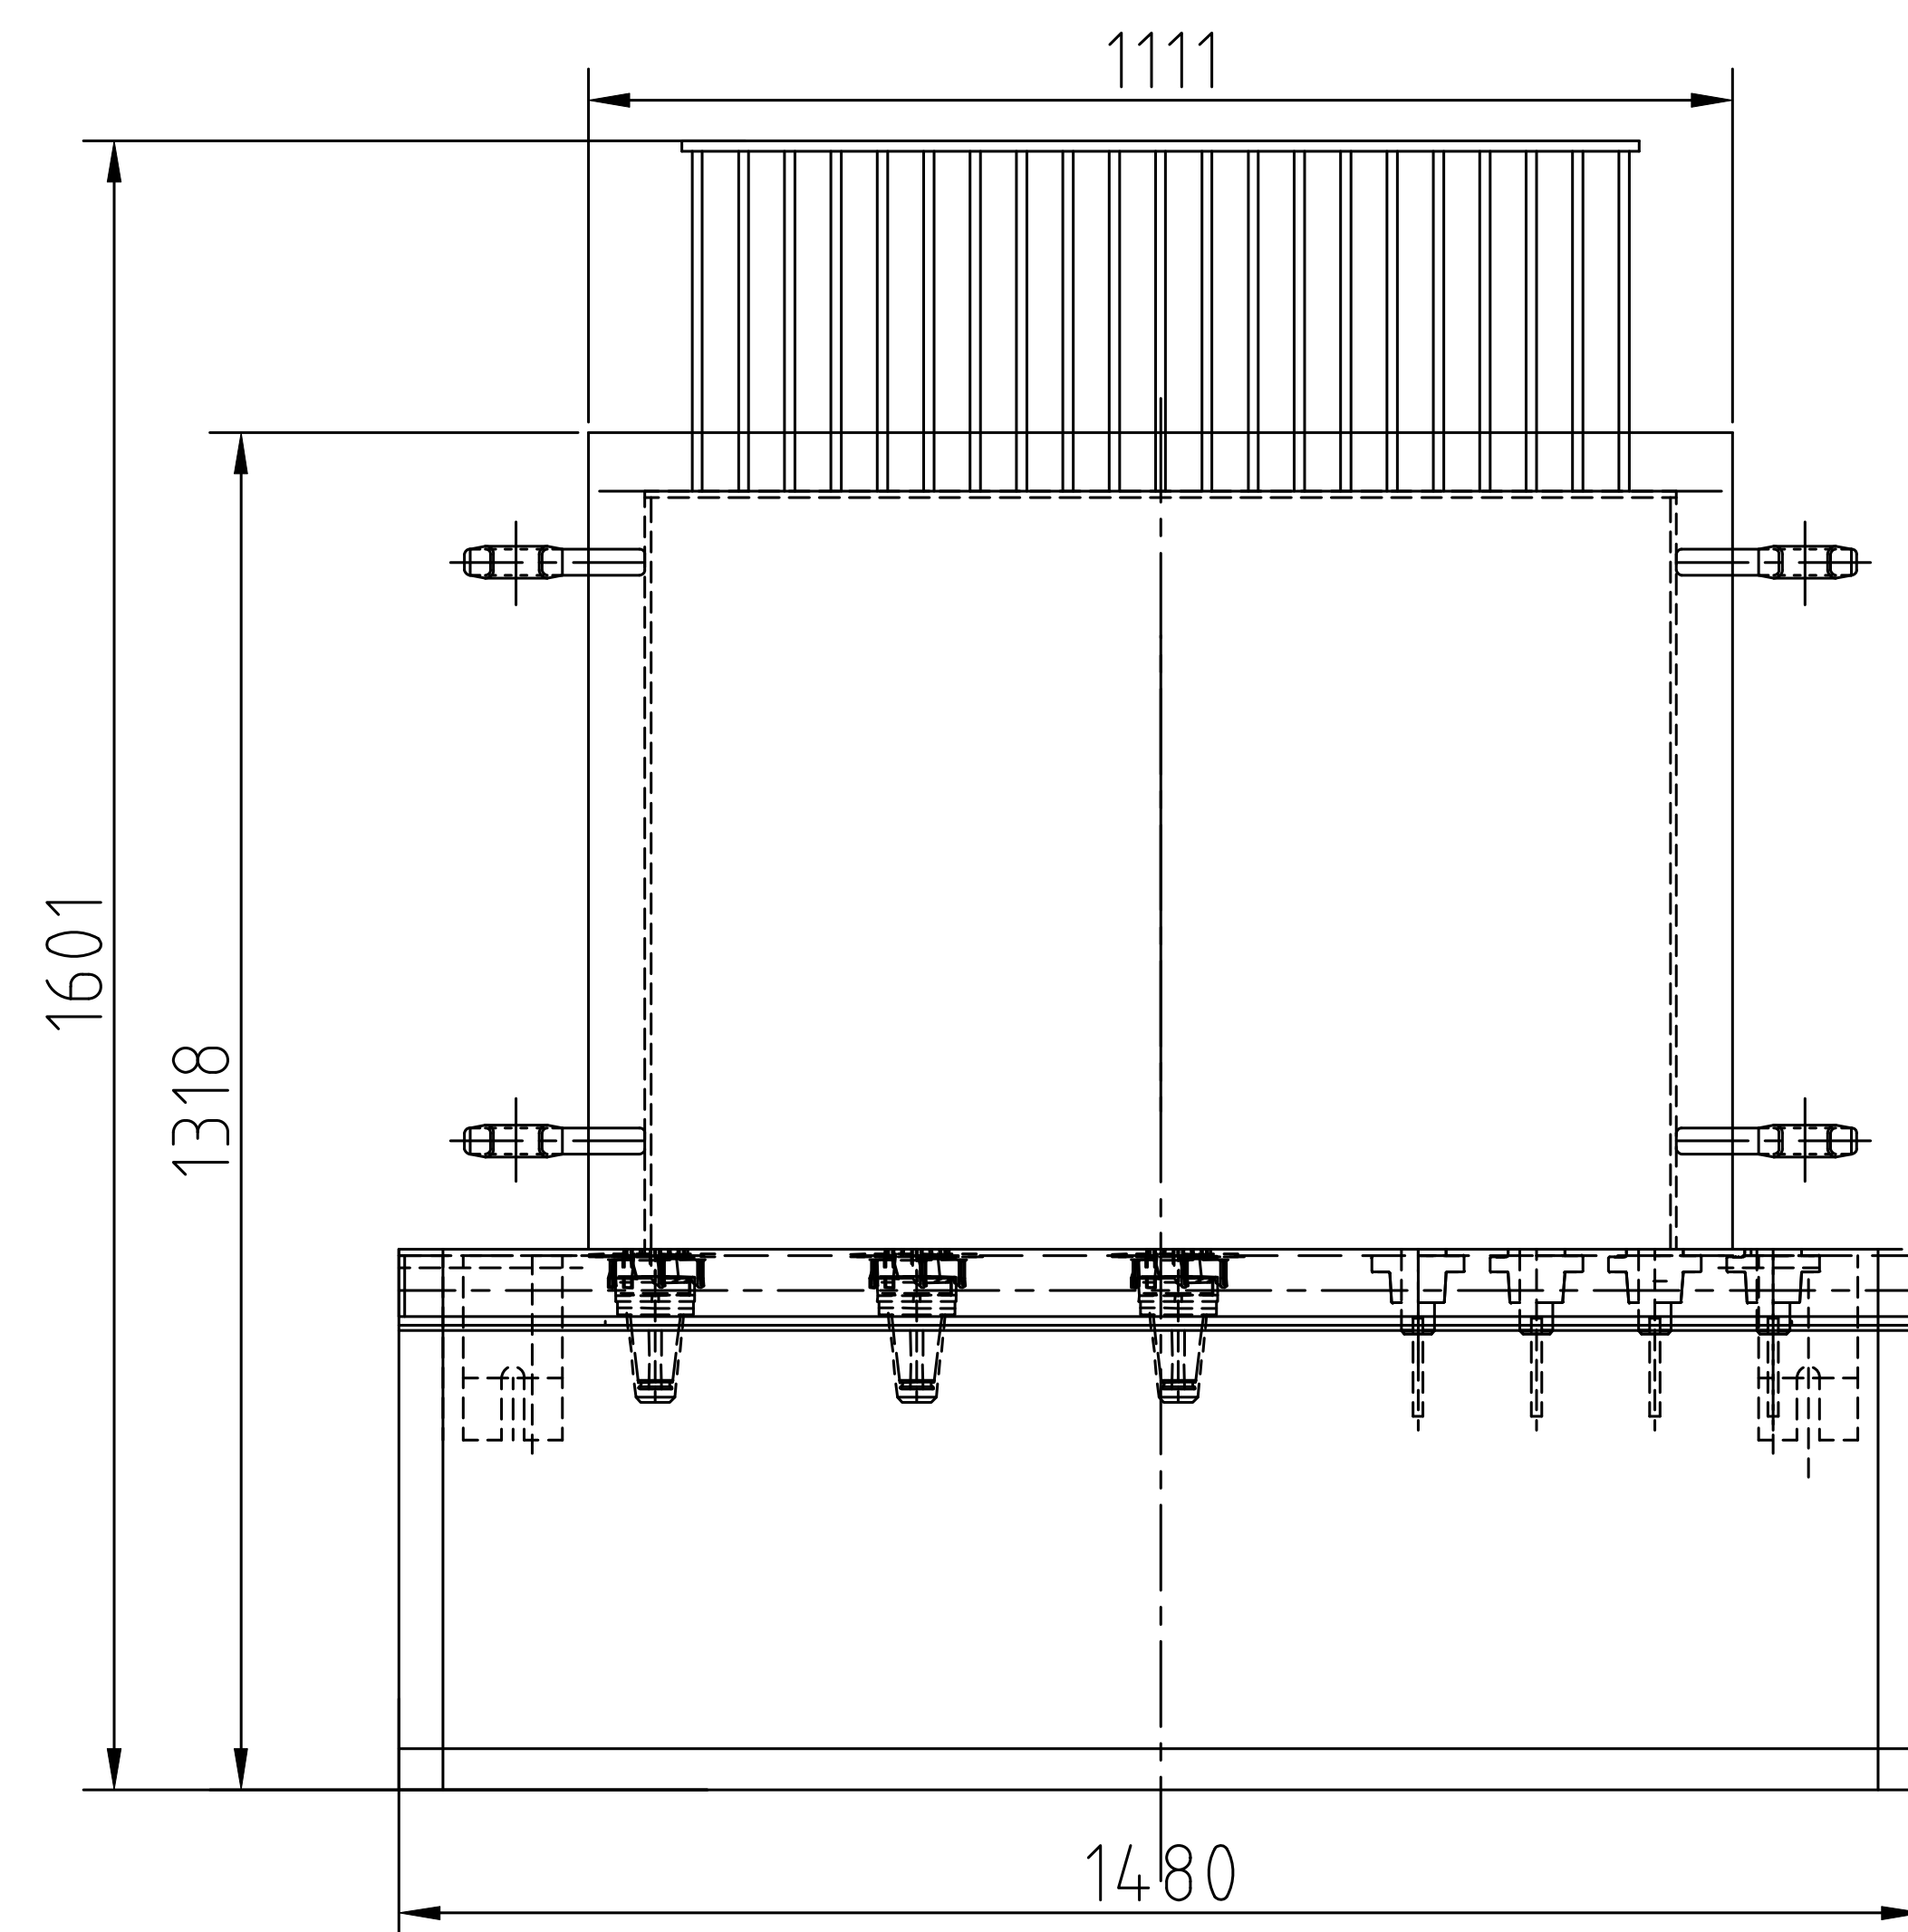


ITEM	WEIGHT
TANK & ACCESORIES	850Kg
TOTAL OIL WEIGHT	740Kg
TOTAL WEIGHT	2450Kg

DWG. NAME
General Assembly Drawing

JZD
SINCE 1989 FROM USA

 $\triangle O$

The oil filled transformers are not affected by the air due to elevation (~5,500 feet)

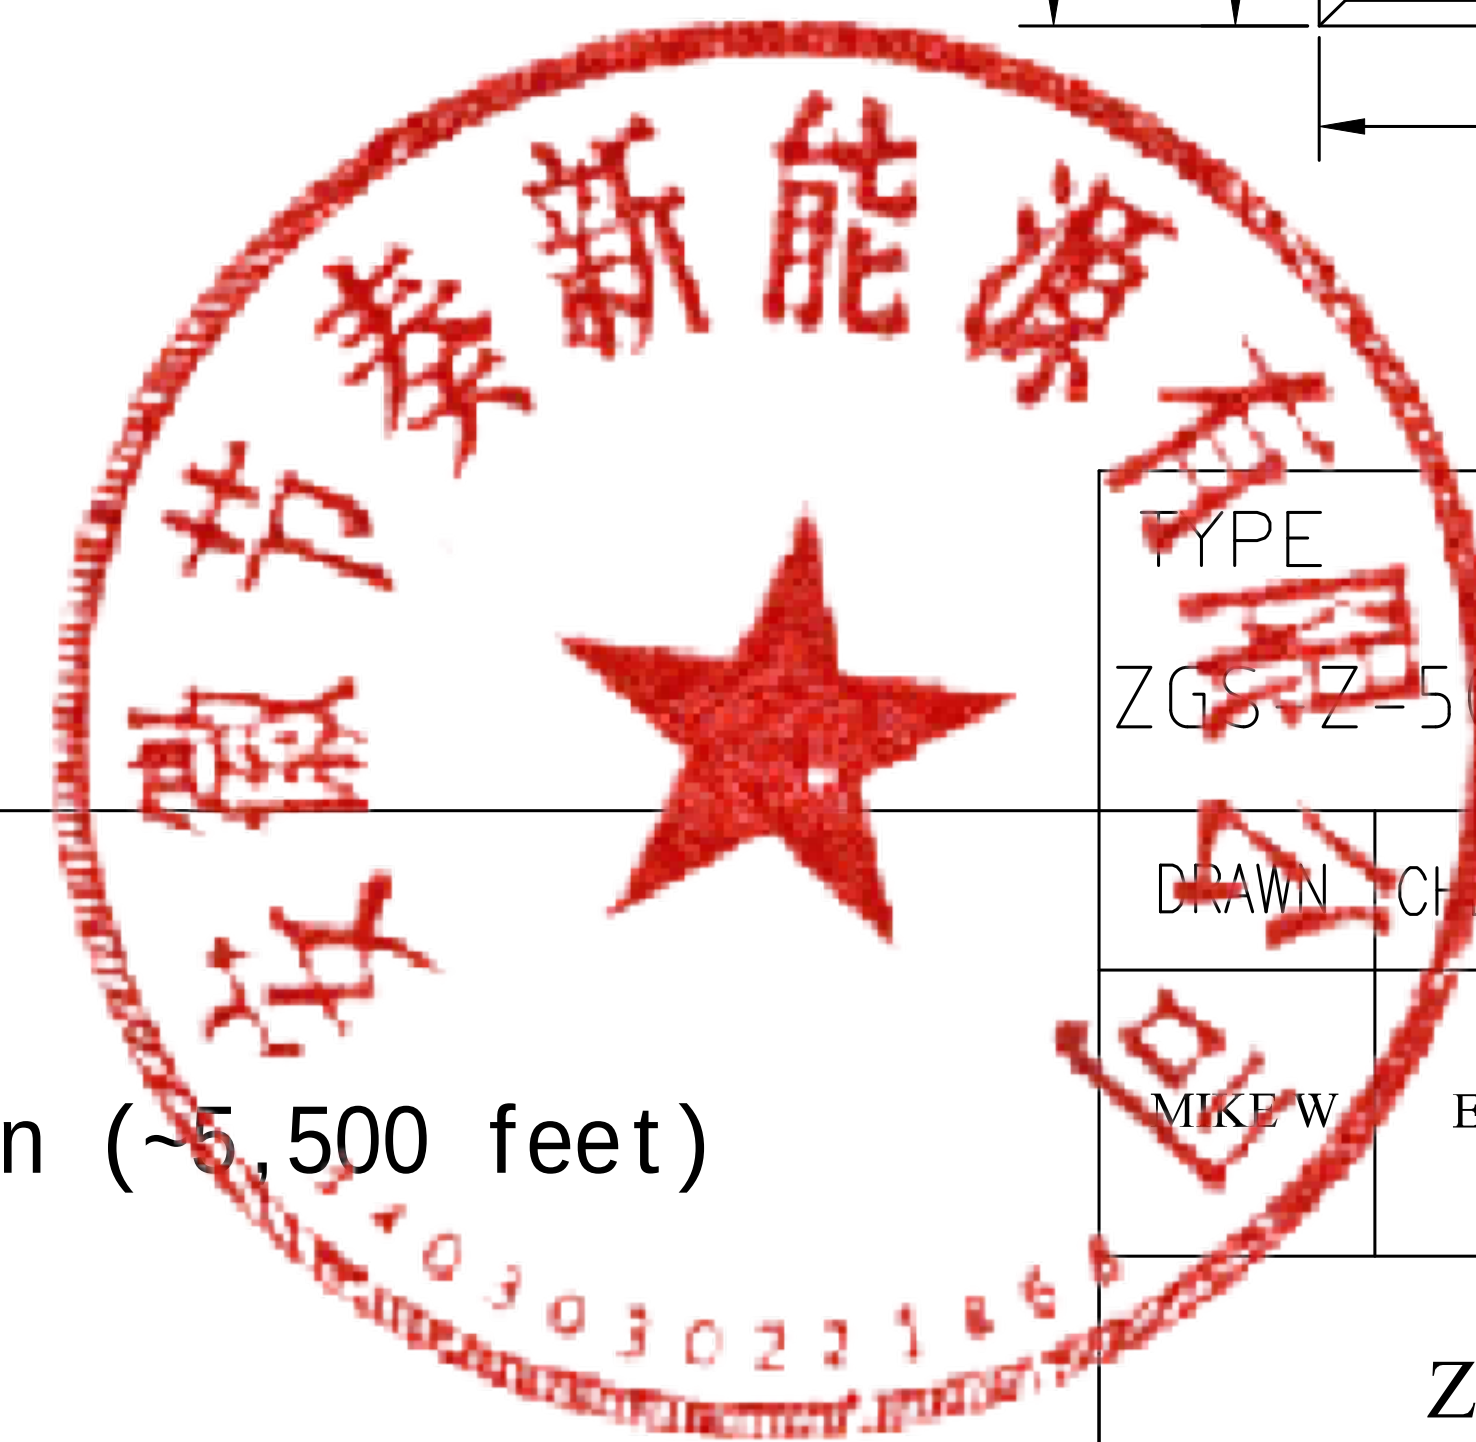ZGS500-231124-02

OLI-2 } To OLI
OLI-1 }
OLI-3 }

OTI-2 } To OTI
OTI-3 }
OTI-1 }



JZP
SINCE 1989 FROM USA

NAMEPLATE


150

140



THREE PHASE
PAD MOUNT TRANSFORMER

STANDARDS CSA C227.4
500kVA HV 7200V DELTA
LV 600V WYE/347V
TYPE OF COLING KNAN
PERCENT IMPEDANCE: 4 %
TYPE OF OIL FR3 NO PCB
CORE & COLL (UNTAKING): LBS
TANK & FITTINGS: LBS
LIQUID: GALS LBS
TOTAL: LBS

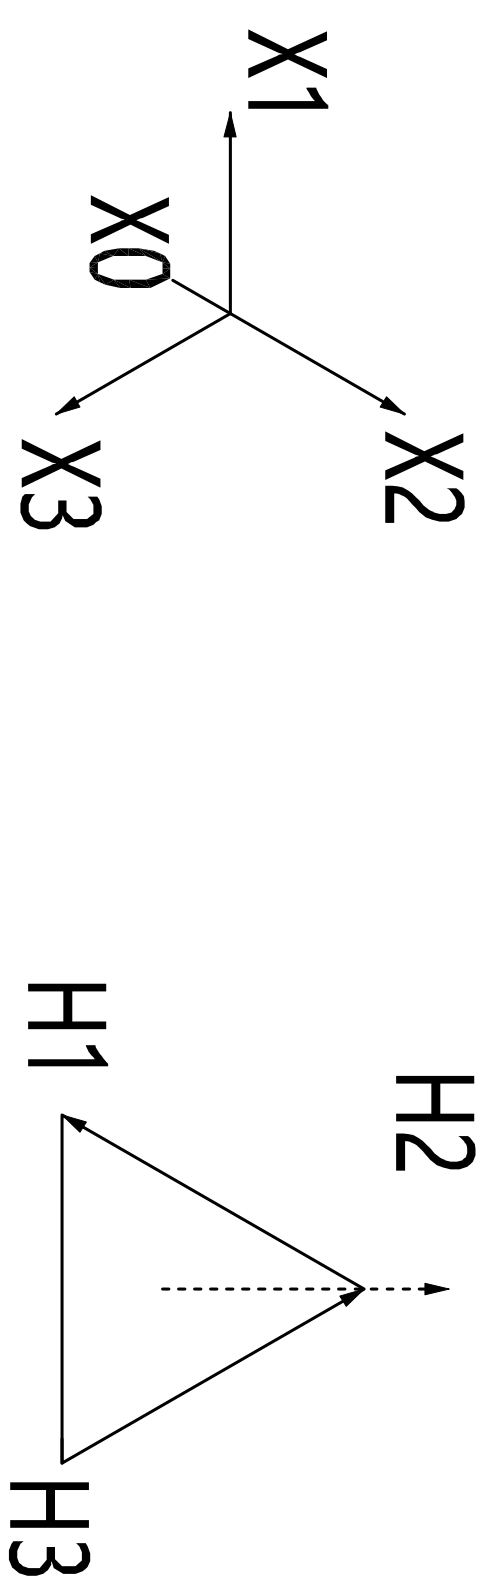


VECTOR GRAPH (Dyn1)

L. V WIRING

H. V WIRING

SCHEMATIC DIAGRAM


SCHEMATIC DIAGRAM

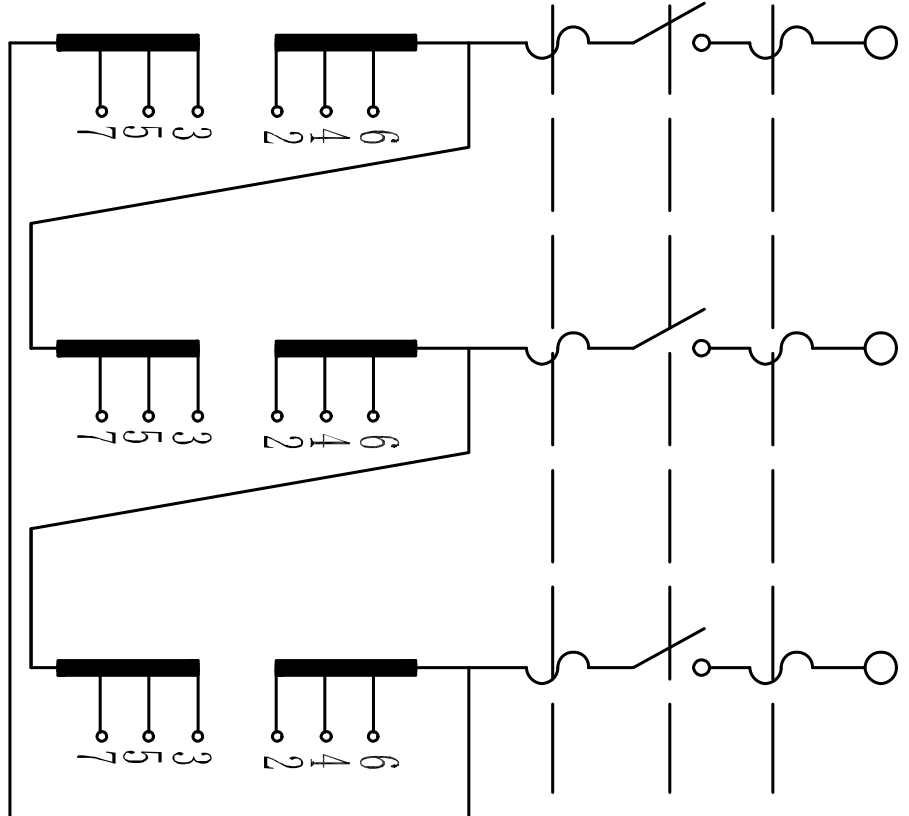

PRODUCT NO. :
TYPE ZGS-Z-500/7.2/0.6
CONDUCTOR MATERIAL: COPPER
PHASE 3
FREQUENTY 60Hz
TEMPERATURE RISE 65° C/ 65° C
SERIAL NO. :
DATE OF MFG. :
H. V. Um/BIL/AC 15/75/26 kV
L. V. Um/BIL/AC 1.2/30/10 kV

Tapping Range	H. V		L. V	
	Voltage (V)	Current (A)	Voltage (V)	Current (A)
1 +5 %	7560	38.19	600	481.14
2 +2.5 %	7380	39.12		
3 Rated	7200	40.09		
4 -2.5 %	7020	41.12		
5 -5 %	6840	42.21		

DE-ENERGIZE TRANSFORMER
BEFORE OPERATING TAPCHANGER

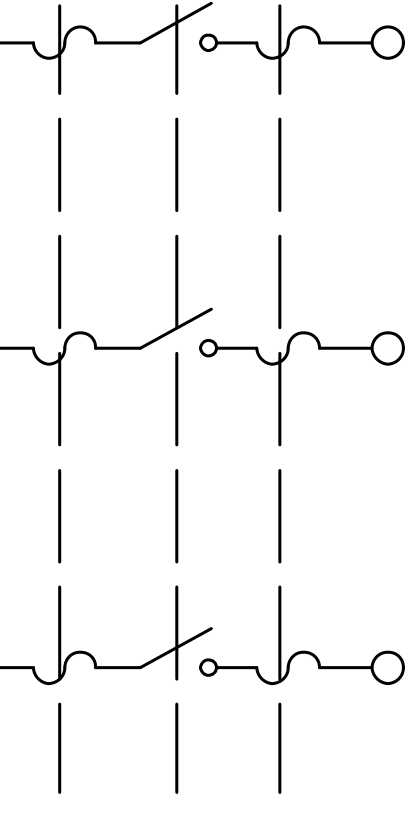

CURRENT LIMITING FUSES
2 POS. LB SWITCH
BAYONET FUSES

CBUC8150D100

4000353C14M

ITEM:
MANUFACTURER:
PART NUMBER:

WWW.JIEZOUPOER.COM



165

175