
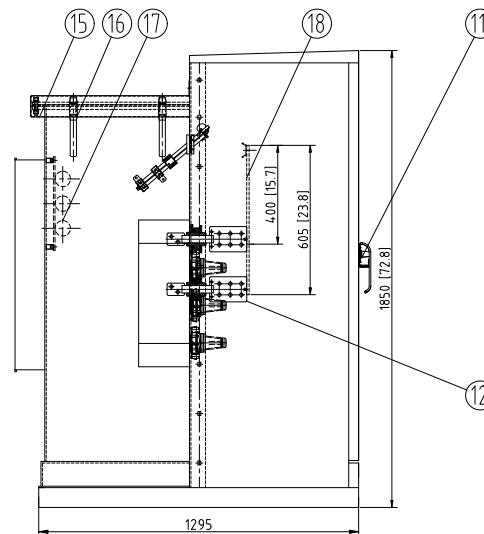


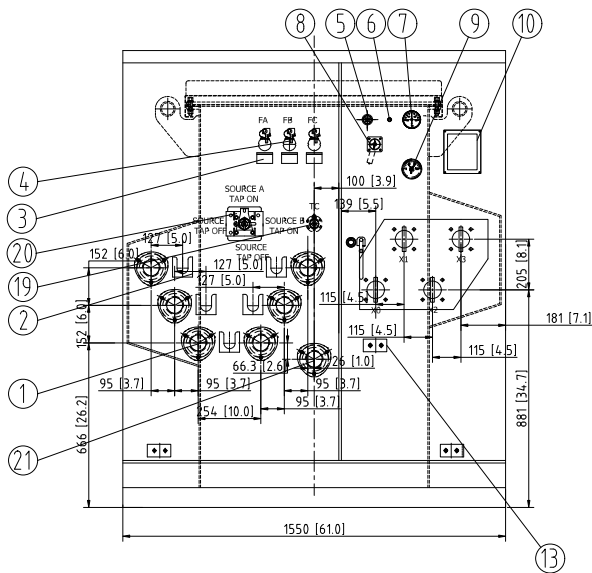


ITEM	WEIGHT(LBS)
CORE WEIGHT	685 LBS
TOTAL OIL WEIGHT	1085 LBS
TOTAL WEIGHT	3220 LBS

TECHNICAL DATA	
RATING	112.5kVA
PRIMARY VOLTAGE(V)	12470GrdY/7200
SECONDARY VOLTAGE(V)	480GrdY/277
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
CONDUCTOR	ALUMINUM
PRIMARY BIL VOLTAGE	95kV
SECONDARY BIL VOLTAGE	30kV
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	≤1700 W
NO LOAD LOSSES	≤150 W
IMPEDANCE	4%
ALTITUDE	≤1000m
COLOR	MUBSELL NO.7.0 GY 3.2/1.5
CORE FORM	THREE-PHASE THREE-COLUMN



PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (15kV,200A)	6
2	PARKING STAND BRACKET	5
3	DRIP TRAY	1
4	BAYONET FUSE (4000353C06M)	3
5	FILL PLUG	1
6	PRESSURE RELIEF VALVE	1
7	VACUUM PRESSURE GAUGE	1
8	OIL LEVEL GAUGE	1
9	OIL TEMPERATURE GAUGE	1
10	NAMEPLATE	1
11	DOOR HANDLE	1
12	LV BUSHING(FTG1-1/1000,6 HOLE,BIL:30kV)	4
13	GROUND STEEL PADS	3
14	1" DRAIN VALVE WITH 3/8" SAMPLER	1
15	FLIP TOP COVER	1
16	LIFTING LUG	4
17	ELSP FUSE (CBUC08030C100)	3
18	BUSHING SPADE SUPPORT	4
19	TAP CHANGER(WSLI13 63/20-6x5)	1
20	FOUR POSITION LOADBREAK SWITCH	1
21	H0 BUSHING (15kV,200A)	1

Per customer request
Please change secondary voltage to


120/208 低压换成120/208V

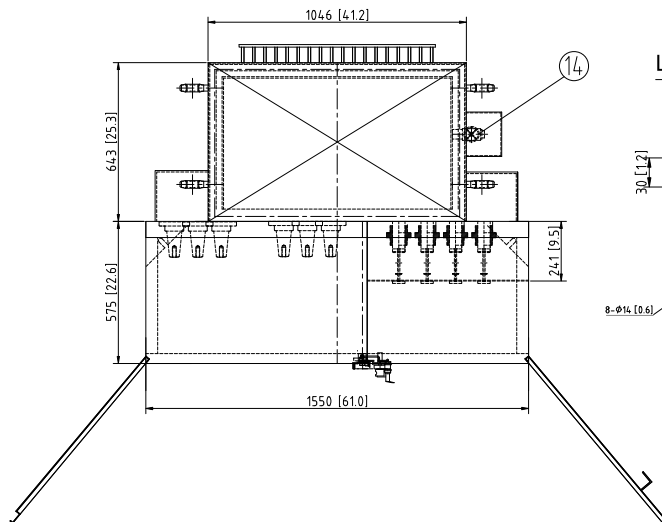

L.V. TERMINAL

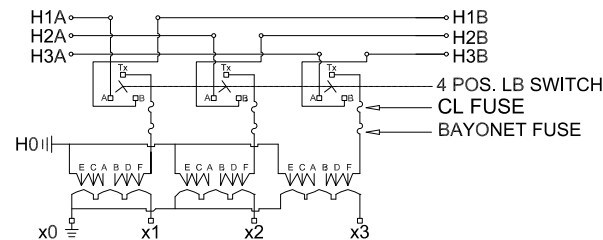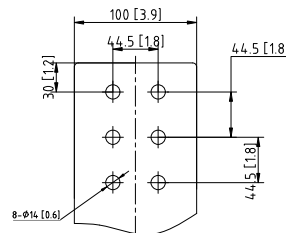

GROUND PAD
STAINLESS STEEL




Approved 4/18/2024
ECB Solutions on behalf of
City of Nixa

[Signature]

TYPE ZGSL-H-112.5/12.47/0.48					DWG. NAME General Assembly Drawing				
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1		
Mike	Jack	Iris		Sam	JZP POWER TRANSFORMER				REV. NO.
JZP-ZGS112.5-240418-002									

NOTE:
1.ALL DIMENSIONS ARE IN MILLIMETERS
2.MATERIAL:STAINLESS STEEL
3.THICKNESS :1mm
4.LETTER COLOR: BLACK

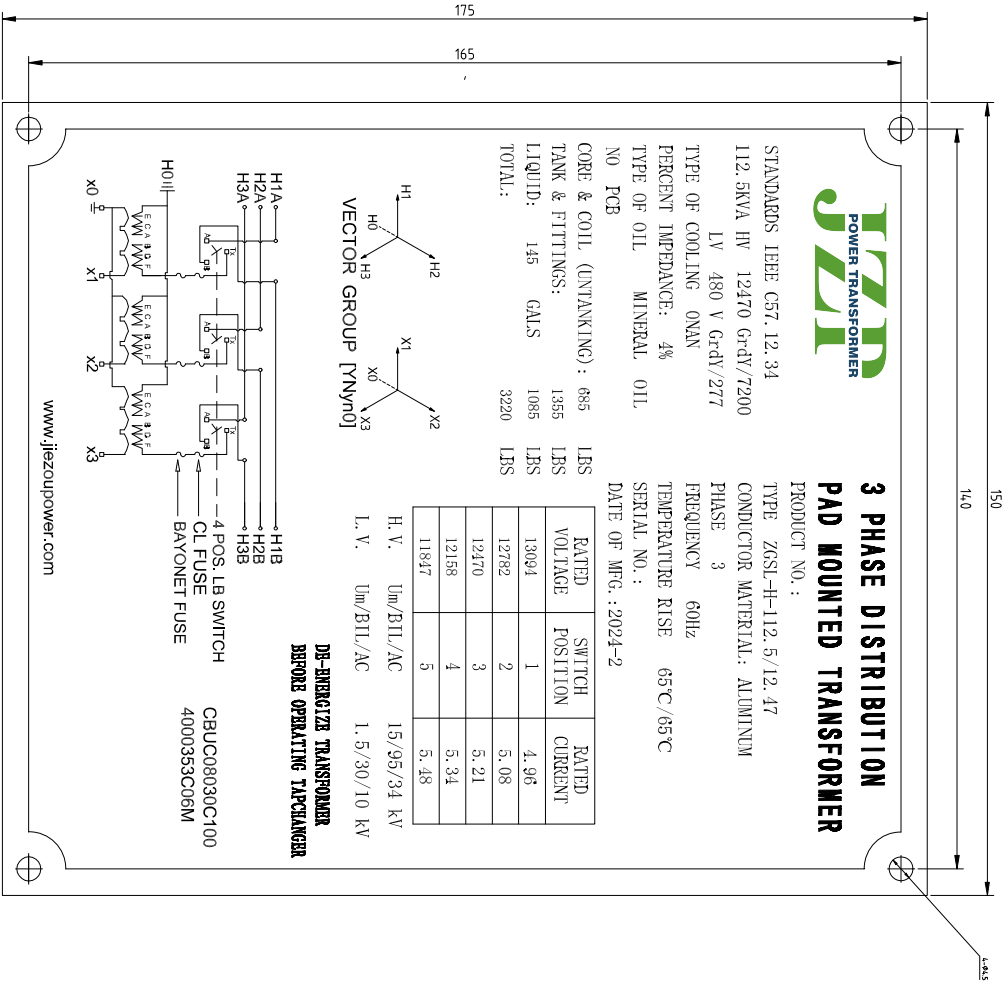

CHANGE							
TYPE				DWG. NAME			
ZGSL-H-112.5/12.47/0.48				Name Plate			
FIRST ANGLE PROJECTION	SCALE	1 / 2		DRAWN	CHECKED	CHECKED	APPROVED
			Mikelack	Iris			SAM
		REF. DWG. NO.					REV. NO.
		DWG. NO.	JZP-ZGS112.5-240418-002				