
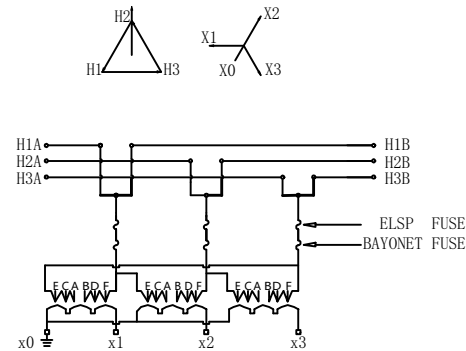

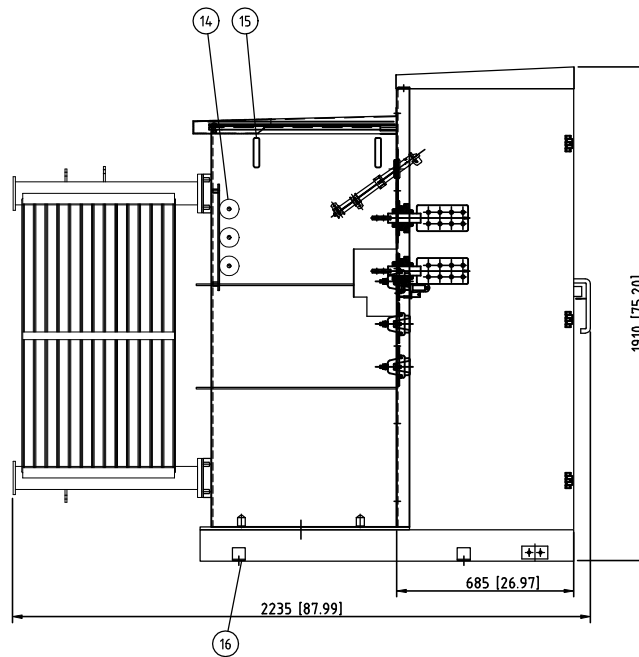
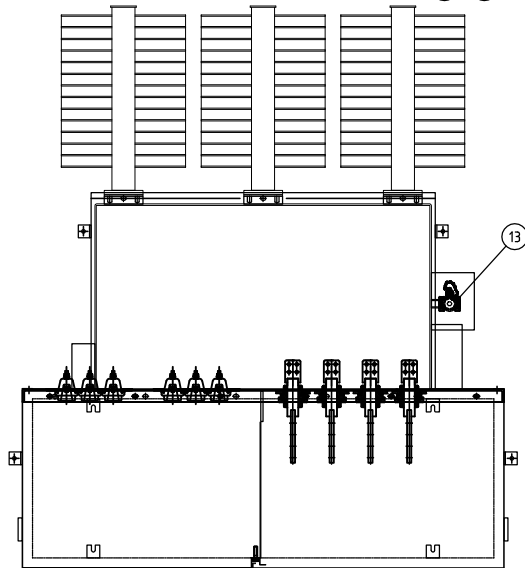


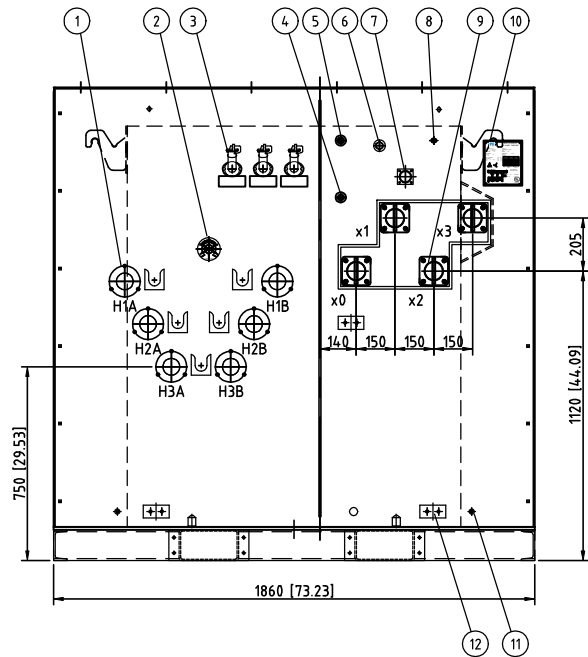

ITEM	WEIGHT(LBS)
Body weight	3280
Tank & accesories	3530
Total oil weight	2160
Total weight	8970

Rating	kVA	1500
Phase		3
Frequency	Hz	60
H.V.	V	12000
L.V.	V	480Y/277
Vector Group		Dyn1
Material Of Winding		aluminium
No Load Loss	W	1400(+10%)
Load Loss	W	14500(+6%)
Impedance	%	5.75 (±7.5%)
Altitude		<1000m
Insulating Oil		biodegradable oil (FR3)

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Hv bushing (TGZ-15/200)	6
2	Tap changer (WSLII3-125/20-6×5)	1
3	Bayonet fuse (4038361C04CB)	3
4	Oil thermometer (BWS-70)	1
5	Vacuum manometer (YZ-70)	1
6	Pocket	1
7	Oil-level indicator (UHZ-01)	1
8	Hand valve (YSF)	1
9	Lv bushing (1.0KV 2500A)	4
10	Nameplate	1
11	Ground terminal	3
12	2-hole horiz nema grd pad	5
13	Drain valve	1
14	Elsf fuse (CBUC15165D100)	3
15	Lifting lug	4
16	Connected steel-plate	4
17		
18		

TYPE ZGSL-1500/12.0/0.48					DWG. NAME General Assembly Drawing		
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1
Mike W.	Iris J.	Ella W.		Sam S.			
							REV. NO. 2