

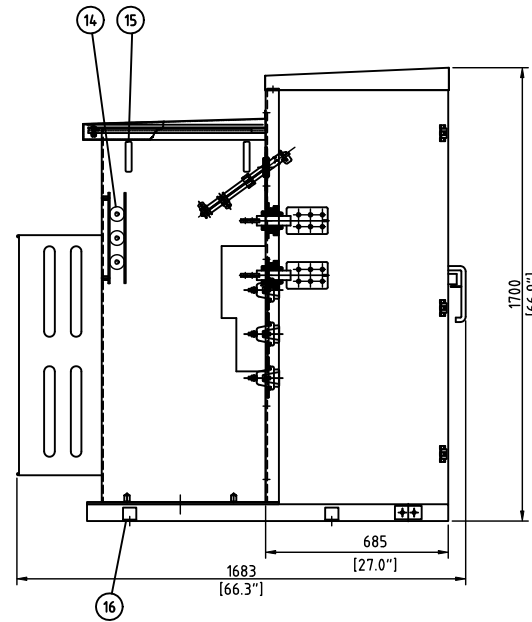
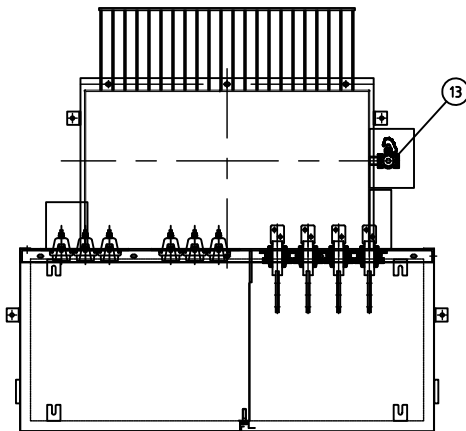
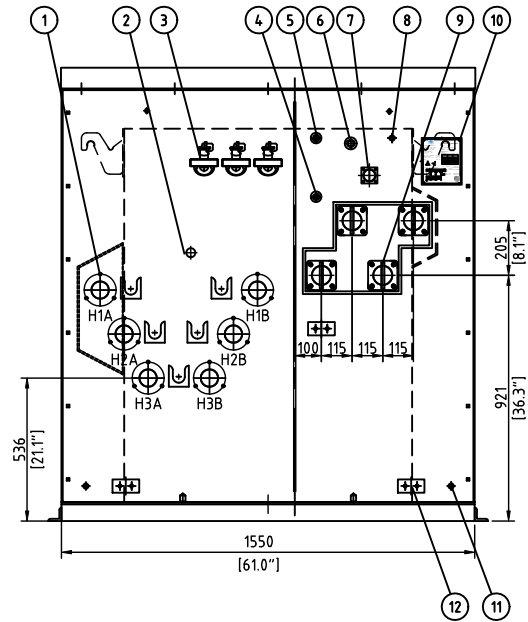


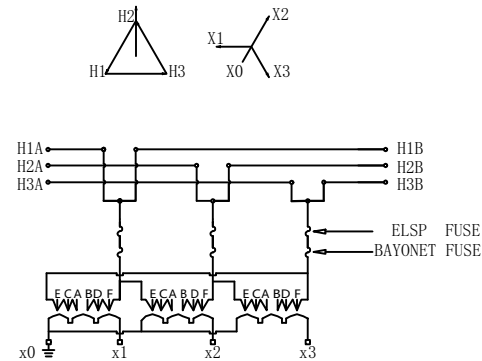

Lv bushing



ITEM	WEIGHT(LBS)
Body weight	1790
Tank & accessories	1980
Total oil weight	1300
Total weight	5070

Rating	kVA	500
Phase		3
Frequency	Hz	60
H.V.	V	12000
L.V.	V	208Y/120
Vector Group		Dyn1
Material Of Winding		aluminium
No Load Loss	W	600 (+10%)
Load Loss	W	5410 (+6%)
Impedance	%	5.0 (±7.5%)
Altitude		<1000m
Insulating Oil		biodegradable oil (FR3)

ITEM	FITTINGS AND DESCRIPTIONS	QTY
1	Hv bushing (TGZ-15/200)	6
2	Tap changer (WSL 63/20-6×5)	1
3	Bayonet fuse (4000358C10M)	3
4	Oil thermometer (BWS-70)	1
5	Vacuum pressure gauge (YZ-70)	1
6	Oil fill valve	1
7	Oil level indicator (UHZ-01)	1
8	Vent valve (YSF)	1
9	Lv bushing (1.0KV 1600A)	4
10	Nameplate	1
11	Ground terminal	3
12	2-hole horiz nema grd pad	5
13	Drain valve	1
14	Elsp fuse (CBUC15100C100)	3
15	Lifting lug	4
16	Connected steel-plate	4
17		
18		

TYPE
ZGSL-H-500/13.2/0.208DWG. NAME
General Assembly Drawing

DRAWN	CHECKED	CHECKED		APPROVED
Mike W.	Iris J.	Ella W.		Sam S.

FIRST ANGLE PROJECTION	SCALE	1
------------------------	-------	---

1.710.3570.1

PE
TRANSFORMERREV.
NO.

2