NO.
DWG.

ITEM	WEIGHT
TANK & ACCESSORIES	407lbs
TOTAL OIL WEIGHT	76gal
TOTAL WEIGHT	1730lbs

TECHNICAL DATA	
RATING	75kVA
PRIMARY VOLTAGE(V)	23900GRDY/13800
SECONDARY VOLTAGE(V)	240/120
FREQUENCY	60Hz
POLARITY	ADDITIVE
WINDING MATERIAL	AL
EFFICIENCY	98.84%
LOAD LOSS AT RATED VOLTAGE	≤920W
NO LOAD LOSSES	≤105W
IMPEDANCE	＞1.9%
OIL TYPE	FR3
COOLING CLASS	KNAN
ALTITUDE	≤1000m
No. OF TAP POSITION	5
COLOR	SEAFOAM GREEN Munsell7GY3.29/1.5

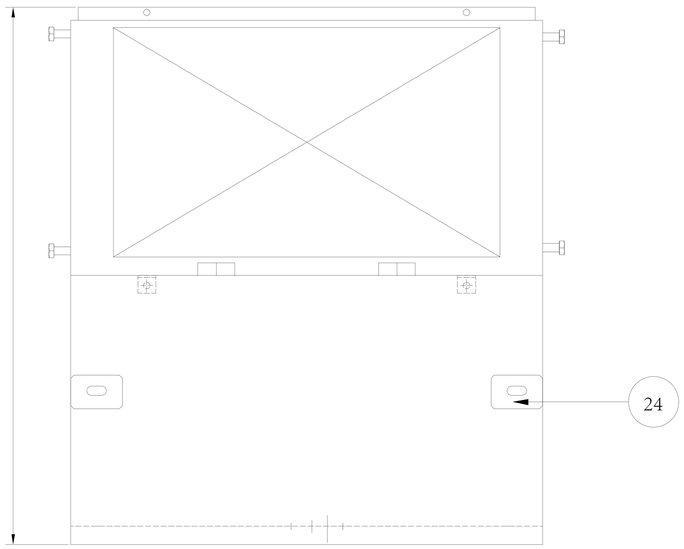

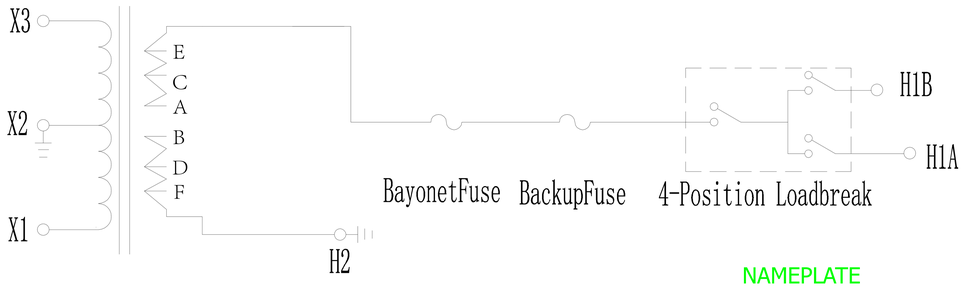

NAMEPLATE DETAIL

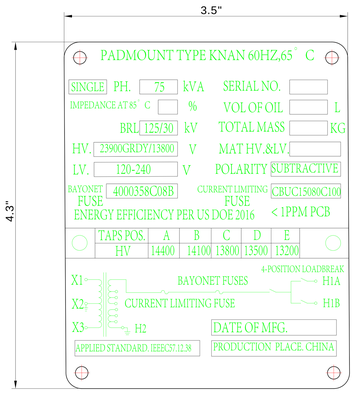

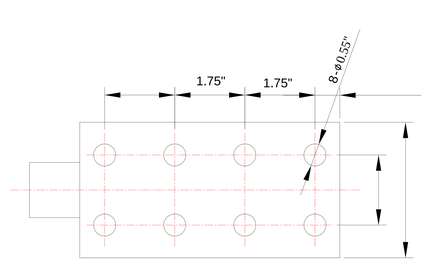

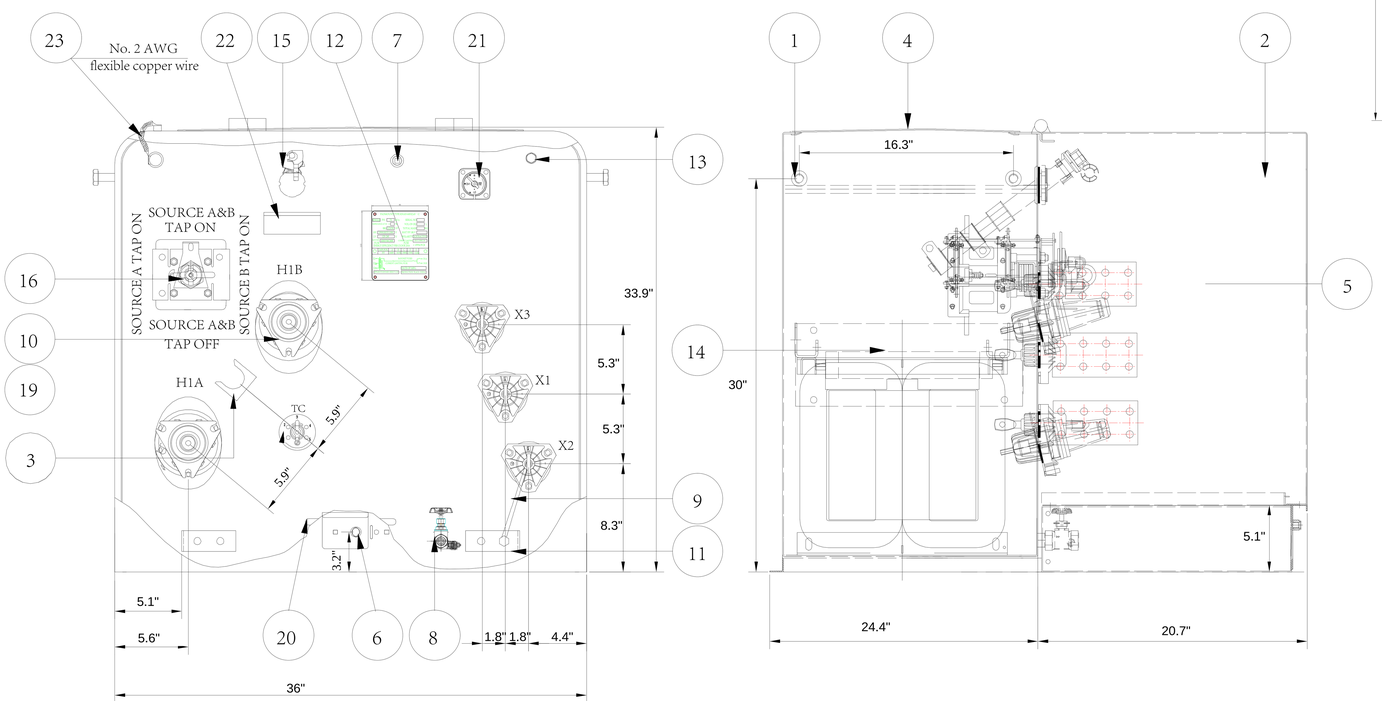

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	BOLT FOR LIFTING(M20 ×65)	4
2	HINGED DOOR	1
3	PARKING STAND BRACKET	1
4	FLIP TOP COVER	1
5	LV BUSHING (1.2 kV 630A-4 Hole)	3
6	PENTAHEAD BOLT ARRANGEMENT(STAINLESS STEEL)	1
7	FILL PLUG	1
8	1"DRAIN VALVE WITH 3/8" SAMPLER	1
9	GROUND STRAP COPPER	1
10	HV BUSHING WELL(25KV,200A)	2
11	GROUNDING SPADE TERMINAL	2
12	NAME PLATE(STAINLESS STEEL)	1
13	PRESSURE RELIEF VALVE	1
14	ELSP FUSE(CBUC15080C100)	1
15	BAYONET FUSE(4000358C08B)	1
16	FOUR POSITION LOADBREAKE SWITCH	1
17		
18	TC	1
19	INSERT WITH DUST CAP (25KV,200A)	2
20	GROUNDING BRACKET	1
21	OIL LEVEL GAUGE	1
22	DRIP TRAY	1
23	EQUIPOTENTIAL DEVICE(COPPER)	1
24	CLAMP	2

CHANGE

TYPE
ZGDL-H-75/23.9(13.8) /0.24(0.12)

DWG. NAME
General Assembly Drawing

DRAWN	CHECKED	CHECKED		APPROVED

FIRST ANGLE PROJECTION
SCALE 1

JIEZOU POWER

REV. NO.
0