



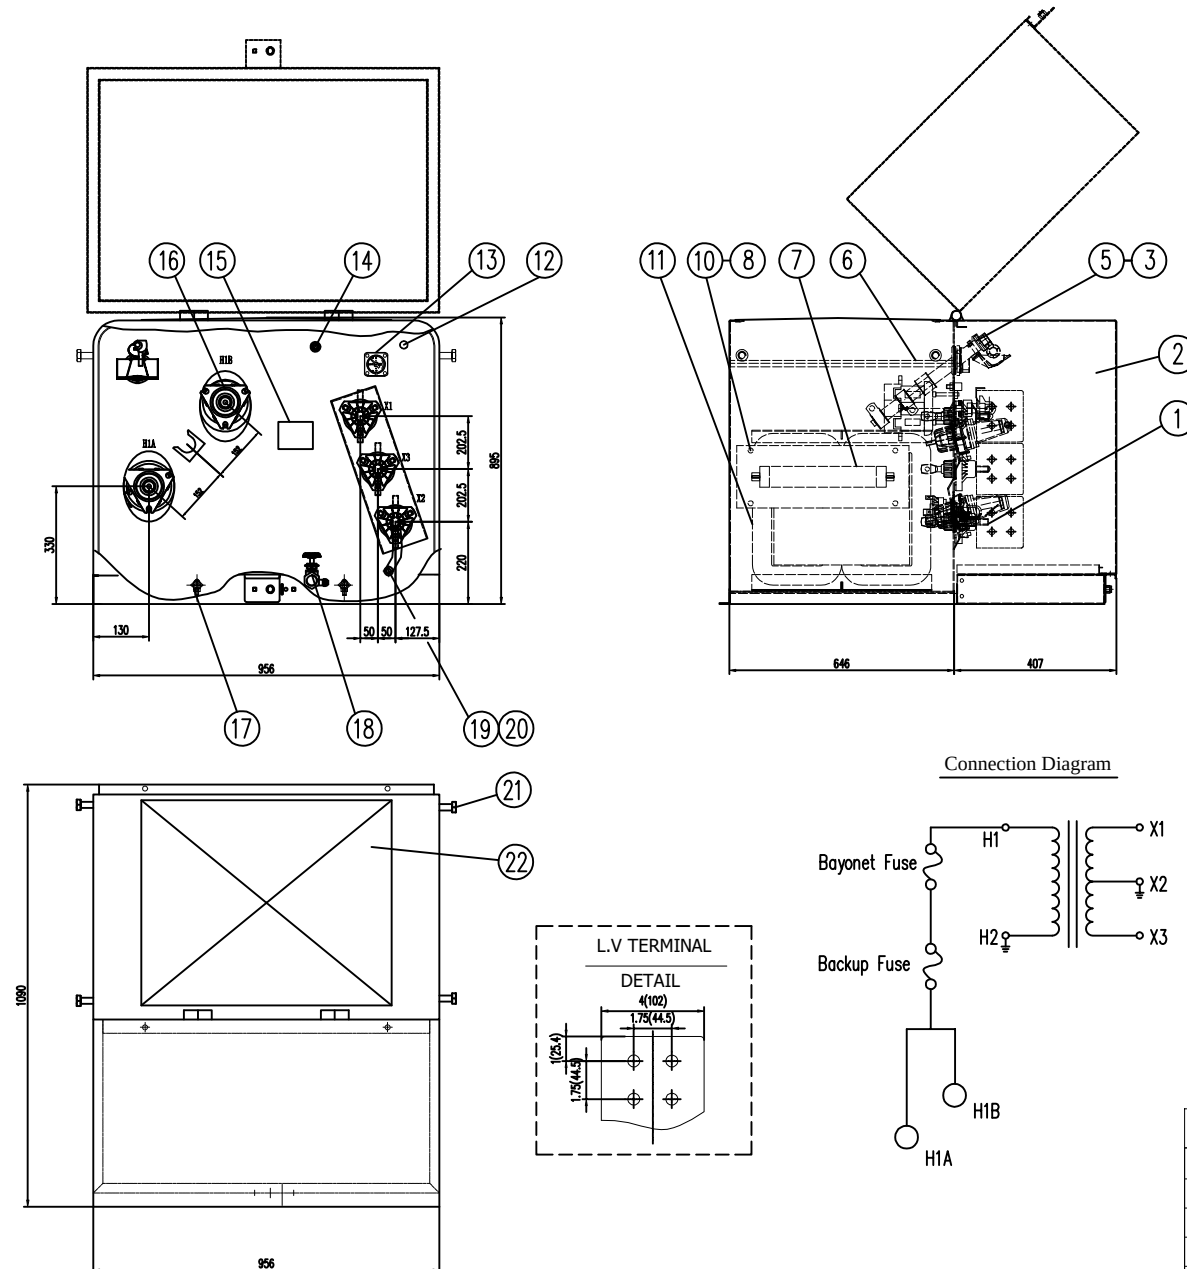

Connection Diagram

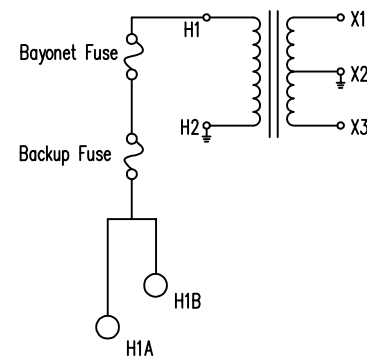

TECHNICAL DATA	
RATING	100kVA
PRIMARY VOLTAGE(V)	22860/13200
SECONDARY VOLTAGE(V)	120-240
INSULATION LEVEL(KV) H.V BIL	125
INSULATION LEVEL(KV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI0
CONDUCTOR	AL
INSULATING OIL	MINERAL NO PCB
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	1150W
NO LOAD LOSSES	150W
IMPEDANCE	1.8%
ALTITUDE	≤1000m
COLOR	Munsell Green 7GY 3.29/1.5

ITEM	WEIGHT
UNTANK WEIGHT	705 Lbs
TOTAL OIL WEIGHT	694 Lbs
TOTAL WEIGHT	1841 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	LV BUSHING	3
2	TANK	1
3	Bayonet Fuse	1
4	FUSE HOLDER	1
5	Drip Shield Assembly	1
6	Oil	
7	Backup Fuse	1
8	Fuse Assembly	1
9	Bolt	1
10	Washer	1
11	Core & Coil Assembly	1
12	PRESSURE RELIEF VALVE	1
13	OIL LEVEL GAUGE	1
14	Oil-in Plug	1
15	Nameplate	1
16	HV Bushing Base and terminal	2
17	Earth Terminal	1
18	Oil drain valve(Oil sampling valve)	1
19	BOIT FOR EARTH	1
20	COPPER STRIP	1
21	Bolt for lifting	4
22	Cover	1

S.NO	JZP.1PD.00100.13200					DESCRIPTION		
						JZP-100/13.2-0.12(0.24)		
						Pad-Mounted Transformer		
Remark	Time	Subarea	Alteration No.	Signation	Date	Phase Remark	Weight	Scale
Design		Mike	Standardize	Jack		A/0		
Date			Verify	Iris				
Check			Approve	Sam				
Craft			Date	2023. 10. 14		Total	No.	



JIEZOU POWER