


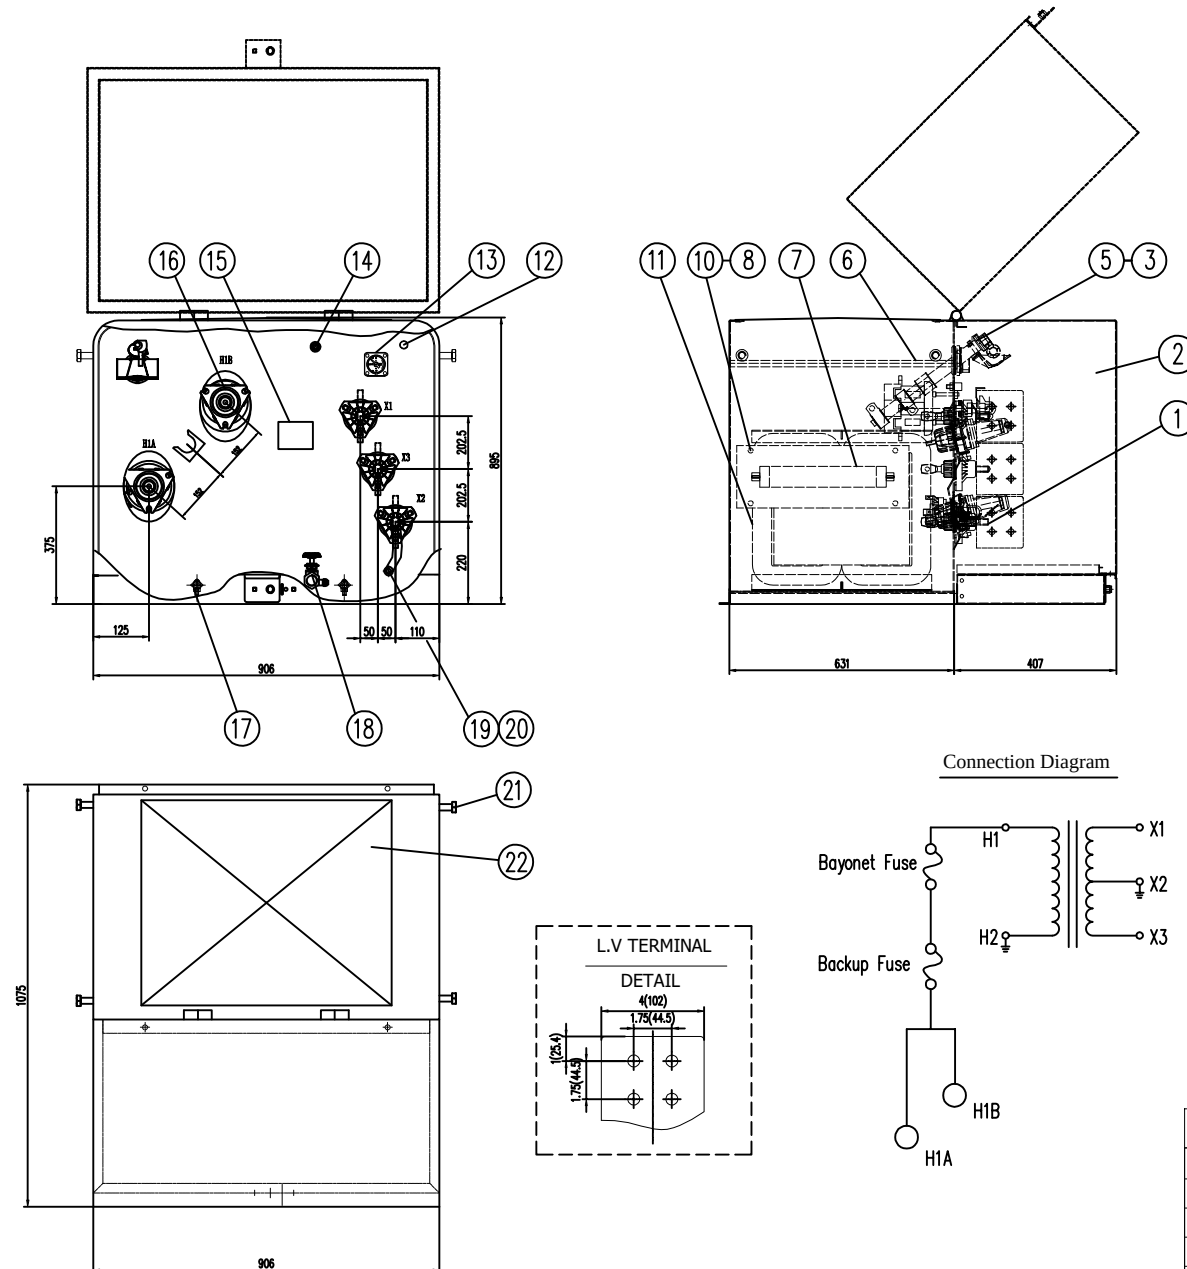

TECHNICAL DATA	
RATING	75kVA
PRIMARY VOLTAGE(V)	22860/13200
SECONDARY VOLTAGE(V)	120-240
INSULATION LEVEL(KV) H.V BIL	125
INSULATION LEVEL(KV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	L10
CONDUCTOR	AL
INSULATING OIL	MINERAL NO PCB
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	850W
NO LOAD LOSSES	130W
IMPEDANCE	1.8%
ALTITUDE	≤1000m
COLOR	Munsell Green 7GY 3.29/1.5

ITEM	WEIGHT
UNTANK WEIGHT	552 Lbs
TOTAL OIL WEIGHT	657 Lbs
TOTAL WEIGHT	1653 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	LV BUSHING	3
2	TANK	1
3	Bayonet Fuse	1
4	FUSE HOLDER	1
5	Drip Shield Assembly	1
6	Oil	
7	Backup Fuse	1
8	Fuse Assembly	1
9	Bolt	1
10	Washer	1
11	Core & Coil Assembly	1
12	PRESSURE RELIEF VALVE	1
13	OIL LEVEL GAUGE	1
14	Oil-in Plug	1
15	Nameplate	1
16	HV Bushing Base and terminal	2
17	Earth Terminal	1
18	Oil drain valve(Oil sampling valve)	1
19	BOIT FOR EARTH	1
20	COPPER STRIP	1
21	Bolt for lifting	4
22	Cover	1

S.NO	JZP.1PD.00075.13200					DESCRIPTION		
						JZP-75/13.2-0.12(0.24)		
						Pad-Mounted Transformer		
Remark	Time	Subarea	Alteration No.	Signation	Date	Phase Remark	Weight	Scale
Design		Mike	Standardize	Jack				
Date			Verify	Iris				
Check			Approve	Sam				
Craft			Date	2023. 10. 14		Total	No.	



JIEZOU POWER