



PIN	Signal	Farbe/ color Kabel Nr./ cable no.
A	U/ L1	1
B	V/ L2	2
C	W/ L3	3
⏏	PE	GNYE
3	24V	5
4	0V	6
1	1TP1	7
2	1TP2	8

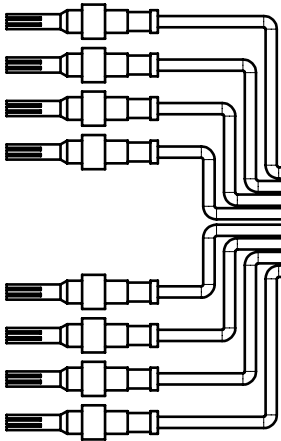

Äußerer und innere Schirme mit dem Steckergehäuse verbinden.
Connect shields with the plug.

Schirmverbindung nach Kapitel 2/ Shieldconnecting based on chapter 2 (TLB Kabelkonfektion)

LABEL

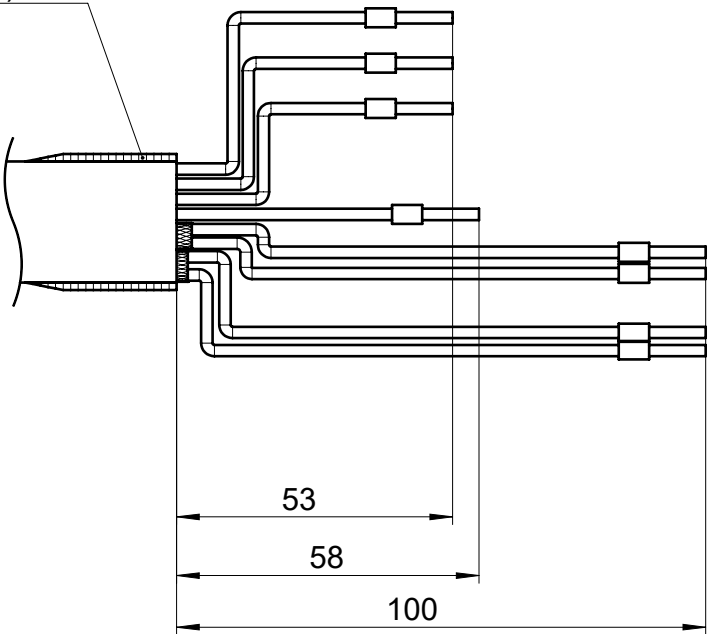

Clip-Nr./ -no.	Signal	Farbe/ color Kabel Nr./ cable no.
1	U/ L1	1
2	V/ L2	2
3	W/ L3	3
-	PE	GNYE
5	24V	5
6	0V	6
7	1TP1	7
8	1TP2	8

Leistungskabel/ Power Cable

Kabelaufbau/ Cable construction	(4x1.0+(2x0.50)+(2x0.34))mm²
Stöber - Teile Nr. Grundkabel Stober - part no. Basic cable	8TB2106.2010-00
Antriebsreglertyp (u. Größe) Drive controller (a. size)	SI6A/SC6A (BG0)

Anschluss/ Connection A

Kabelcode/ Cable code (SpeedTec)	LSI6H
Stecker (SpeedTec) Plug (SpeedTec)	A KU A 012 NN 00 40 0100 000
Buchsen- / Stiftkontakte Socket / Pin contact	4x 170359-1 4x 115677

Anschluss/ Connection B

Stecker Plug	Offene Enden mit Aderendhülsen open ends with ferrulles
-----------------	--



</