


B E I N S E N

Chicago

Plancha térmica eléctrica con plato extraíble

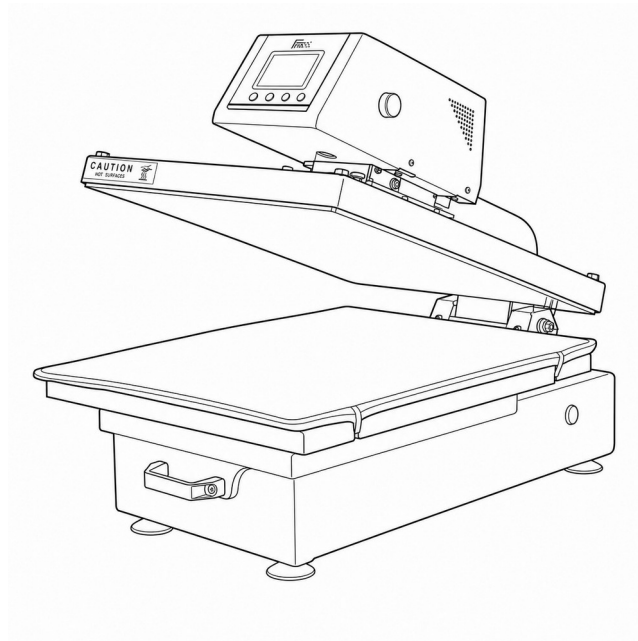

User Manual and Safety Instructions

Empowering Your Personalization Needs.

Index

01	Introduction and equipment description	3
02	Technical specifications	4
03	Critical safety	5
04	Operation guide	7
05	Maintenance and troubleshooting	9
06	Legal notice and trademarks	11

Page numbers are indicative and may vary slightly depending on the specific length of the sections for this model.

01

Introduction and Equipment Description

The Beinsen Chicago is an automatic heat press with 40 × 50 cm plate and electromagnetic opening. Discontinued model: the manual is provided exclusively for owners of existing units. For new acquisitions, consult equivalent models in the current catalogue.

Applications

Sublimation, HTV vinyl, DTF and transfer on T-shirts, sweatshirts, cushions, tote bags and flat substrates. Discontinued model — this manual is supplied exclusively for owners of existing units.

Main components

- Upper heating plate fijo
- Pull-out lower plate on rails
- Lever arm for manual closing
- digital controller frontal
- Pressure regulator via upper hand wheel
- Industrial metal Beinsen orange frame



Fig. 1 · Main components of the Beinsen Chicago.

02

Technical Specifications

Model	Chicago
Press Type	Sandwich con plato extraíble
Operating mode	Manual
Opening Angle	45°
Display model	digital controller
Touch screen	No
Memory slots	No
Timer range	0 – 99 seg.
Number of plates	1
Plate size	40 × 50 cm
Interchangeable plates	No
Power	1.800 W
Maximum Temperature	225 °C
Voltage	220 V
Net weight	42 kg
Gross weight	51 kg
Machine size	85 × 50 × 50 cm
Stand	Not included

Technical specifications may vary slightly depending on the manufacturing batch configuration. Refer to the equipment identification label for the exact data of your unit.

03

Critical Safety

Read all warnings carefully before operating the equipment. Failure to follow these instructions may result in serious injury, property damage or void the warranty.

Risk of burns

The upper plate reaches 225 °C. Pulling out the lower plate notably reduces the risk of burns when placing the garment, but the upper plate stays hot during the cycle. Always use thermal gloves.

Pull-out plate

Check that the plate is correctly positioned on its rails before starting closing. Lubricate the rails periodically to ensure smooth sliding.

Electrical risk

Connect the equipment only to a grounded socket. Do not handle the equipment with wet hands and disconnect it before any cleaning operation.

Lever arm

Operate the lever arm firmly but smoothly. Do not force the system if you notice unusual resistance.

04

Operation Guide

The digital controller lets you configure the press temperature and time. The equipment has a pull-out lower plate to make placing the garment away from the hot area easier.

Power-on and configuration

- 01 Connect the equipment to the mains and turn on the main switch.
- 02 The controller display will light up showing the temperature reading.
- 03 Press SET to enter the configuration menu.
- 04 Adjust the target temperature with the (+) and (–) buttons.
- 05 Press SET again to move to time setting and configure it the same way.
- 06 Press SET to confirm and exit the menu.
- 07 Wait until the upper plate reaches the target temperature.

Pressing process with pull-out plate

- 01 Pull out the lower plate towards you until it stops.
- 02 Place the garment or substrate on the plate, well stretched.
- 03 Apply the transfer paper with the printed side facing the fabric.
- 04 Cover with a Teflon sheet to protect the garment and the upper plate.
- 05 Return the plate to its working position by pushing it to the end stop.
- 06 Close the equipment by lowering the lever arm to its stop.
- 07 The timer will start when closing is detected.
- 08 When the alarm sounds, raise the lever arm and pull out the plate again.
- 09 Remove the substrate and peel off the transfer paper as instructed by the manufacturer.

05

Maintenance and Troubleshooting

Preventive maintenance

- Before each shift, check that both plates are clean and free of debris.
- Clean the plates while warm using a thermal glove and a microfibre cloth. Never use water or abrasive products.
- Lubricate the pull-out plate rails with high-temperature grease when you notice sliding resistance.
- Periodically inspect the pressure regulator and the integrity of the lever arm.
- Check the temperature reading with an independent contact thermometer if you notice inconsistency.
- Request a full inspection of the equipment from an Official Technical Service authorised by Beinsen at least once a year.

Troubleshooting

Problem	Probable cause	Solution
The display does not turn on	Loose power cable	Check the connection and socket. If it persists, contact Beinsen Technical Service.
The pull-out plate gets stuck	Dry rails or accumulated debris	Clean with a dry cloth and lubricate with high-temperature grease.
The lever arm is hard to close	Misplaced plate or excessive pressure	Check that the plate is in its working position. Reduce the pressure with the regulator.
Slower heating than usual	Insufficient supply voltage	Check the supply voltage.
Marks or uneven transfer	Dirty plate or missing Teflon	Clean the plate and use intermediate Teflon.

To report any issue, request a repair or purchase genuine spare parts, contact exclusively an Official Technical Service authorized by Beinsen.

06

Legal Notice and Trademarks

Copyright

Copyright © 2025 Beinsen. This guide is protected by international copyright laws. No part of this guide may be reproduced, distributed, translated or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording or any information storage and retrieval system, without the prior written consent of Beinsen.

Trademarks

Beinsen and the Beinsen logo are registered trademarks. All other trademarks and copyrights mentioned in this document are the property of their respective owners.

Warranty and technical service

To report any issue, request a repair or purchase genuine spare parts, contact exclusively an Official Technical Service authorized by Beinsen. Find the nearest technical service point through the official website.

Contact

Beinsen

Avenida Alto de las Atalayas, 18 · 30110 Cabezo de Torres (Murcia), Spain
+34 968 902 300 · info@beinsen.com · beinsen.com