1. Description

1.1. Project

Project Name	Coupe_2017
Board Name	STM32F411E-DISCO
Generated with:	STM32CubeMX 4.15.1
Date	07/24/2016

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411VETx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration
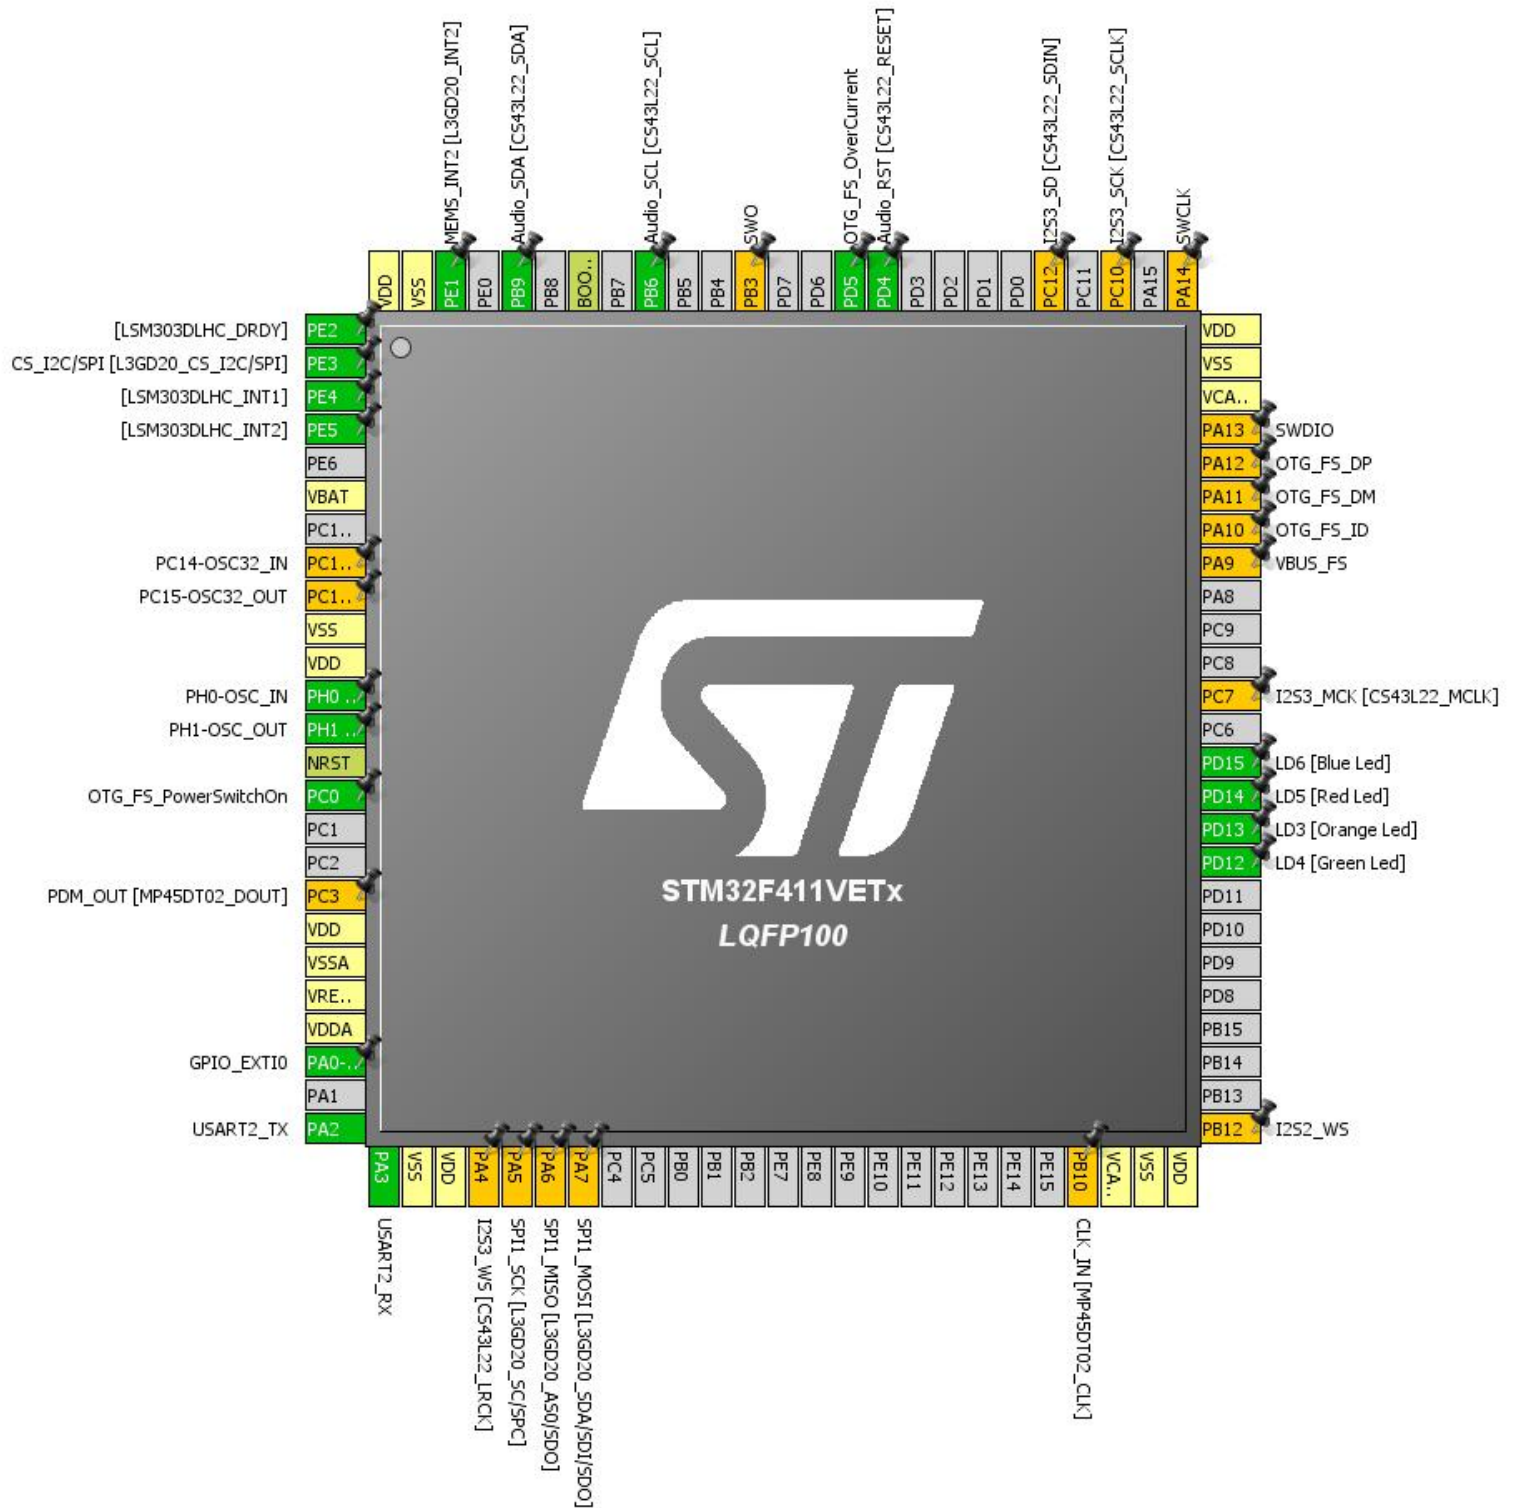
3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2 *	I/O	GPIO_Input	[LSM303DLHC_DRDY]
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
3	PE4	I/O	GPIO_EXTI4	[LSM303DLHC_INT1]
4	PE5	I/O	GPIO_EXTI5	[LSM303DLHC_INT2]
6	VBAT	Power		
8	PC14-OSC32_IN **	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT **	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0 - OSC_IN	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
15	PC0 *	I/O	GPIO_Output	OTG_FS_PowerSwitchOn
18	PC3 **	I/O	I2S2_SD	PDM_OUT [MP45DT02_DOUT]
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	GPIO_EXTI0	
25	PA2	I/O	USART2_TX	
26	PA3	I/O	USART2_RX	
27	VSS	Power		
28	VDD	Power		
29	PA4 **	I/O	I2S3_WS	I2S3_WS [CS43L22_LRCK]
30	PA5 **	I/O	SPI1_SCK	SPI1_SCK [L3GD20_SC/SPC]
31	PA6 **	I/O	SPI1_MISO	SPI1_MISO [L3GD20_AS0/SDO]
32	PA7 **	I/O	SPI1_MOSI	SPI1_MOSI [L3GD20_SDA/SDI/SDO]
47	PB10 **	I/O	I2S2_CK	CLK_IN [MP45DT02_CLK]
48	VCAP1	Power		
49	VSS	Power		
50	VDD	Power		
51	PB12 **	I/O	I2S2_WS	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14 *	I/O	GPIO_Output	LD5 [Red Led]
62	PD15 *	I/O	GPIO_Output	LD6 [Blue Led]
64	PC7 **	I/O	I2S3_MCK	I2S3_MCK [CS43L22_MCLK]
68	PA9 **	I/O	USB_OTG_FS_VBUS	VBUS_FS
69	PA10 **	I/O	USB_OTG_FS_ID	OTG_FS_ID
70	PA11 **	I/O	USB_OTG_FS_DM	OTG_FS_DM
71	PA12 **	I/O	USB_OTG_FS_DP	OTG_FS_DP
72	PA13 **	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14 **	I/O	SYS_JTCK-SWCLK	SWCLK
78	PC10 **	I/O	I2S3_CK	I2S3_SCK [CS43L22_SCLK]
80	PC12 **	I/O	I2S3_SD	I2S3_SD [CS43L22_SDIN]
85	PD4 *	I/O	GPIO_Output	Audio_RST [CS43L22_RESET]
86	PD5 *	I/O	GPIO_Input	OTG_FS_OverCurrent
89	PB3 **	I/O	SYS_JTDO-SWO	SWO
92	PB6	I/O	I2C1_SCL	Audio_SCL [CS43L22_SCL]
94	BOOT0	Boot		
96	PB9	I/O	I2C1_SDA	Audio_SDA [CS43L22_SDA]
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [L3GD20_INT2]
99	VSS	Power		
100	VDD	Power		

 * The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration
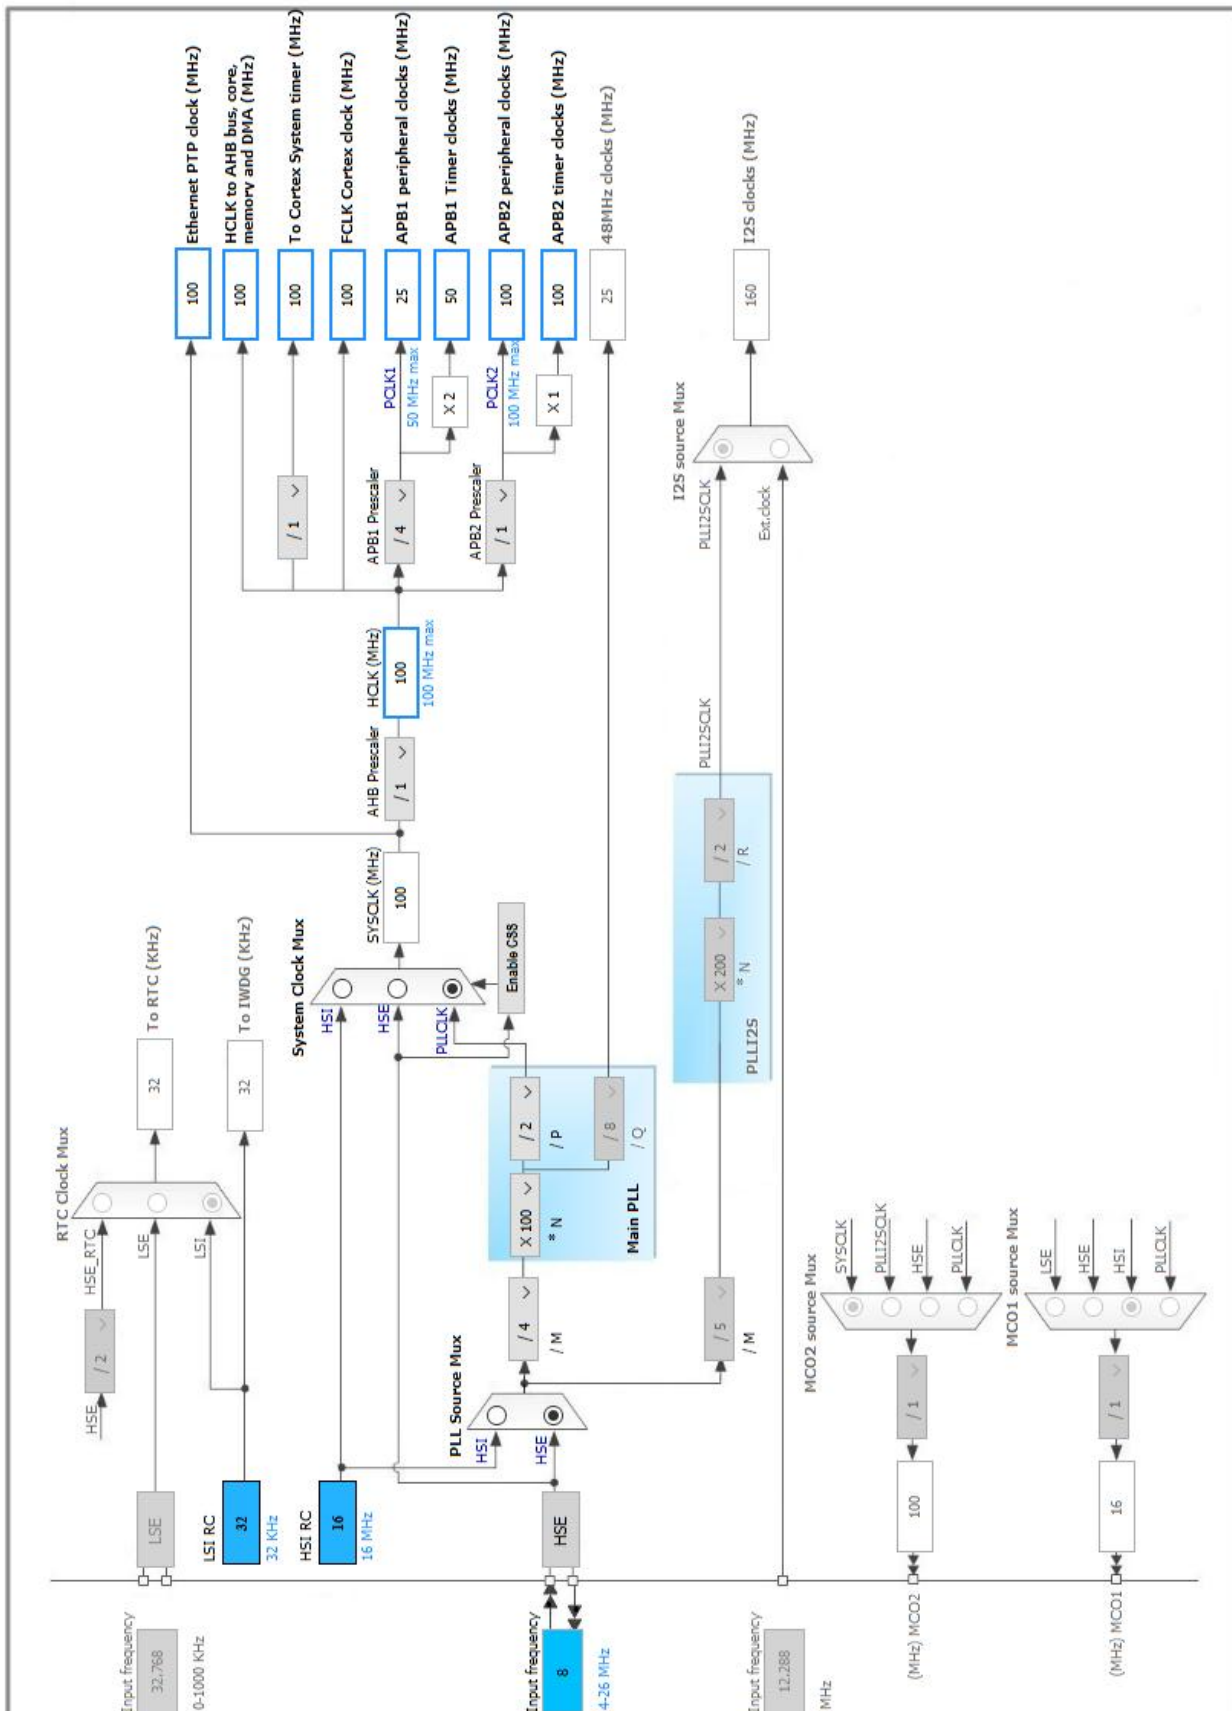
5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

5.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	3 WS (4 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulatror Voltage Scale	Power Regulator Voltage Scale 1

5.3. SYS

Timebase Source: SysTick

5.4. USART2

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	Low	Audio_SCL [CS43L22_SCL]
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	Low	Audio_SDA [CS43L22_SDA]
RCC	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	**Very High** *	
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	**Very High** *	
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	PC15-OSC32_OUT
	PC3	I2S2_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	PDM_OUT [MP45DT02_DOUT]
	PA4	I2S3_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_WS [CS43L22_LRCK]
	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	SPI1_SCK [L3GD20_SC/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	SPI1_MISO [L3GD20_AS0/SDO]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	SPI1_MOSI [L3GD20_SDA/SDI/SDO]
	PB10	I2S2_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	CLK_IN [MP45DT02_CLK]
	PB12	I2S2_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PC7	I2S3_MCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_MCK [CS43L22_MCLK]
	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	VBUS_FS
	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	OTG_FS_ID

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	OTG_FS_DM
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	**Very High** *	OTG_FS_DP
	PA13	SYS_JTMS-SWDIO	n/a	n/a	**n/a**	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	**n/a**	SWCLK
	PC10	I2S3_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SCK [CS43L22_SCLK]
	PC12	I2S3_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SD [CS43L22_SDIN]
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PE2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	[LSM303DLHC_DRDY]
	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
	PE4	GPIO_EXTI4	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	[LSM303DLHC_INT1]
	PE5	GPIO_EXTI5	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	[LSM303DLHC_INT2]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OTG_FS_PowerSwitchOn
	PA0-WKUP	GPIO_EXTI0	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5 [Red Led]
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6 [Blue Led]
	PD4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Audio_RST [CS43L22_RESET]
	PD5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	OTG_FS_OverCurrent
	PE1	GPIO_EXTI1	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	MEMS_INT2 [L3GD20_INT2]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
USART2 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411VETx
Datasheet	026289_Rev4

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	Coupe_2017
Project Folder	C:\Users\guill\Coupe2017\Coupe2017\Coupe_2017
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.12.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No