# Micro Teleinfo

# Factory Settings

# Procedure

**Version 1.1**

28/03/2026

## WCH USB Flasher tool

To program Micro Teleinfo module you need to install USB CH9102 Flasher tool, this tool can be downloaded here

http://www.wch-ic.com/downloads/CH34xSerCfg_ZIP.html

This procedure has been made with version 1.2 of the tool, latest as today is V1.5 but has not been tested/validated yet, so to be sure, use V1.2 version

Once installed you can launch the Flasher tool, you should get a screen like following:

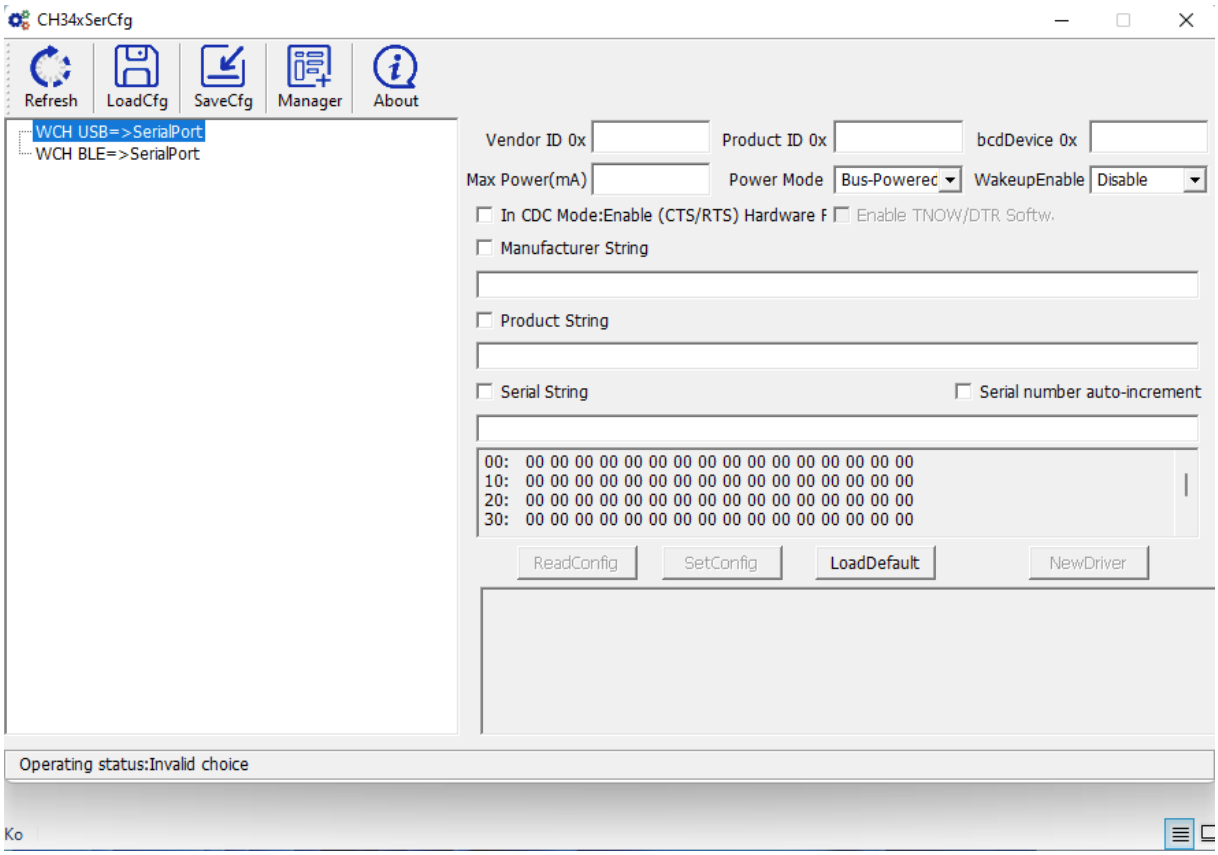

## USB connection

Connect the PCB board to your computer using USB Data cable (we suggest using USB hub to speed up flashing process.

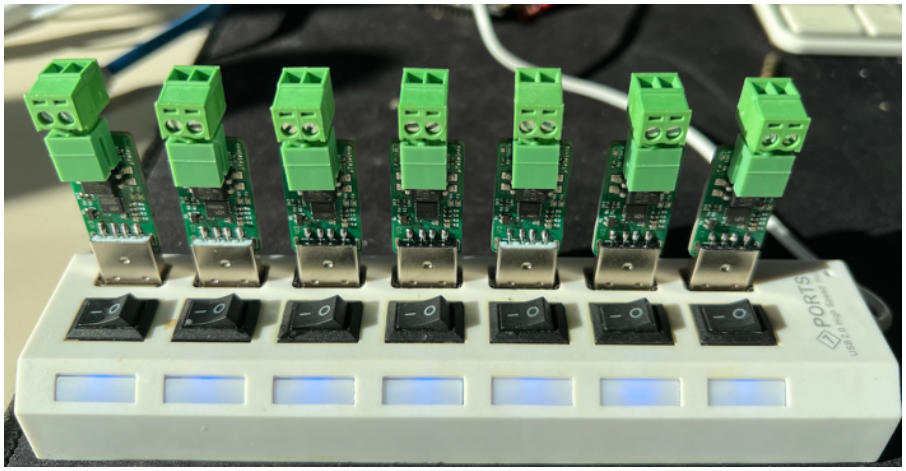

Once connected you should see a new CH9102F devices in the application.

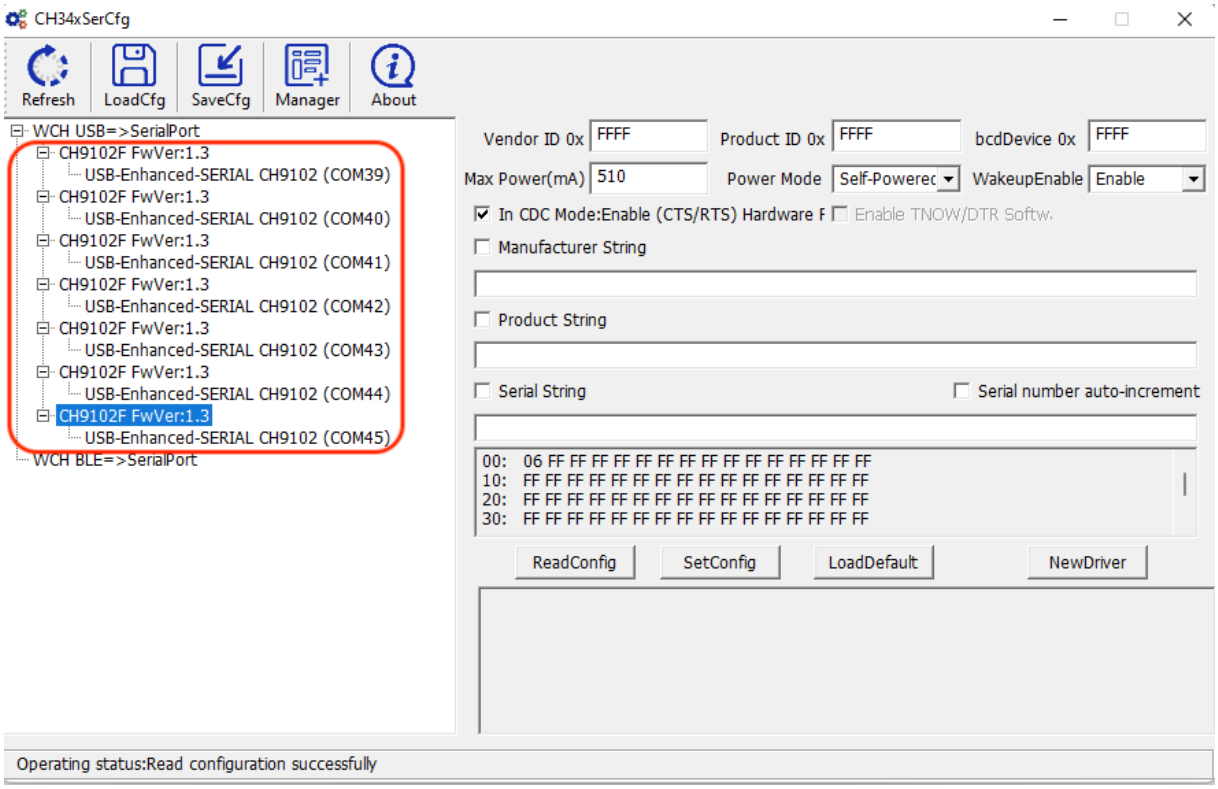

Select the 1st one and click on LOADCFG, select config file CH9102F-CH2I.CFG sent by CH2i:

1) Verify that all the parameters are correct as follow
2) Serial String is the only parameter that change for each device

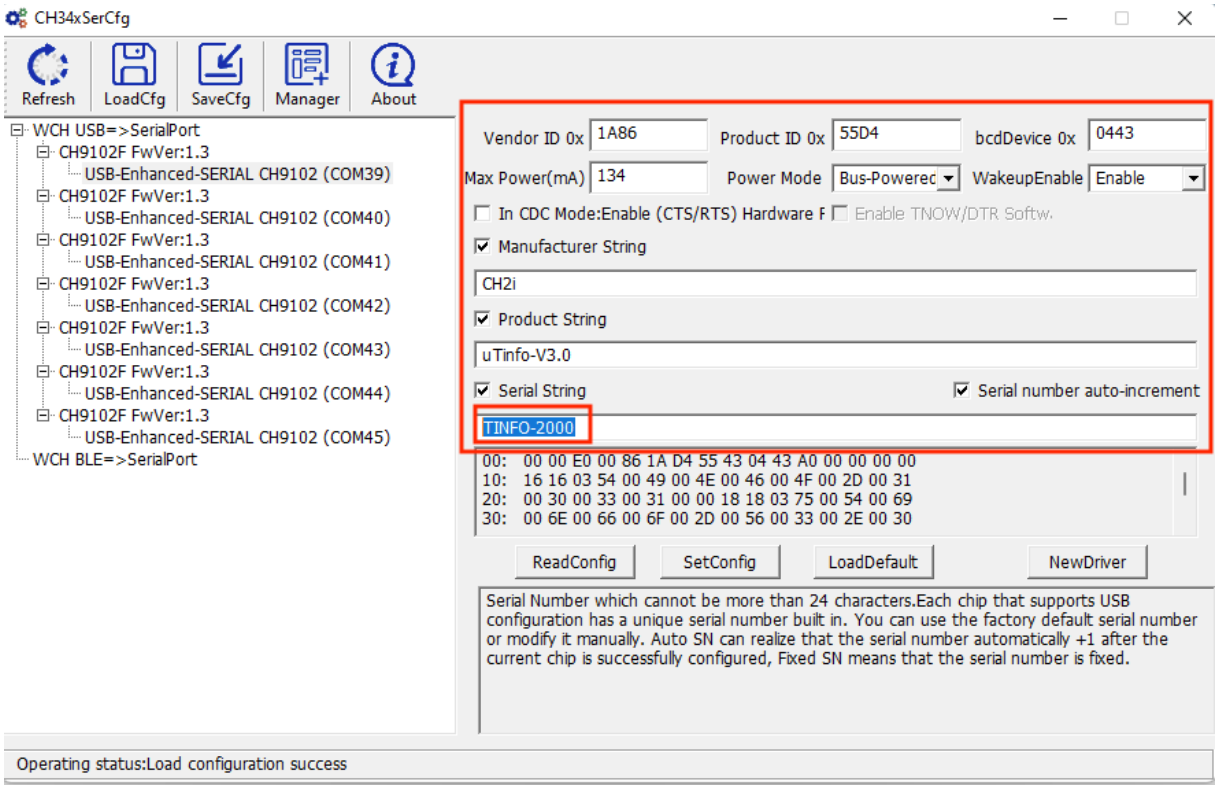


Each device needs to have it own serial number starting at 2500 with the following names

TINFO-2500, TINFO-2501, …, TINFO-2249

Once done click on **SETCONFIG** and once done you need to select next device, but parameters are removed when changing device so after selecting new device, you need to click on **LOADCFG** button again and manually change Serial String incrementing to +1

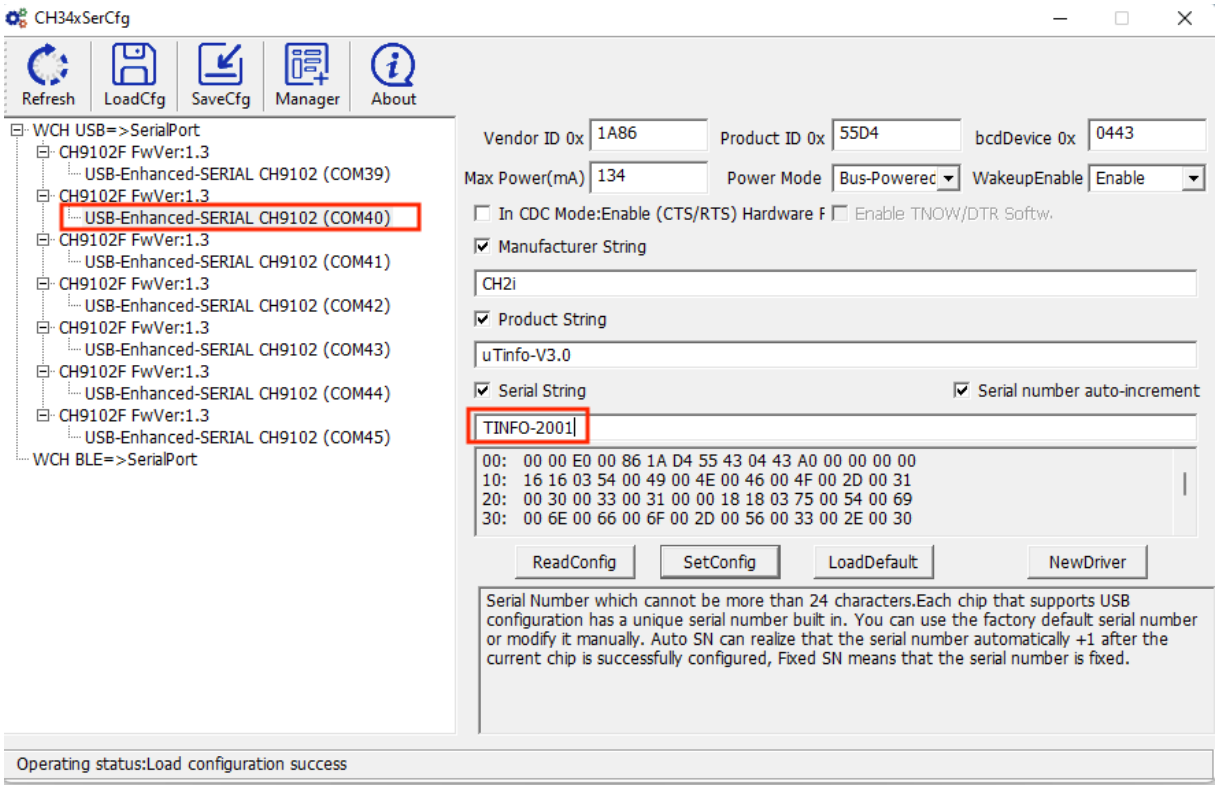


TIP : when checking Serial Number auto increment, after programming one module Serial number is incremented buy you need to save config (click on **SAVECFG**) selecting yes when asked to replace old file. Then you can select next module and click on **LOADCFG** and Serial Number will be the correct one.