

D

C

B

A




NOTES:
1. Part number corresponds to McMaster-Carr Catalog Number #2122N11 for reference as per the McMaster-Carr catalog.

2. Grease all mounting with LB 8700 or equivalent when assembly. Ensure proper lubrication to prevent corrosion and wear.


3. Equivalent vendors are accepted by approval. Follow the bearing trade number R12 with the following specifications:
- ID: 0.75 in
- OD (Outer Diameter): 1.625 in
- Width: 5/16 in

4. Tolerance specifications for alternative bearings:
- ID (Inner Diameter) Tolerance: -0.0004" to 0"
- OD (Outer Diameter) Tolerance: -0.0005" to 0"
- Width Tolerance: -0.005" to 0"

5. All sealings to be inspected for dimensional accuracy and smooth rotation before assembly.

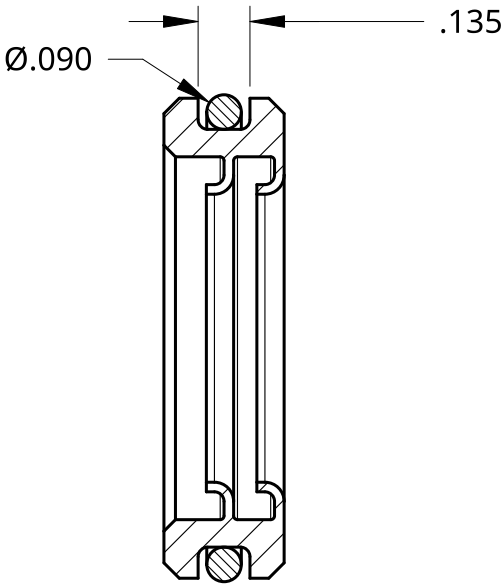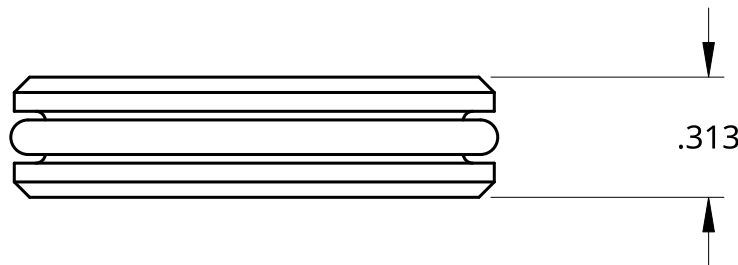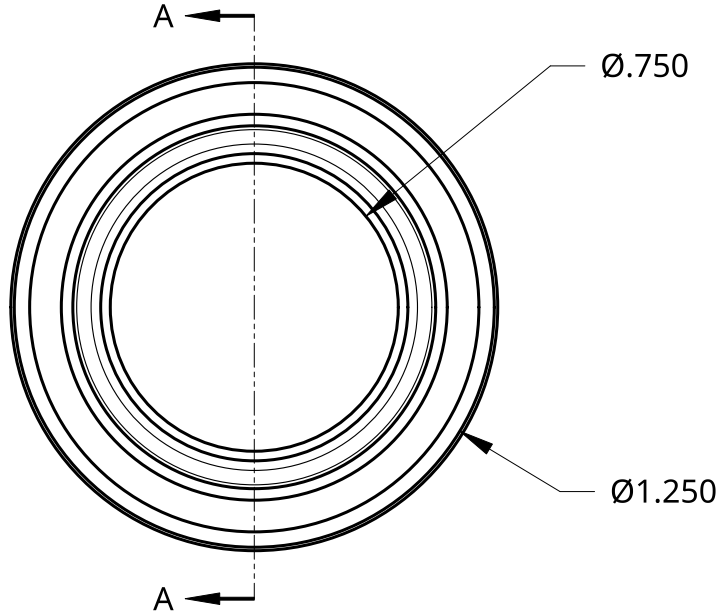

SECTION A - A

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES .XX = ±.05 .XXX = ±.002 ANGULAR = ± ° .XXXX = ±.0001 FRACTIONAL = ± SURFACE FINISH 		NAME	DATE	TITLE Shaft Sealing			
		DRAWN	JAMES ZHANG				12/05/2024
		CHECKED					
		APPROVED	JZ				12/05/2024
DO NOT SCALE DRAWING					SIZE B		
BREAK ALL SHARP EDGES AND REMOVE BURRS							
THIRD ANGLE PROJECTION		MATERIAL		FINISH		DWG NO. OTS-000005	
		PTFE Plastic					
						REV. 	
				SCALE 2:1	WEIGHT	SHEET 1 of 1	

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
00	Initial Sealing Selection	12/7/2024	JZ

D

C

B

A