

Transport Layer



Anand Baswade
anand@iitbhilai.ac.in

TCP round trip time, timeout

Q: how to set TCP timeout value?

- longer than RTT, but RTT varies!
- *too short*: premature timeout, unnecessary retransmissions
- *too long*: slow reaction to segment loss


Q: how to estimate RTT?

- *SampleRTT*: measured time from segment transmission until ACK receipt
 - ignore retransmissions
- *SampleRTT* will vary, want estimated RTT “smoother”
 - average several *recent* measurements, not just current *SampleRTT*

TCP round trip time, timeout

$$\text{EstimatedRTT} = (1 - \alpha) * \text{EstimatedRTT} + \alpha * \text{SampleRTT}$$

- exponential weighted moving average (EWMA)
- influence of past sample decreases exponentially fast
- typical value: $\alpha = 0.125$

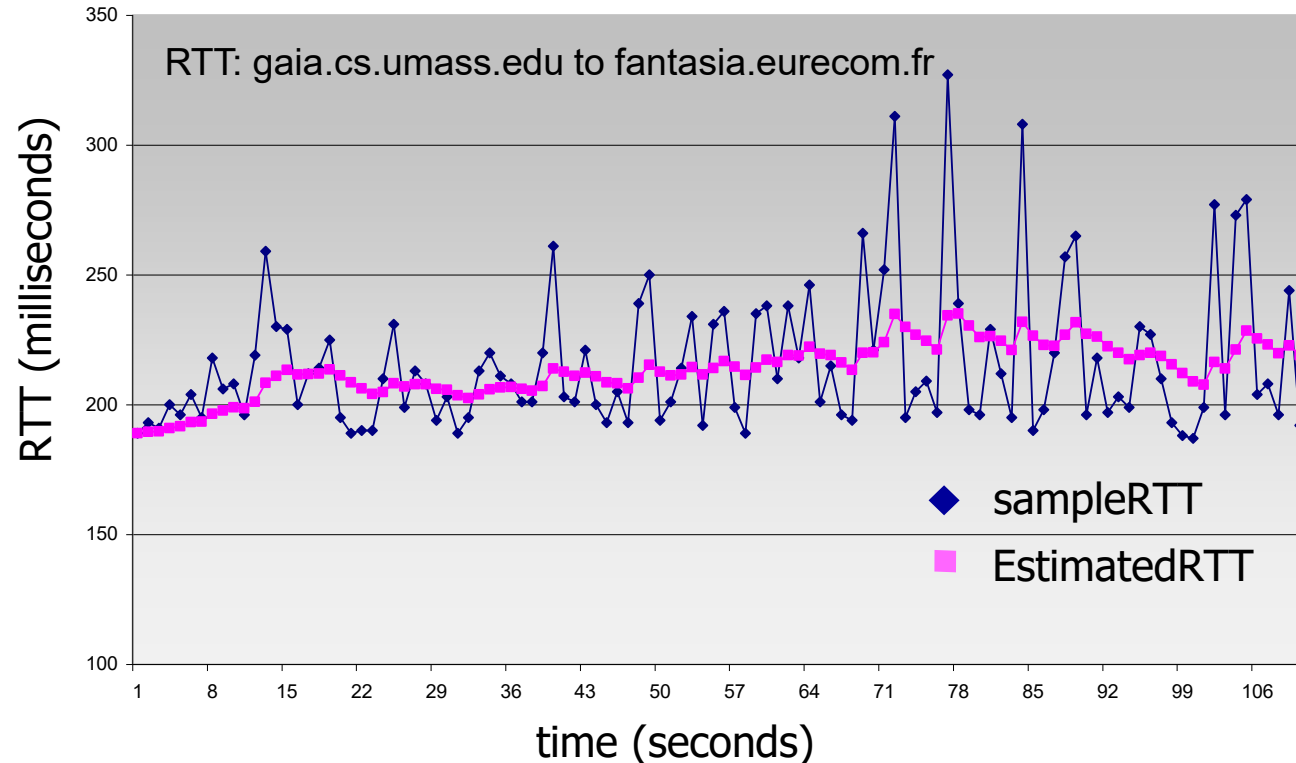

TCP round trip time, timeout

- timeout interval: **EstimatedRTT** plus “safety margin”
 - large variation in **EstimatedRTT**: want a larger safety margin

$$\text{TimeoutInterval} = \text{EstimatedRTT} + 4 * \text{DevRTT}$$



↑
estimated RTT

↑
“safety margin”


- **DevRTT**: EWMA of **SampleRTT** deviation from **EstimatedRTT**:

$$\text{DevRTT} = (1 - \beta) * \text{DevRTT} + \beta * |\text{SampleRTT} - \text{EstimatedRTT}|$$

(typically, $\beta = 0.25$)


TCP flow control

Q: What happens if network layer delivers data faster than application layer removes data from socket buffers?

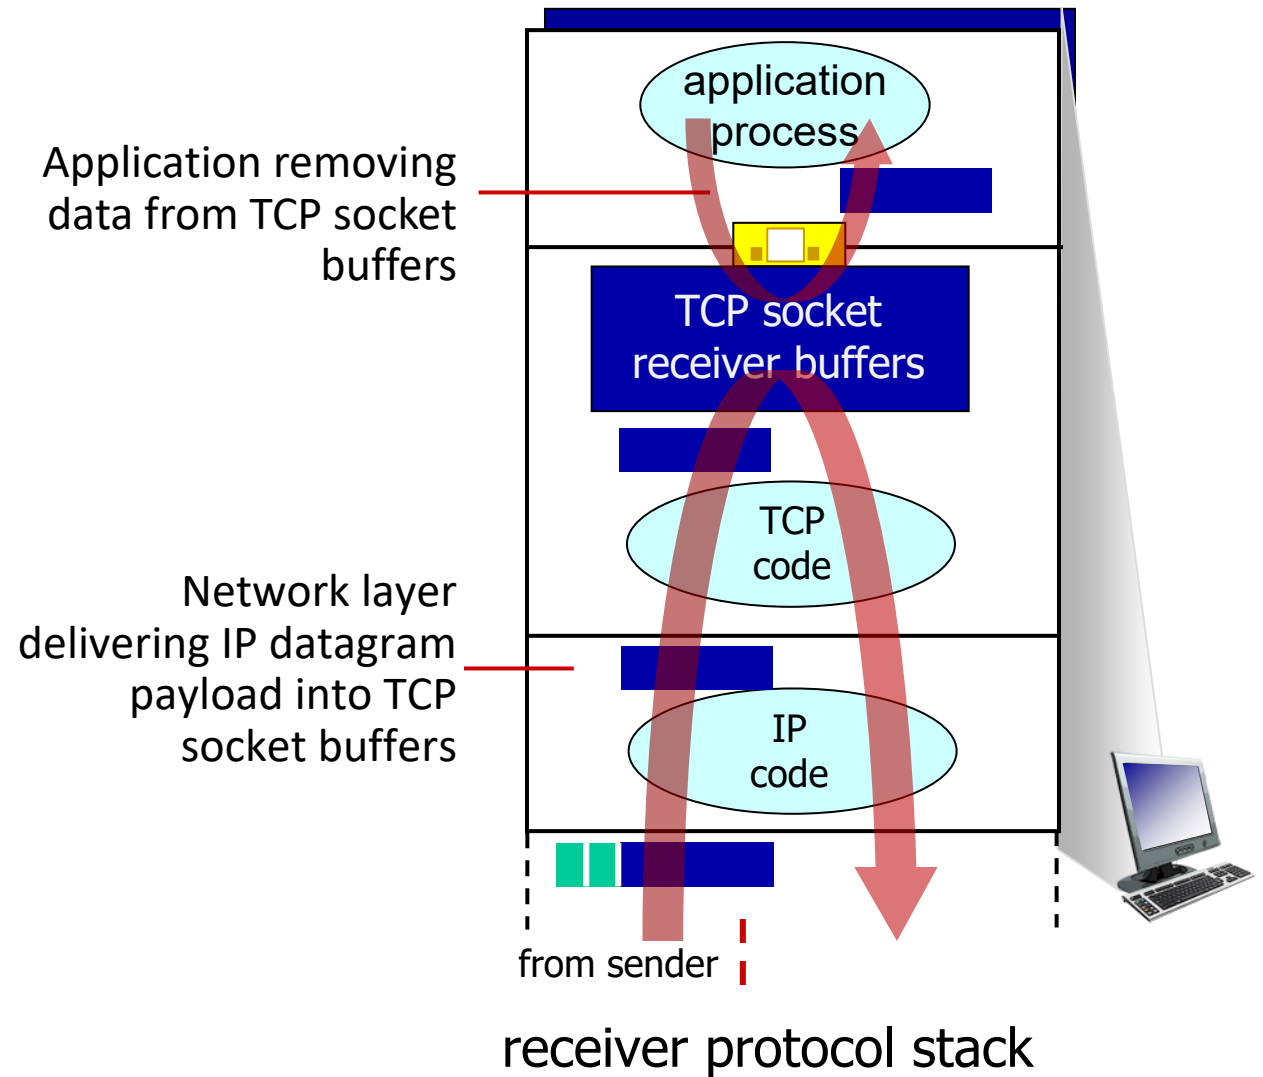


TCP flow control

Q: What happens if network layer delivers data faster than application layer removes data from socket buffers?

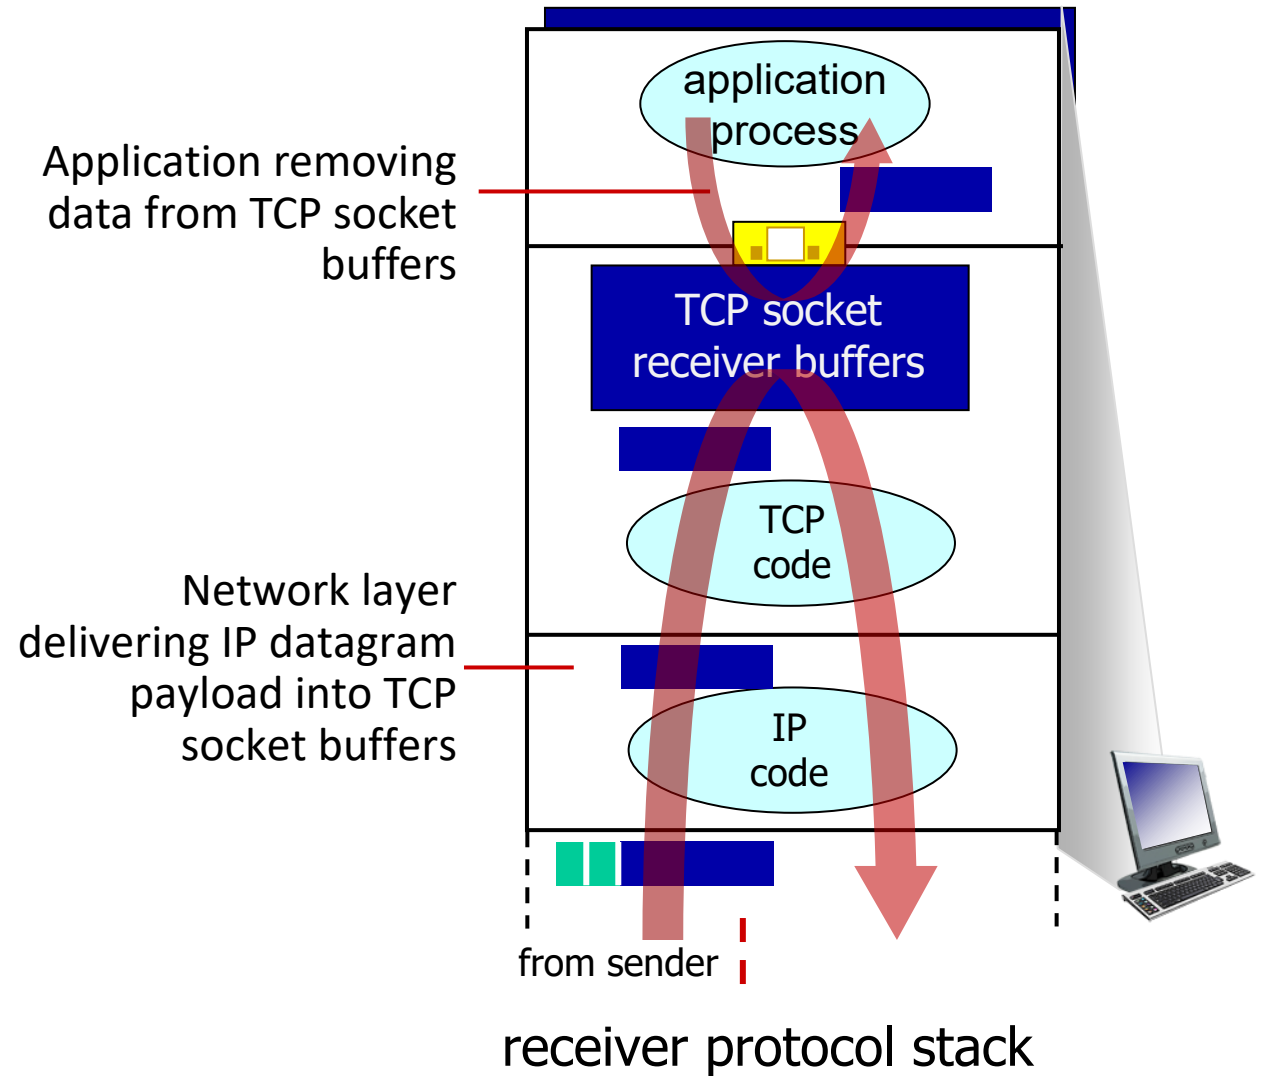


TCP flow control

Q: What happens if network layer delivers data faster than application layer removes data from socket buffers?

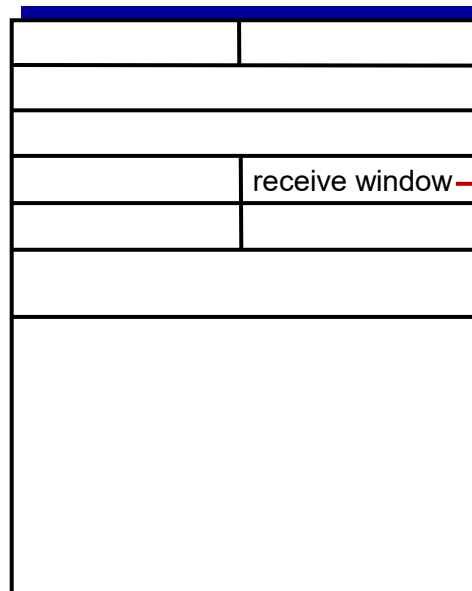

flow control: # bytes
receiver willing to accept

Application removing
data from TCP socket
buffers

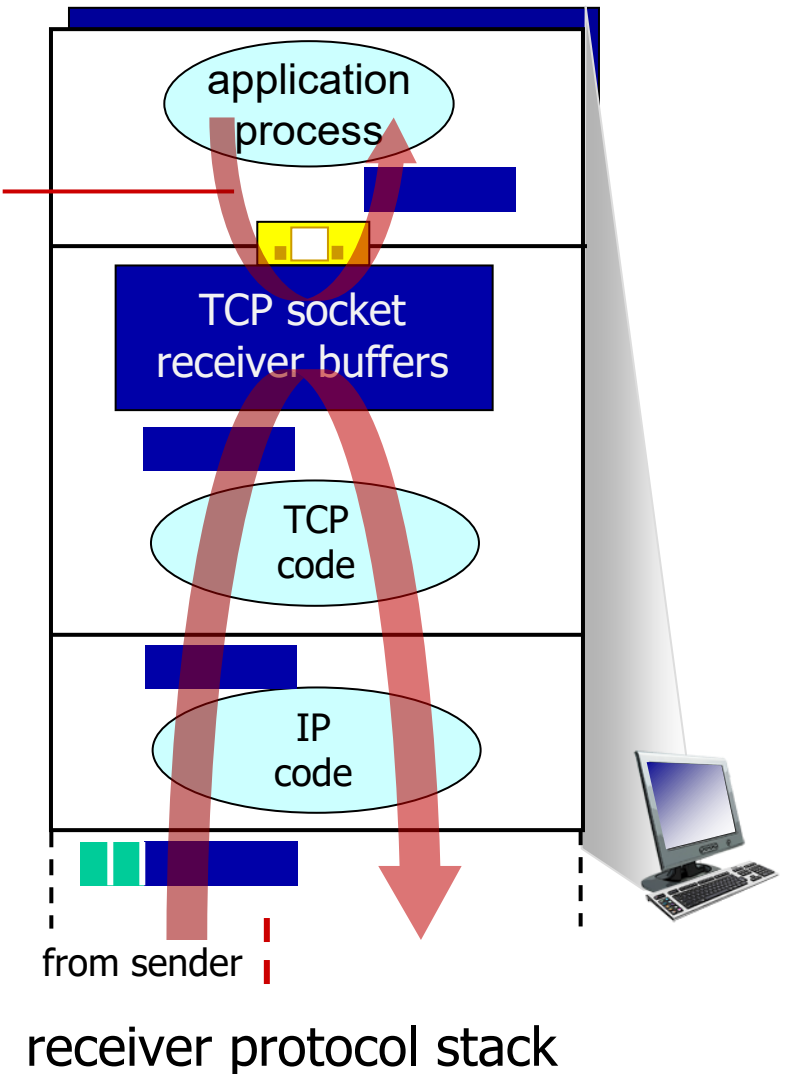


TCP flow control

Q: What happens if network layer delivers data faster than application layer removes data from socket buffers?


—flow control—

receiver controls sender, so sender won't overflow receiver's buffer by transmitting too much, too fast

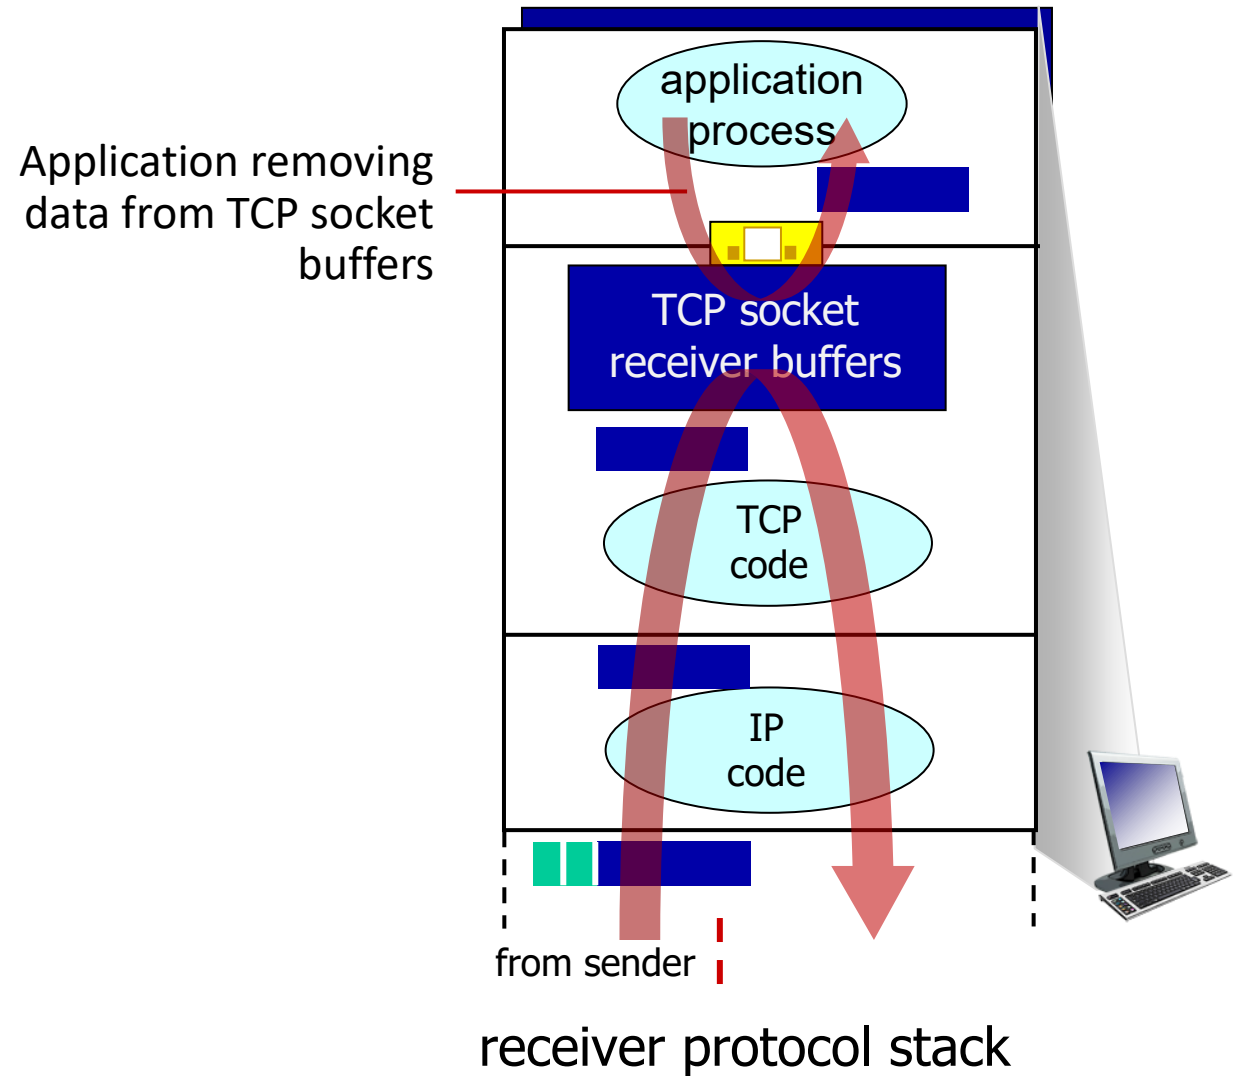

TCP flow control

- TCP receiver “advertises” free buffer space in **rwnd** field in TCP header
 - **RcvBuffer** size set via socket options (typical default is 4096 bytes)
 - many operating systems autoadjust **RcvBuffer**
- guarantees receive buffer will not overflow

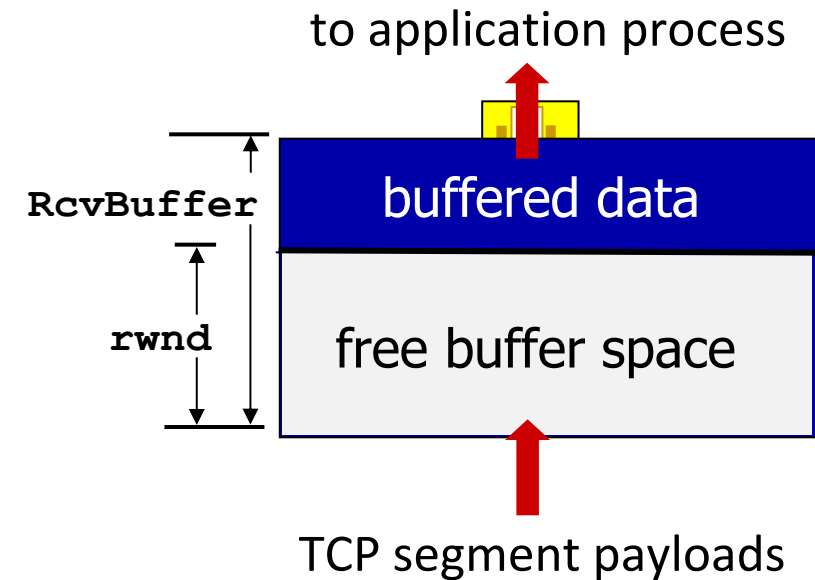


TCP receiver-side buffering

TCP flow control

- TCP receiver “advertises” free buffer space in **rwnd** field in TCP header
 - **RcvBuffer** size set via socket options (typical default is 4096 bytes)
 - many operating systems autoadjust **RcvBuffer**
- sender limits amount of unACKed (“in-flight”) data to received **rwnd**
- guarantees receive buffer will not overflow


flow control: # bytes receiver willing to accept

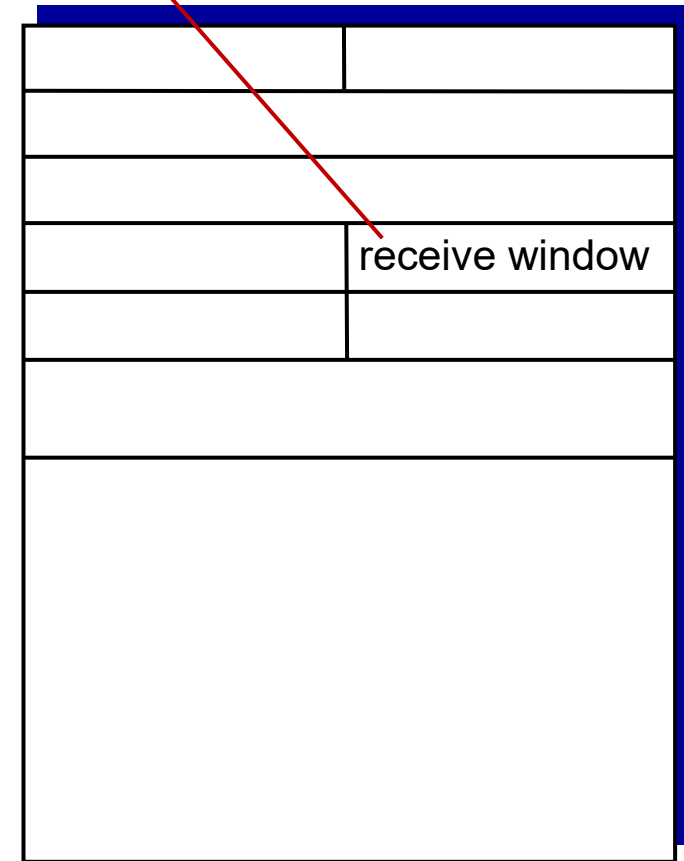


TCP segment format

An example of flow control


Note: We assume only unidirectional communication from client to server. Therefore, only one window at each side is shown.

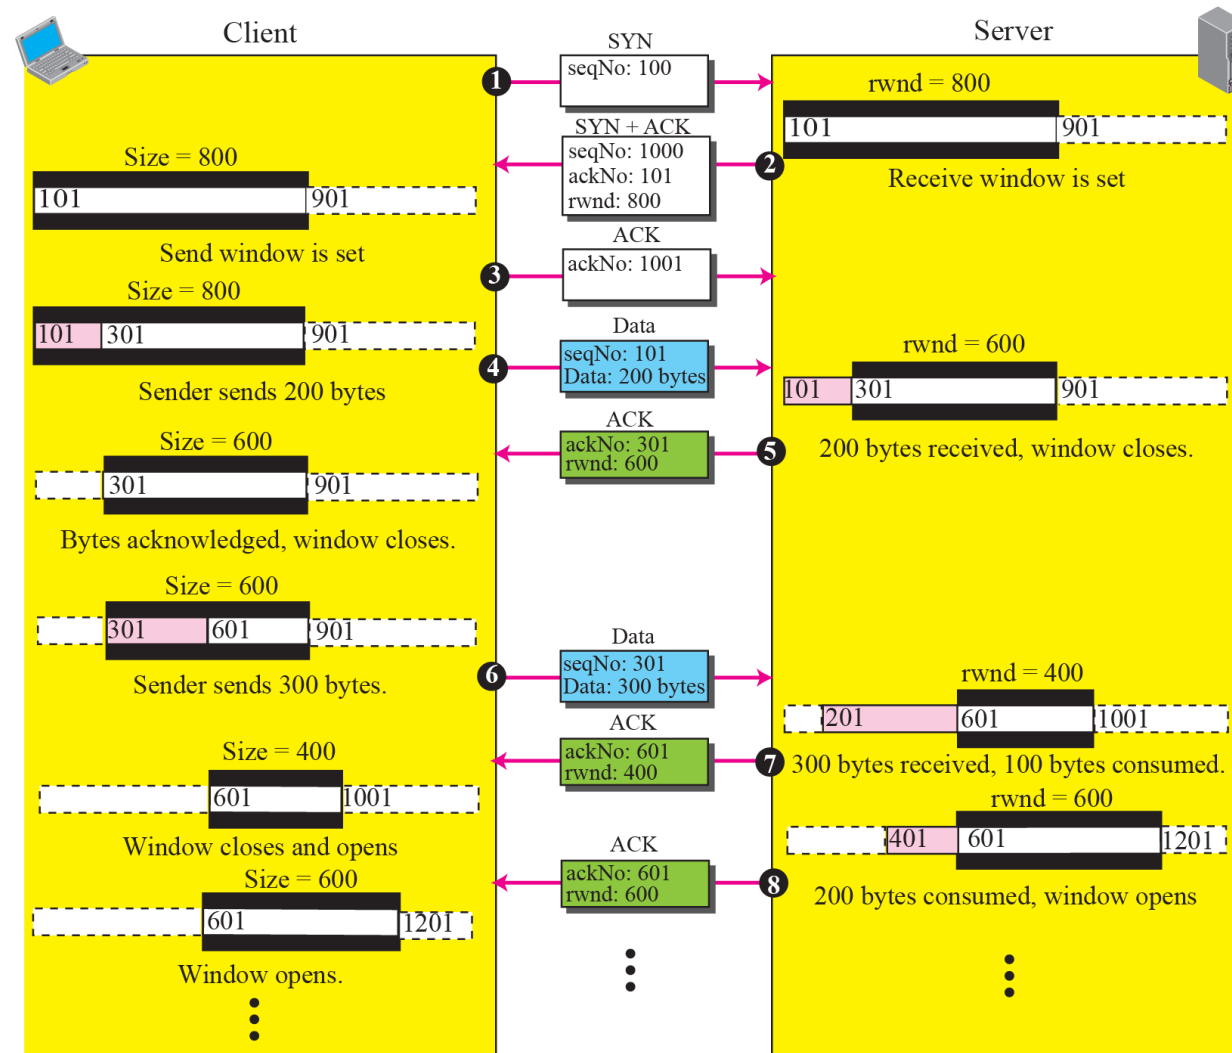

Example

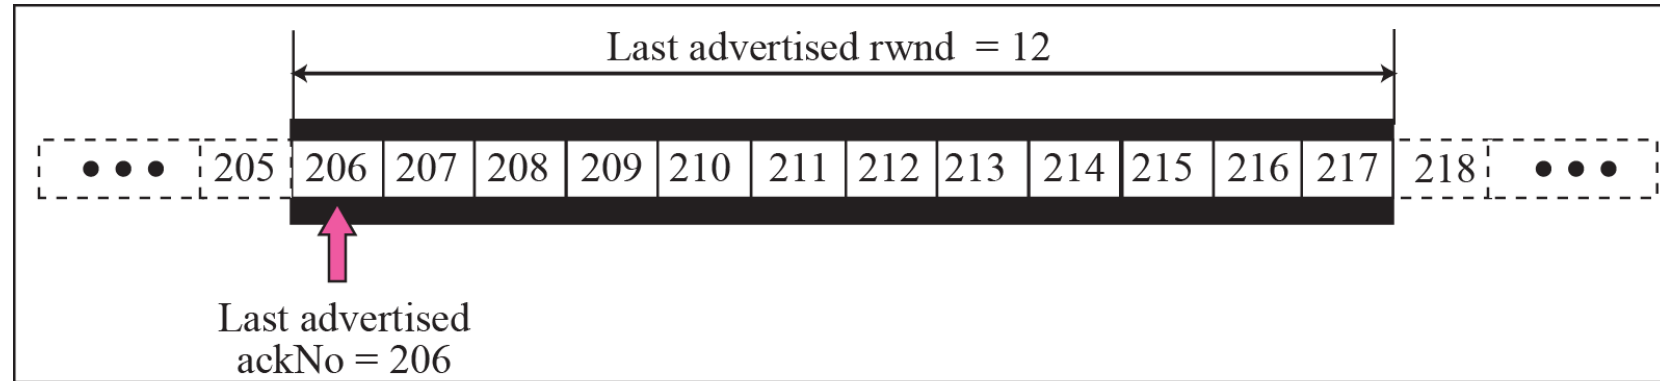

a. The window after the last advertisement

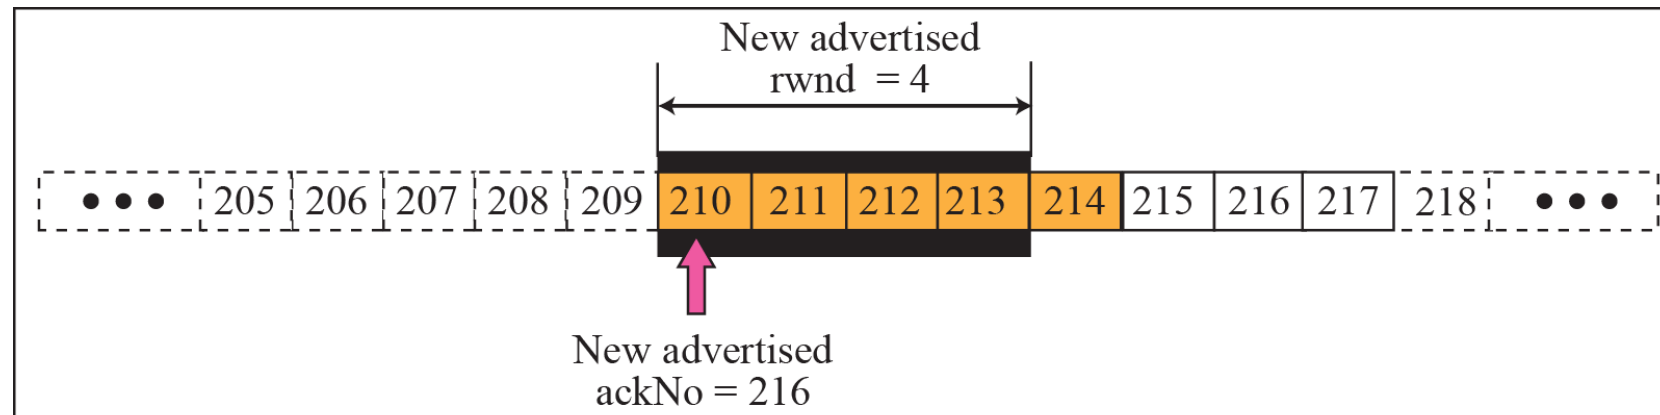

b. The window after the new advertisement; window has shrunk

Principles of congestion control

Congestion:

- informally: “too many sources sending too much data too fast for *network* to handle”
 - long delays (queueing in router buffers)
 - packet loss (buffer overflow at routers)
- different from flow control!
- a top-10 problem!



congestion control:

too many senders,
sending too fast




flow control: one sender
too fast for one receiver

Approaches towards congestion control

End-end congestion control:

- no explicit feedback from network
- congestion *inferred* from observed loss, delay
- approach taken by TCP

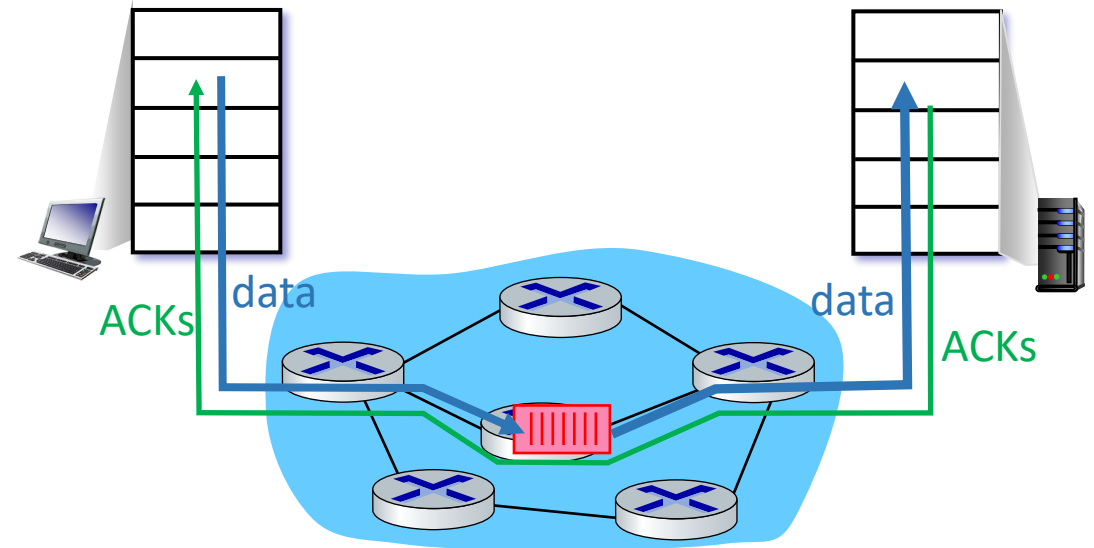

Approaches towards congestion control

Network-assisted congestion control:

- routers provide *direct* feedback to sending/receiving hosts with flows passing through congested router
- may indicate congestion level or explicitly set sending rate
 - TCP ECN (Explicit Congestion Notification), ATM (Asynchronous Transfer Mode)

