27/10/2020

0.1 Uniform Flow

Cartesian Coordinates:

$$\phi = V_\infty \left[x\cos(\alpha) + y\sin(\alpha)\right] \tag{1}$$
$$\psi = V_\infty \left[y\cos(\alpha) - x\sin(\alpha)\right] \tag{2}$$

The conservation of mass is balanced:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \tag{3}$$

The flow is irrotational:

$$\omega_z = \frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} = 0 \tag{4}$$

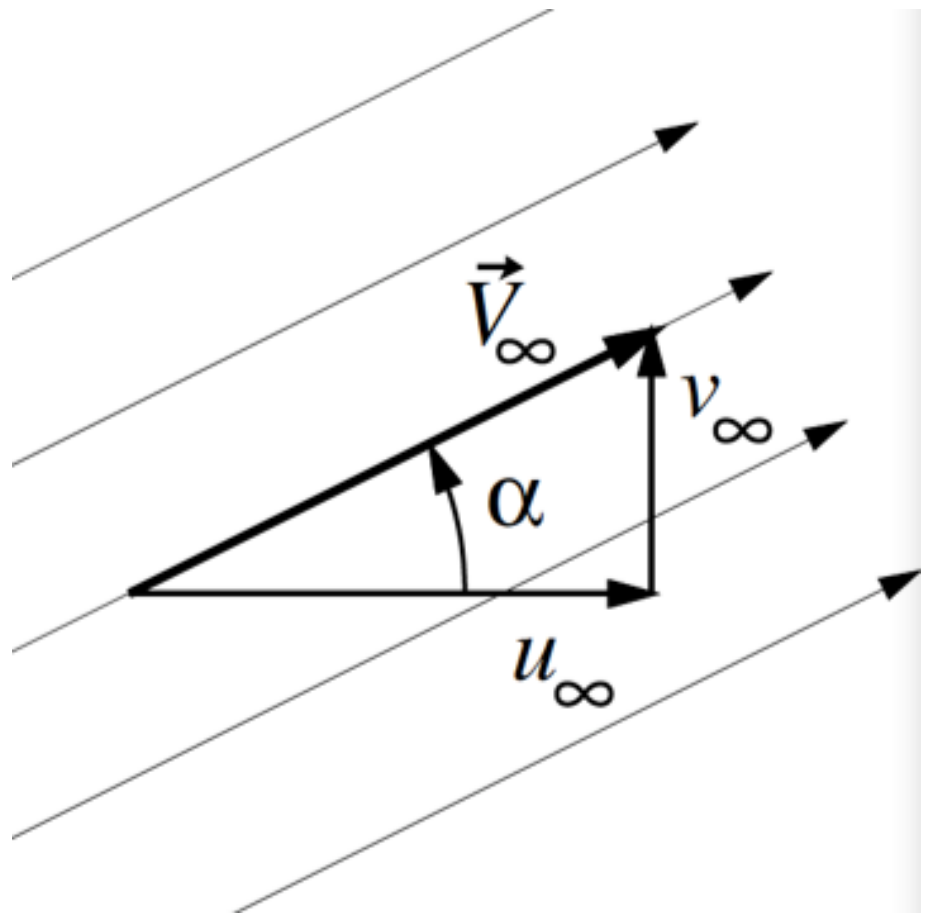

Cylindrical Coordinates:

$$\phi(r,\theta) = V_\infty r\cos(\theta - \alpha) \tag{5}$$
$$\psi(r,\theta) = V_\infty r\sin(\theta - \alpha) \tag{6}$$

The conservation of mass is satisfied for cylindrical coordinates:

$$\nabla \cdot \overrightarrow{V} = \frac{1}{r}\frac{\partial r u_r}{\partial r} + \frac{1}{r}\frac{\partial u_\theta}{\partial \theta} \tag{7}$$
$$= \frac{\partial r(v_\infty \cos(\theta - \alpha))}{\partial r} - \frac{\partial v_\infty \sin(\theta - \alpha)}{\partial \theta} \tag{8}$$
$$v_\infty \cos(\theta - \alpha) - v_\infty \cos(\theta - \alpha) = 0 \tag{9}$$

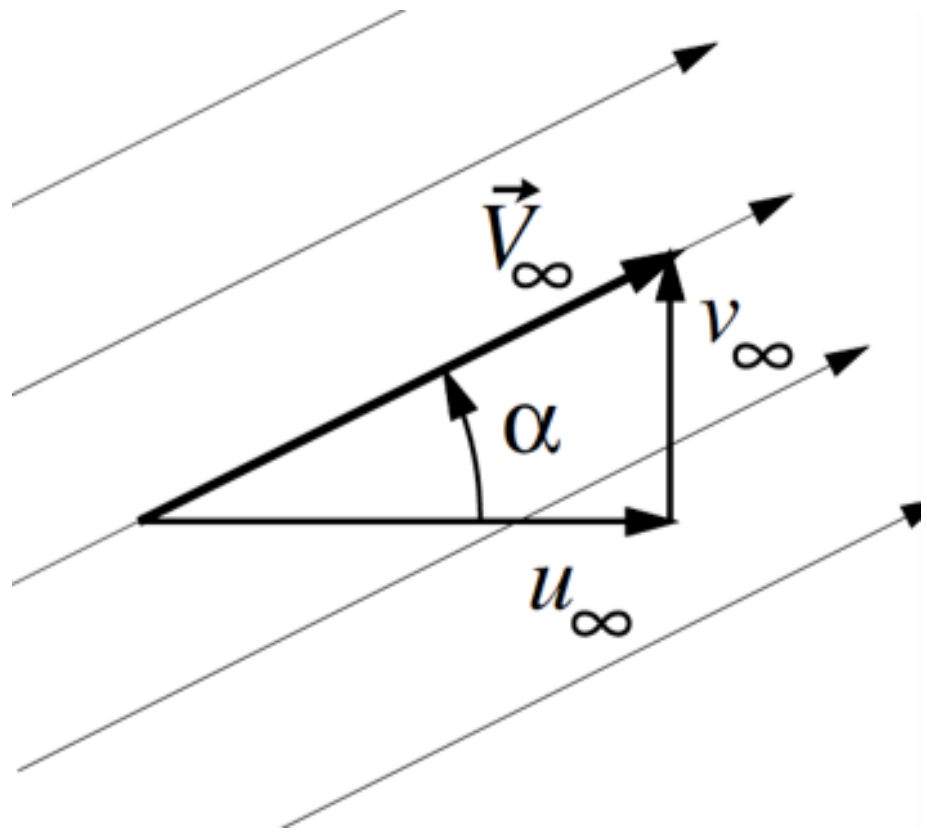

0.2 Source/Sink Flow

Cartesian Coordinates:

$$\phi = \frac{\Lambda}{2\pi} \ln(\sqrt{x^2 + y^2}) \tag{10}$$

$$\psi = \frac{\Lambda}{2\pi} \arctan\left(\frac{y}{x}\right) \tag{11}$$

Cylindrical Coordinates:

$$\phi = \frac{\Lambda}{2\pi} \ln(r) \tag{12}$$

$$\psi = \frac{\Lambda}{2\pi} \theta \tag{13}$$

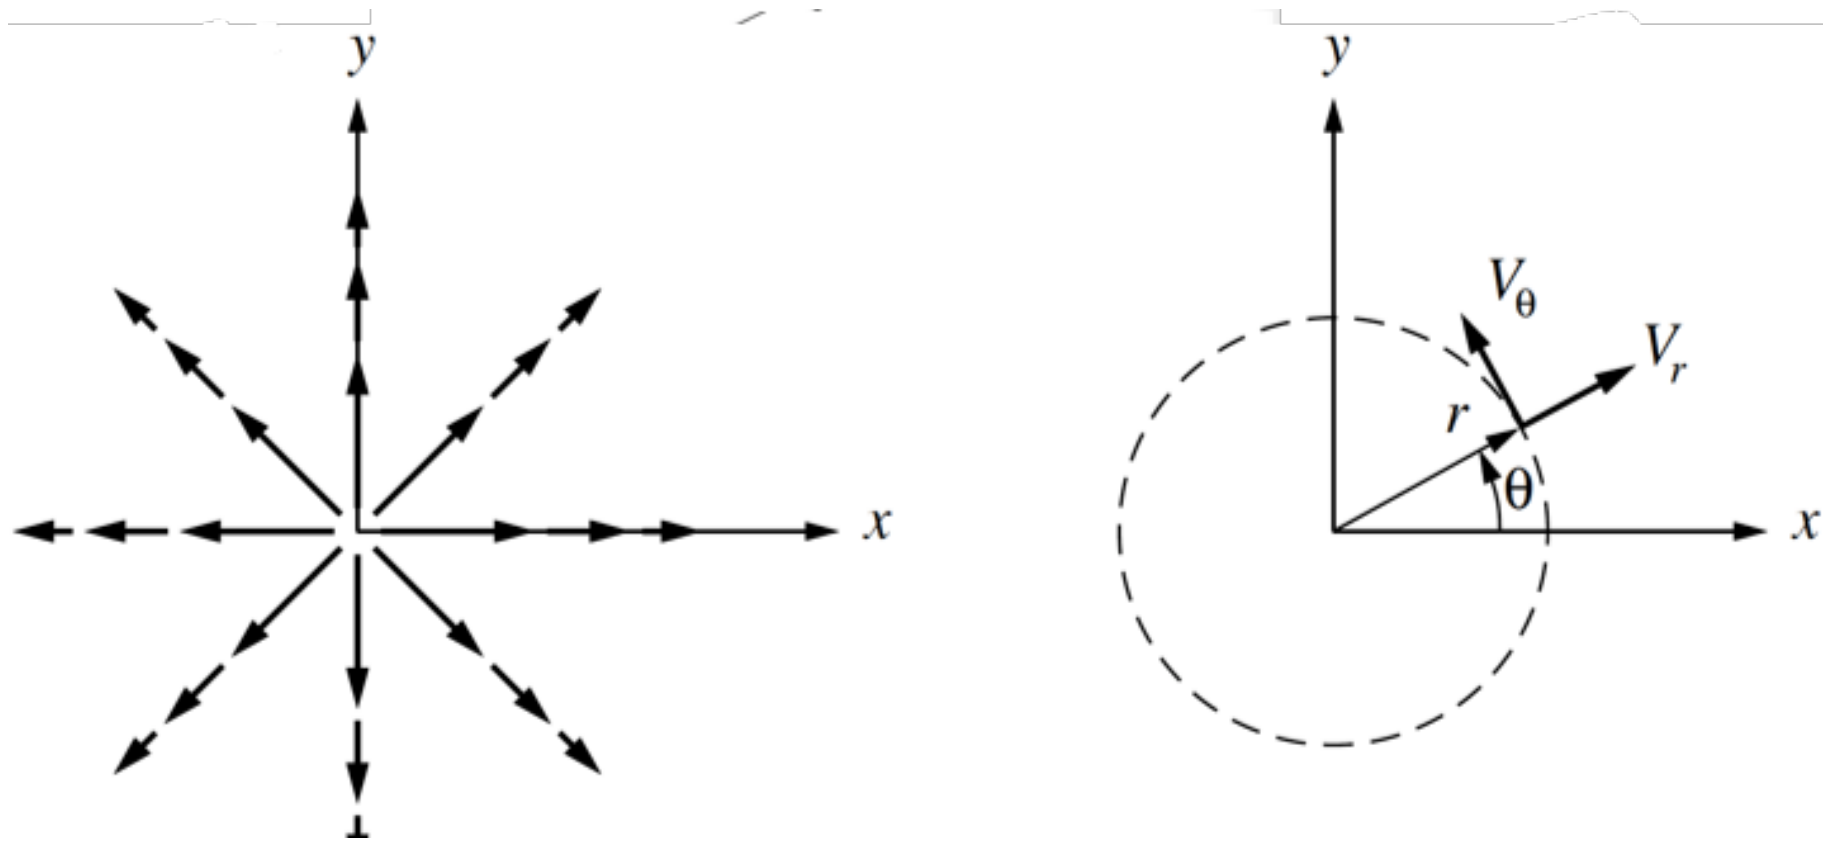

In cylindrical coordinates, we do not have a θ component as it is moving radially outwards from a source.

$$u_r = \frac{\partial \phi}{\partial r} = \frac{\Lambda}{2\pi r} \tag{14}$$

$$u_\theta = \frac{1}{r}\frac{\partial \phi}{\partial \theta} = 0 \tag{15}$$

Here we can see the magnitude of the velocity is dependent on $\frac{1}{r}$. If $\Lambda > 0$, we have a source and if $\Lambda < 0$, we have a sink.

0.3 Uniform Flow + Source

$$\phi(r, \theta) = \frac{\Lambda}{2\pi} \ln(r) + V_\infty r \cos\theta \tag{16}$$

$$\psi(r, \theta) = \frac{\Lambda}{2\pi} \theta + V_\infty r \sin\theta \tag{17}$$

Stream function $\psi(r, \theta)$ of:

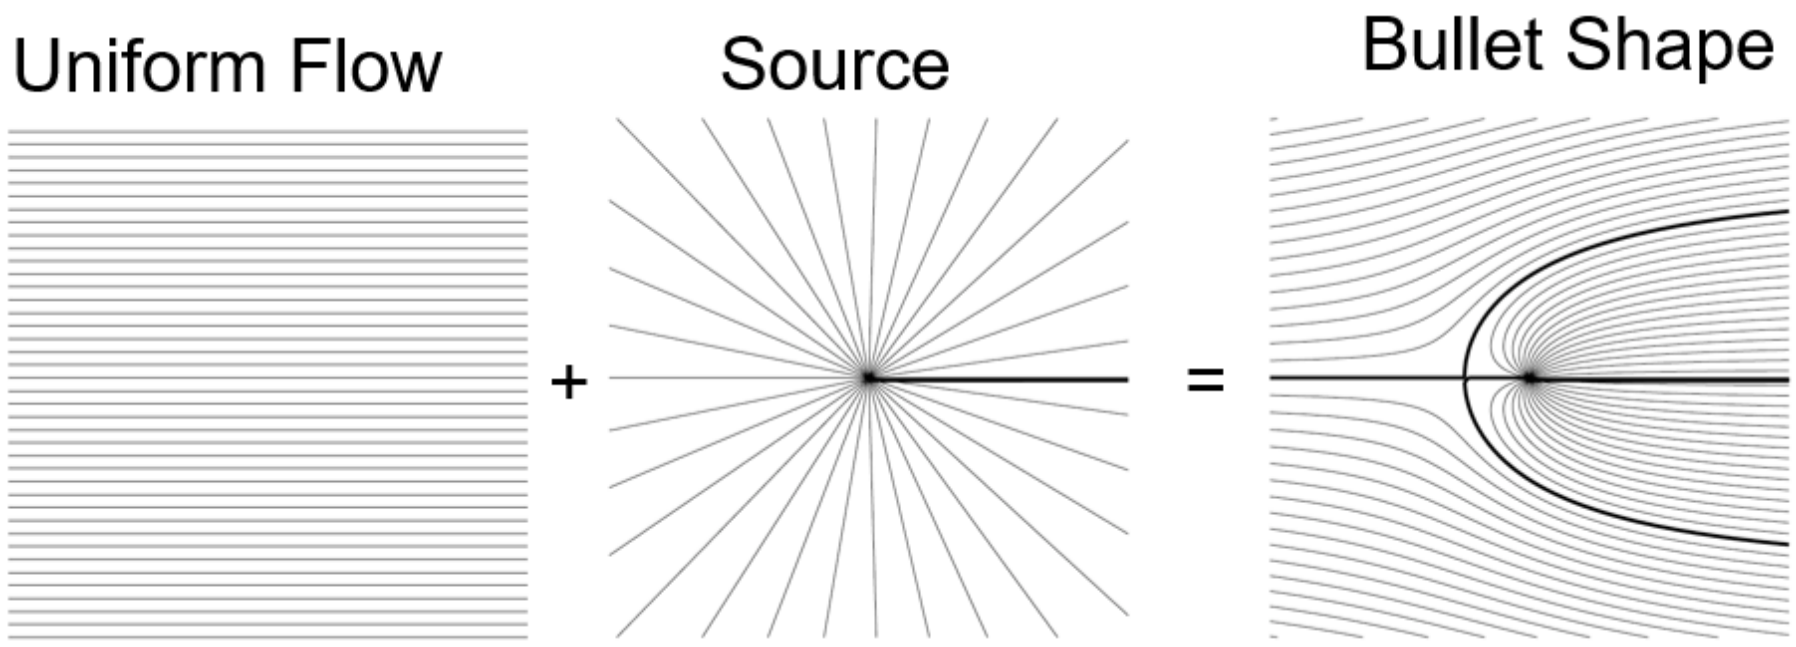

0.4 Uniform Flow + Source + Sink

$$\phi - V_\infty r\cos\theta + \frac{\Lambda}{2\pi}(\ln(r_1) - \ln(r_2)) \tag{18}$$

$$\psi = V_\infty r\sin\theta + \frac{\Lambda}{2\pi}(\theta_1 - \theta_2) \tag{19}$$

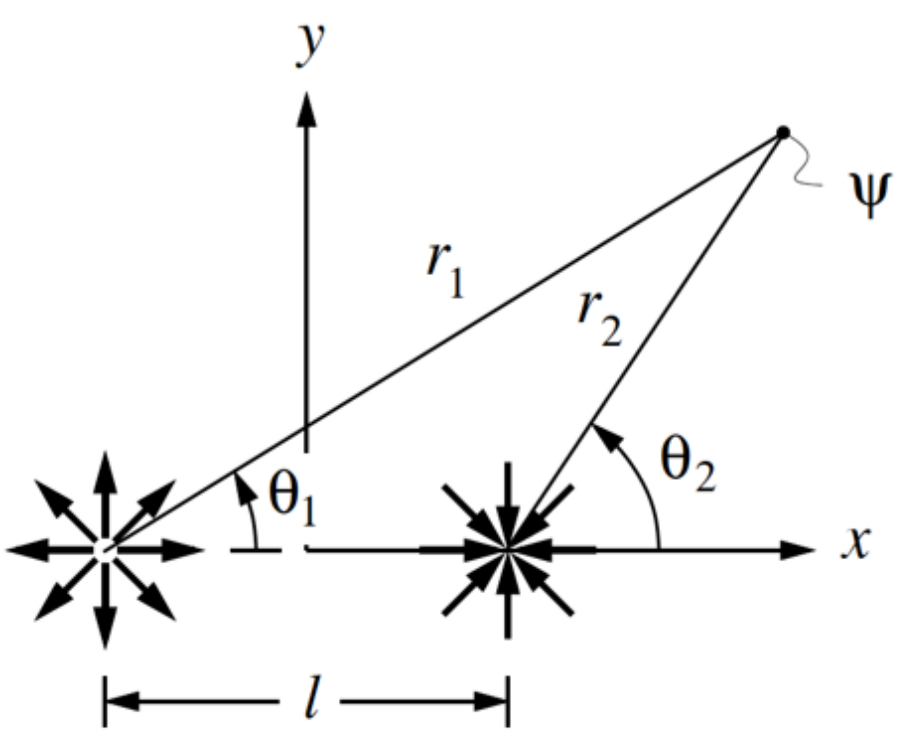

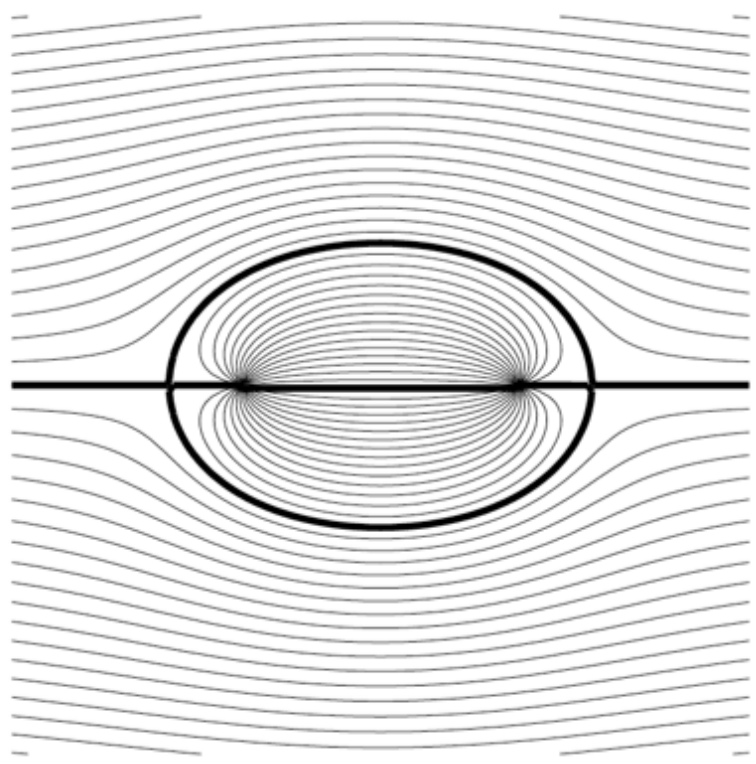

0.5 Doublet

Consider a pair of source and sink of $\pm\Lambda$ who are l apart and $l \times \Lambda =$ constant.

$$\psi = \lim_{l\to 0}\frac{\Lambda}{2\pi}(\theta_1 - \theta_2) = -\frac{k}{2\pi}\frac{\sin\theta}{r} \tag{20}$$

$$\phi = \frac{k}{2\pi}\frac{\cos\theta}{r} \tag{21}$$

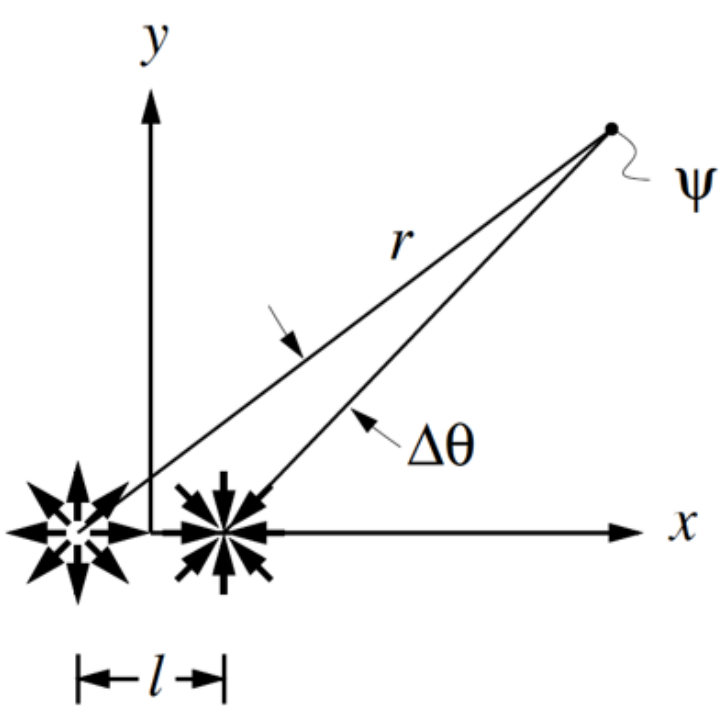

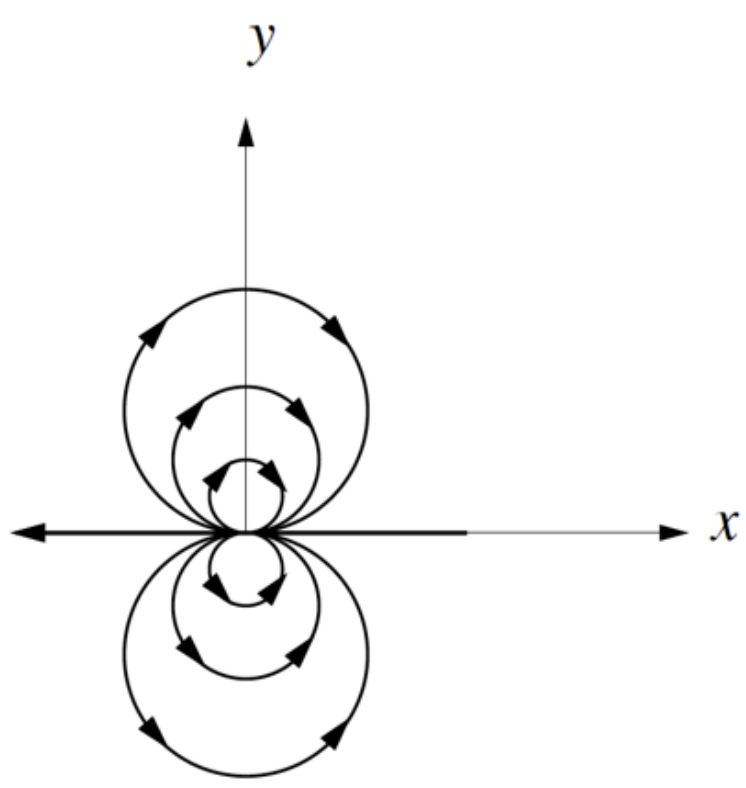

0.6 Cylinder (Uniform Flow + Doublet)

$$\phi = V_\infty r \cos\theta + \frac{k}{2\pi}\frac{\cos\theta}{r} \tag{22}$$

$$\psi = V_\infty r \sin\theta - \frac{k}{2\pi}\frac{\sin\theta}{r} \tag{23}$$

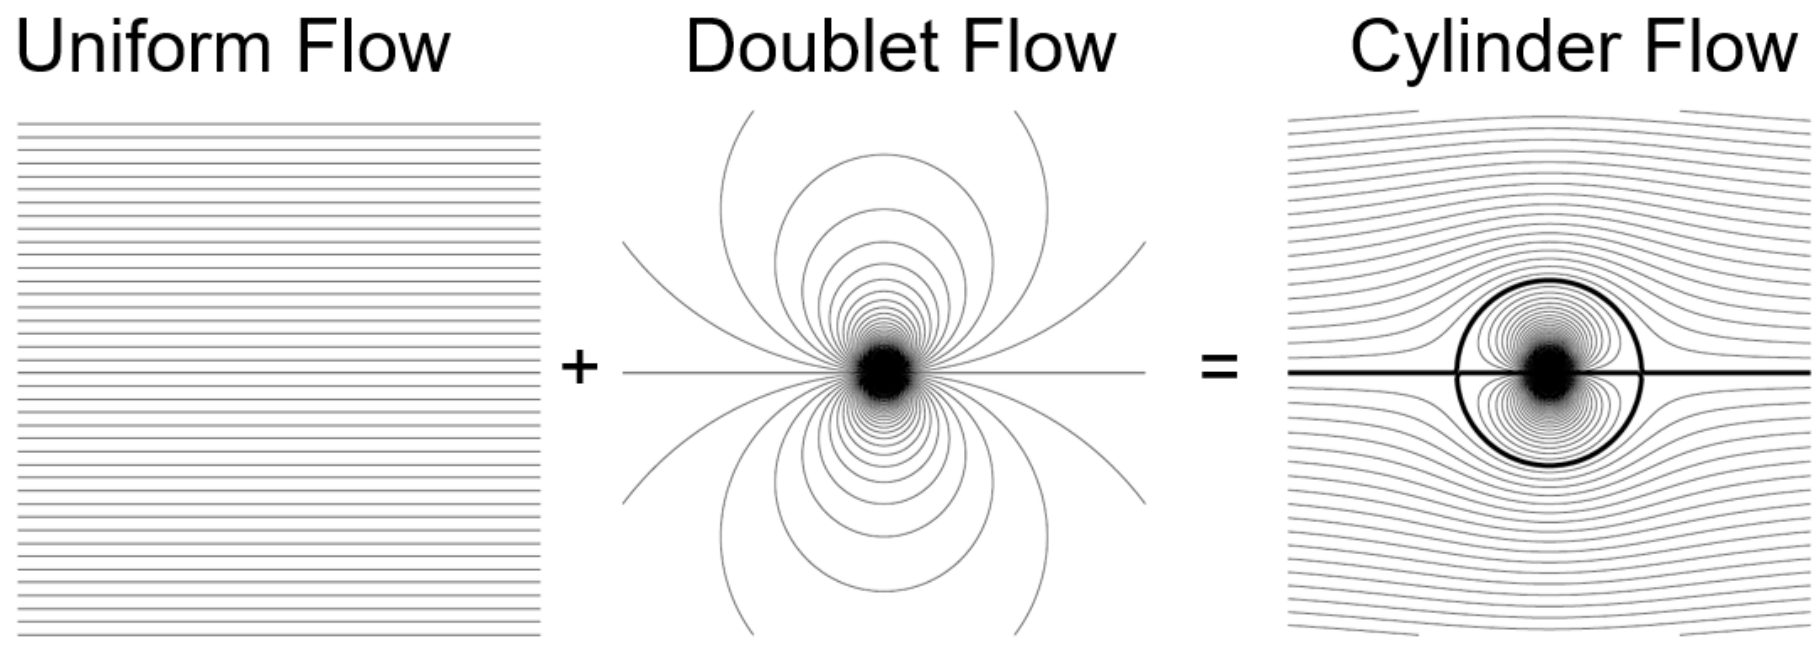

The radius of the cylinder can be derived as so:

$$u_r = \frac{1}{r}\frac{\partial\psi}{\partial\theta} = V_\infty \cos\theta - \frac{k}{2\pi}\frac{\cos\theta}{r^2} \tag{24}$$

$$u_\theta = -\frac{\partial\psi}{\partial r} = -\left(V_\infty \sin\theta + \frac{k}{2\pi}\frac{\sin\theta}{r^2}\right) \tag{25}$$

On the cylinder, $\vec{u}\cdot\hat{n} = 0$

$$\hat{n} = \hat{i}_r \rightarrow u_r(R) = 0 \tag{26}$$

$$V_\infty \cos\theta - \frac{k}{2\pi}\frac{\cos\theta}{R^2} = 0 \tag{27}$$

$$R = \sqrt{\frac{k}{2\pi V_\infty}} \tag{28}$$

We can rewrite ϕ and ψ

$$\phi = V_\infty r \cos\theta \left(1 + \frac{R^2}{r^2}\right) \tag{29}$$

$$\psi = V_\infty r \sin\theta \left(1 - \frac{R^2}{r^2}\right) \tag{30}$$

On the cylinder surface, $r = R$ and inputting this into ψ:

$$\psi = 0 \tag{31}$$

0.7 Uniform Stream with Varying Direction

All we need to do to generalise our equations a bit more is to rewrite our equations with an extra angular term, α:

$$\phi = V_\infty r \cos(\theta - \alpha)\left(1 + \frac{R^2}{r^2}\right) \tag{32}$$

$$\psi = V_\infty r \sin(\theta - \alpha)\left(1 - \frac{R^2}{r^2}\right) \tag{33}$$

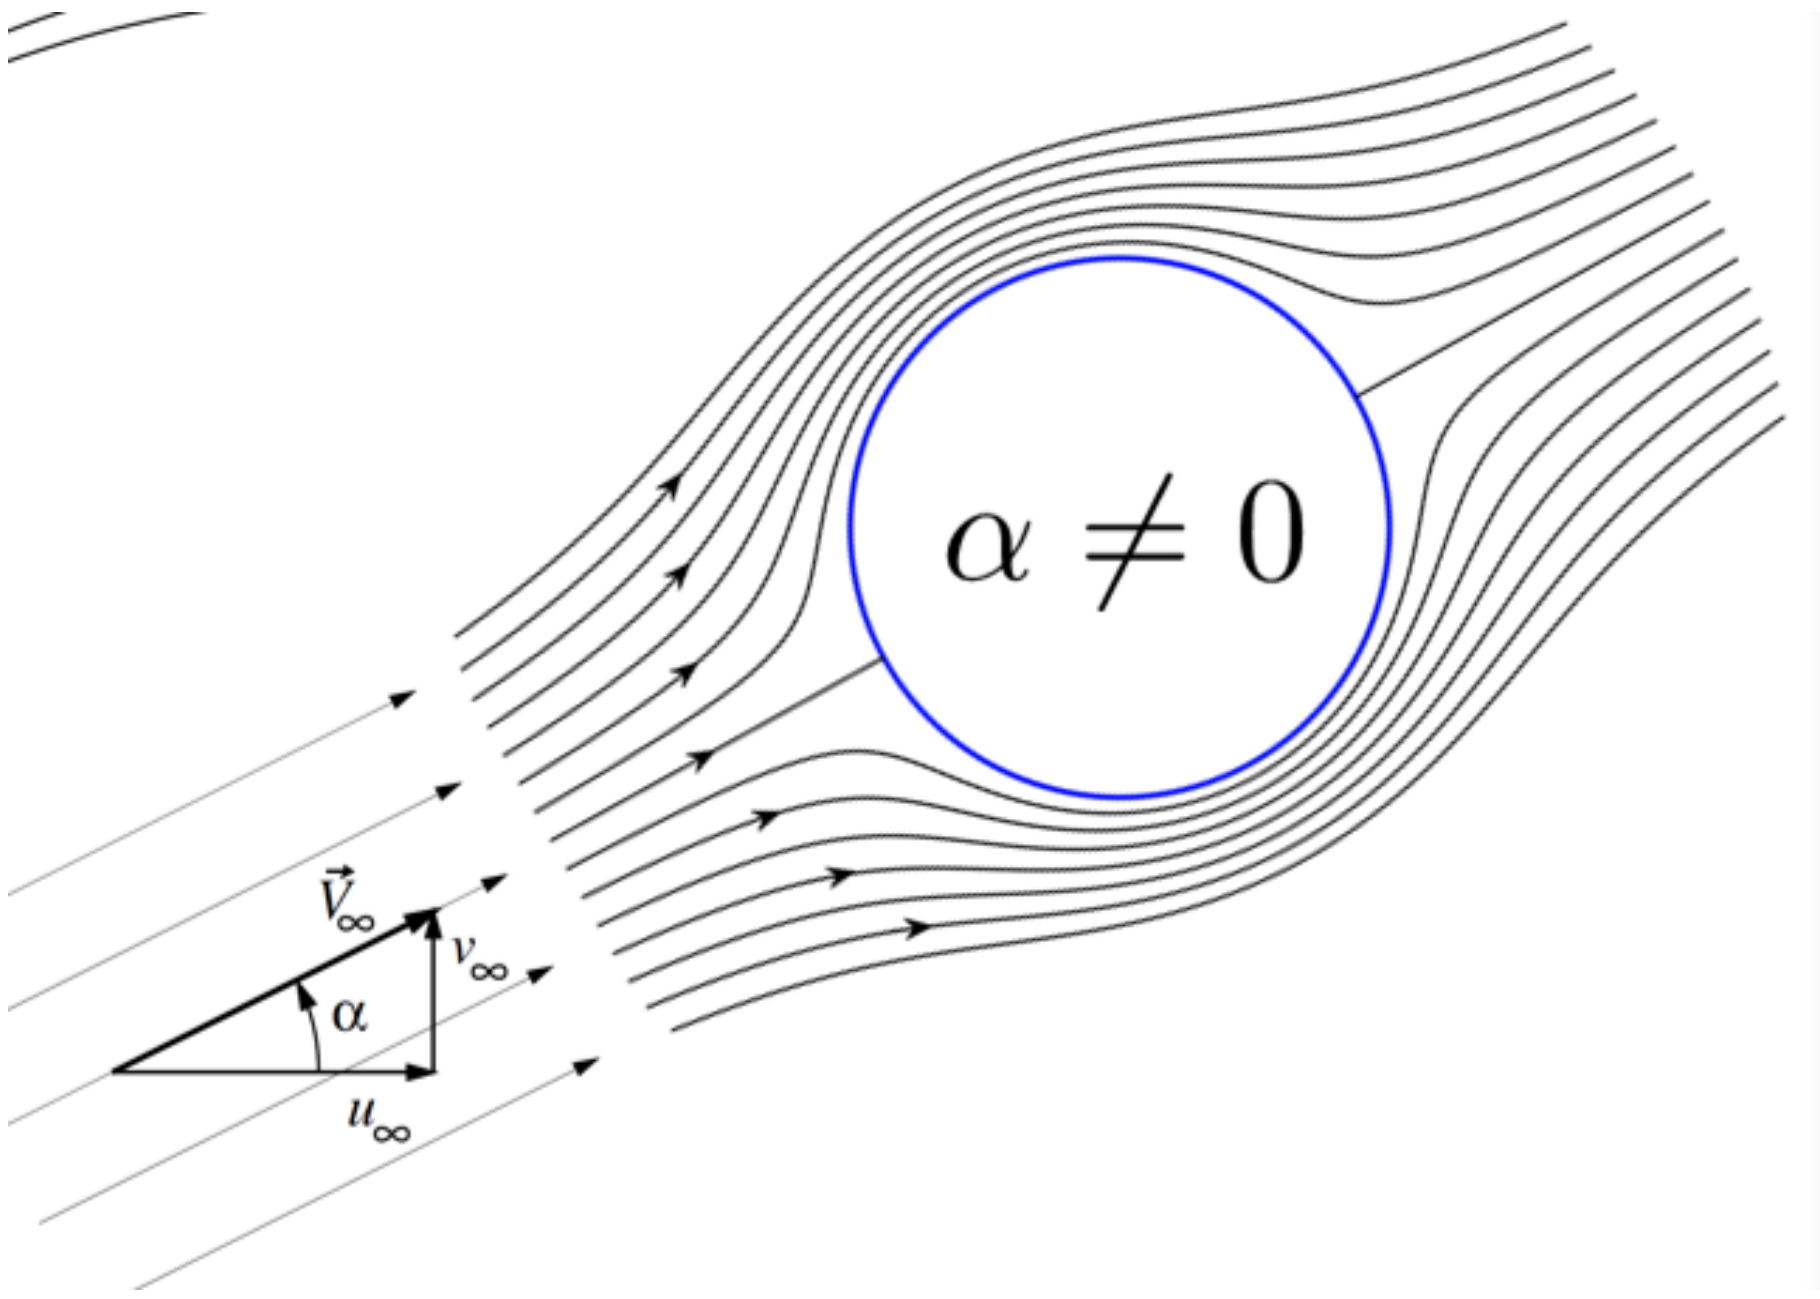

0.8 Adding Circulation with a Vortex Flow

$$\phi = -\frac{\Gamma}{2\pi}\theta \tag{34}$$

$$\psi = \frac{\Gamma}{2\pi}\ln\left(\frac{r}{R}\right) \tag{35}$$

$$u_r = \frac{1}{r}\frac{\partial\psi}{\partial\theta} = 0 \tag{36}$$

$$u_\theta = -\frac{\partial\psi}{\partial r} = -\frac{\Gamma}{2\pi r} \tag{37}$$

Where $\Gamma < 0$ is anti-clockwise motion and $\Gamma > 0$ is clockwise motion.

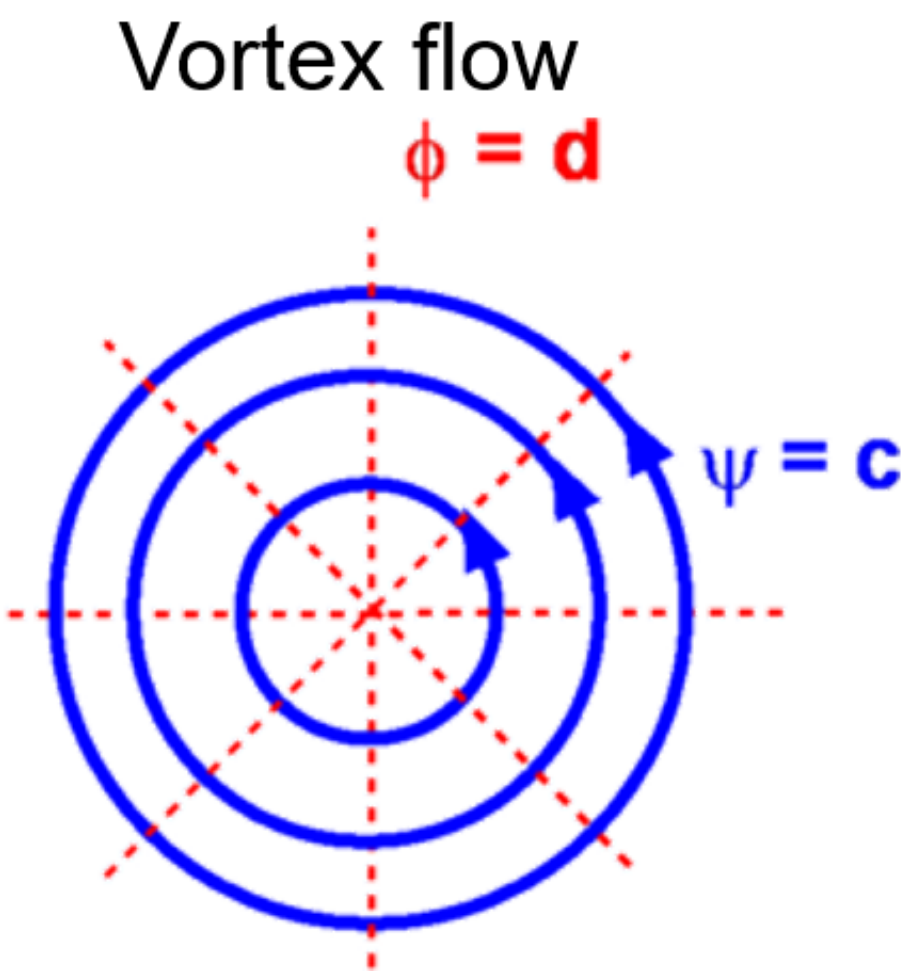

0.9 Cylinder with a Vortex Flow

$$\psi = V_\infty r \sin\theta \left(1 - \frac{R^2}{r^2}\right) + \frac{\Gamma}{2\pi} \ln\left(\frac{r}{R}\right) \tag{38}$$

$$\phi = V_\infty r \cos\theta \left(1 + \frac{R^2}{r^2}\right) - \frac{\Gamma}{2\pi}\theta \tag{39}$$

$$u_r = \frac{1}{r}\frac{\partial\psi}{\partial\theta} = V_\infty \cos\theta \left(1 - \frac{R^2}{r^2}\right) \tag{40}$$

$$u_\theta = -\frac{\partial\psi}{\partial r} = -V_\infty \sin\theta \left(1 + \frac{R^2}{r^2}\right) \tag{41}$$

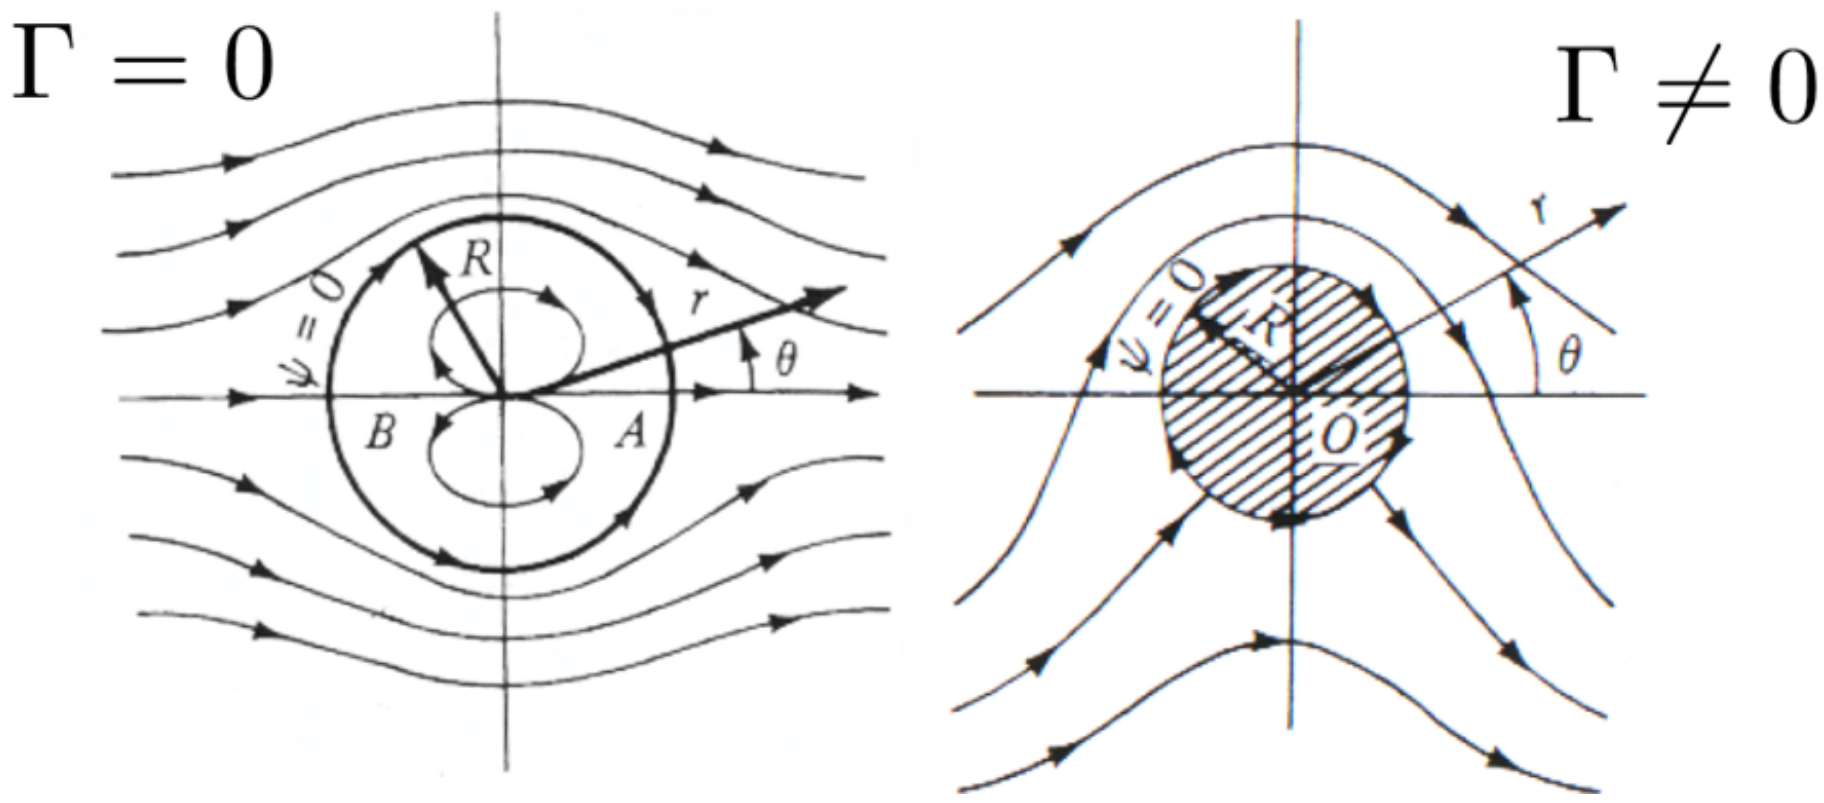

0.10 Lift and Drag of a Cylinder with Circulation

Apply Bernoulli:

$$p_\infty + \frac{1}{2}\rho V_\infty^2 = p(r,\theta) + \frac{1}{2}\rho(u_r^2 + u_\theta^2) \tag{42}$$

$$c_p = \frac{p - p_\infty}{\frac{1}{2}\rho V_\infty^2} = 1 - \frac{u_r^2 + u_\theta^2}{V_\infty^2} \tag{43}$$

On the cylinder surface: $u_r = 0$

$$c_p(R,\theta) = 1 - \frac{u_\theta^2}{V_\infty^2} = 1 - \frac{(2V_\infty \sin\theta + \frac{\Gamma}{2\pi R})^2}{V_\infty^2} \tag{44}$$

$$= 1 - \left(4\sin^2(\theta) + \frac{\Gamma^2}{4\pi^2 V_\infty^2 R^2} + \frac{2\Gamma\sin(\theta)}{V_\infty \pi R}\right) \tag{45}$$

0.11 Lift of the Cylinder

We need to calculate c_p on the surface of the cylinder.

$$L = -\frac{1}{2}\rho V_\infty^2 \int_0^{2\pi} \left(c_p \cdot \hat{n} \cdot \hat{j} R\right) \mathrm{d}\theta \tag{46}$$

$$= -\frac{1}{2}\rho V_\infty^2 \int_0^{2\pi} \left(c_p \sin\theta R\right) \, \mathrm{d}\theta \tag{47}$$

$$L = -\frac{1}{2}\rho V_\infty^2 \int_0^{2\pi} \left(1 - \frac{(2V_\infty \sin\theta + \frac{\Gamma}{2\pi R})^2}{V_\infty^2}\right) \sin\theta R \, \mathrm{d}\theta \tag{48}$$