Sakthi Automotive Group - Foundry Division

WEEKLY FOUNDRY MANAGEMENT INFORMATION SYSTEM • Period: **2026-W45** • Generated: 06-Nov-2026 15:34


POURED CASTINGS	LIQUID METAL	FOUNDRY REJECTION	FIRST-PASS YIELD	SCRAP LOSS COST
12,628	98.0 MT	3.29%	96.71%	INR 87,035
Output Target: 12,750	Molding Yield: 96.6%	415 Rejected Pcs	12,213 OK Pcs	Direct Material Cost

Executive Observations & Action Points

- Foundry poured 98.0 MT of liquid iron across the week, yielding 12,628 total castings.
- Rejection closed at 3.29%, comfortably meeting the warning threshold (<3.50%).
- First-Pass Yield remained strong at 96.71% across Disamatic high-pressure lines.
- Top scrap defect driver was Sand Inclusion accounting for 36.4% of rejected volume.

1. Daily Production & Rejection Summary


Date	Day	Target	Poured	Accepted	Rejected	Rejection %	Weight (MT)	Status
2026-11-02	Monday	3,650	**3,580**	3,459	121	**3.38%**	26.79	Good
2026-11-03	Tuesday	2,100	**2,085**	2,020	65	**3.12%**	17.37	Good
2026-11-04	Wednesday	1,500	**1,505**	1,457	48	**3.19%**	9.93	Good
2026-11-05	Thursday	1,400	**1,378**	1,329	49	**3.56%**	11.65	Watch
2026-11-06	Friday	1,300	**1,310**	1,268	42	**3.21%**	11.62	Good
2026-11-07	Saturday	1,500	**1,490**	1,443	47	**3.15%**	9.82	Good
2026-11-08	Sunday	1,300	**1,280**	1,237	43	**3.36%**	10.80	Good
WEEKLY TOTAL		**12,750**	**12,628**	**12,213**	**415**	**3.29%**	**97.98**	-

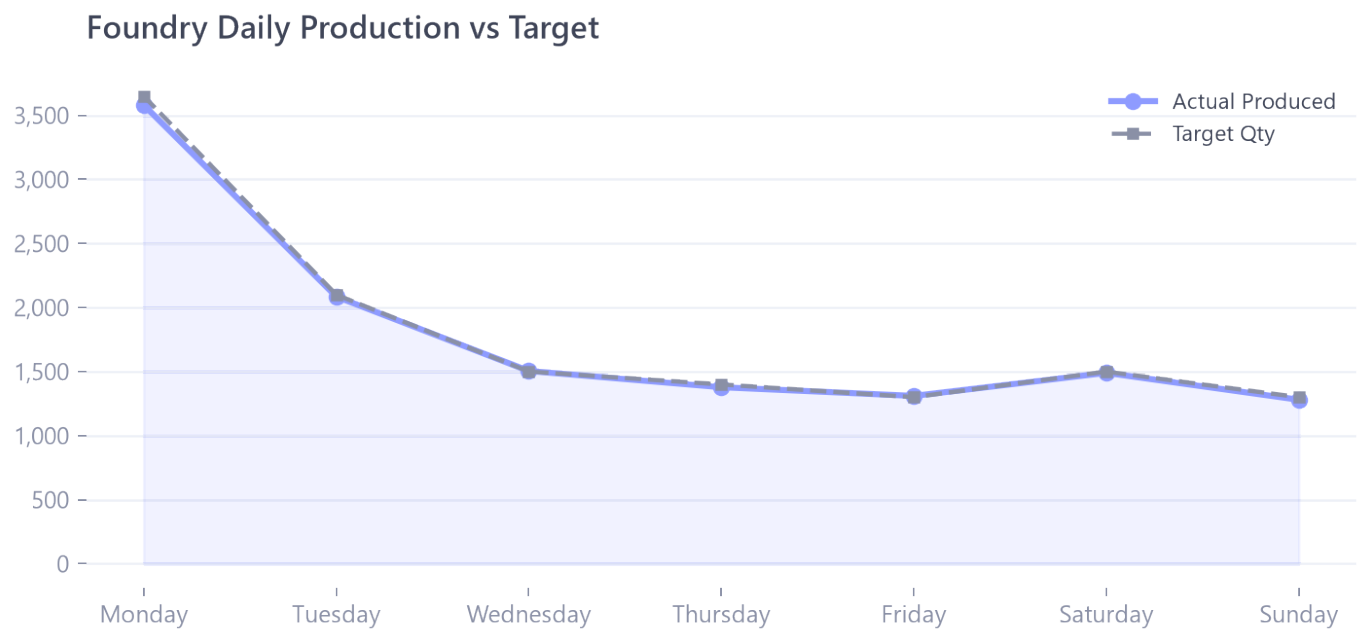

2. Shift-wise Performance

Shift Name	Target Pcs	Poured Pcs	Accepted Pcs	Rejected Pcs	Rejection %
Afternoon Shift	4,850	4,783	4,620	163	**3.41%**
Morning Shift	7,150	7,115	6,888	227	**3.19%**
Night Shift	750	730	705	25	**3.42%**

3. Defect Pareto Distribution

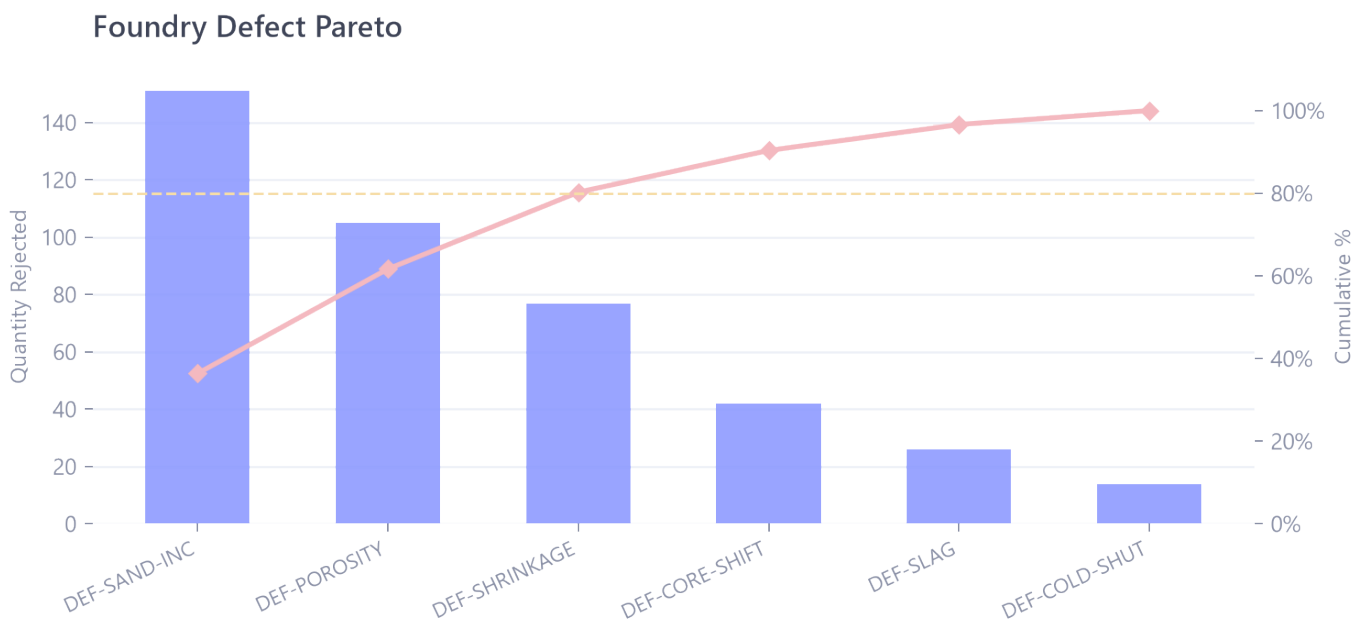

Defect Code	Defect Description	Category	Rejected Pcs	Scrap Pcs	Rework Pcs	Scrap Loss Cost	% Share	Cumulative %
DEF-SAND-INC	Sand Inclusion / Mold Erosion	MOLDING	151	123	28	INR 26,230	36.4%	**36.4%**
DEF-POROSITY	Gas Porosity / Pin Holes	METALLURGICAL	105	105	0	INR 22,405	25.3%	**61.7%**
DEF-SHRINKAGE	Shrinkage Cavity / Porosity	METALLURGICAL	77	77	0	INR 19,970	18.6%	**80.2%**
DEF-CORE-SHIFT	Core Shift / Wall Thinning	CORE_MAKING	42	32	10	INR 9,920	10.1%	**90.4%**
DEF-SLAG	Slag / Dross Inclusion	POURING	26	22	4	INR 5,920	6.3%	**96.6%**
DEF-COLD-SHUT	Cold Shut / Incomplete Pour	POURING	14	14	0	INR 2,590	3.4%	**100.0%**

4. High-Runner Casting Quality Matrix

Part Number	Description	Material Grade	Poured Pcs	Accepted Pcs	Rejected Pcs	Rejection %
P-BRK-DISC-01	Ventilated Brake Disc Rotor 280mm	Grey Iron FG 260	7,855	7,609	246	**3.13%**
P-BRK-DRUM-02	Heavy Duty Brake Drum 220mm	Grey Iron FG 260	1,718	1,653	65	**3.78%**
P-STR-KNCK-03	Steering Knuckle Front LH	Ductile Iron SGI 500/7	1,375	1,330	45	**3.27%**
P-FLW-WHL-05	Engine Flywheel Dual Mass 240mm	Grey Iron FG 300	985	950	35	**3.55%**
P-STR-KNCK-04	Steering Knuckle Front RH	Ductile Iron SGI 500/7	695	671	24	**3.45%**