

INSTRUMENT
APPROACH
CHART-ICAO
ZSZS/HSN

5L-5

AD ELEV 1.8
DTHR ELEV 1.8

ZHOUSHAN/Putuoshan

RNP LOC/DME z RWY36

Zhoushan Tower

TWR
18.05
(124.35)


LOC IZS
110.5

Final Apch Cr
001°


FAF **D6.5 IZS**
700(698)

MISSED APPROACH


Climb straight ahead to 600, turn RIGHT to ZS206 at 1200 or above, and fly to ZS107 to approach again, or join holding pattern by ATC.



BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.

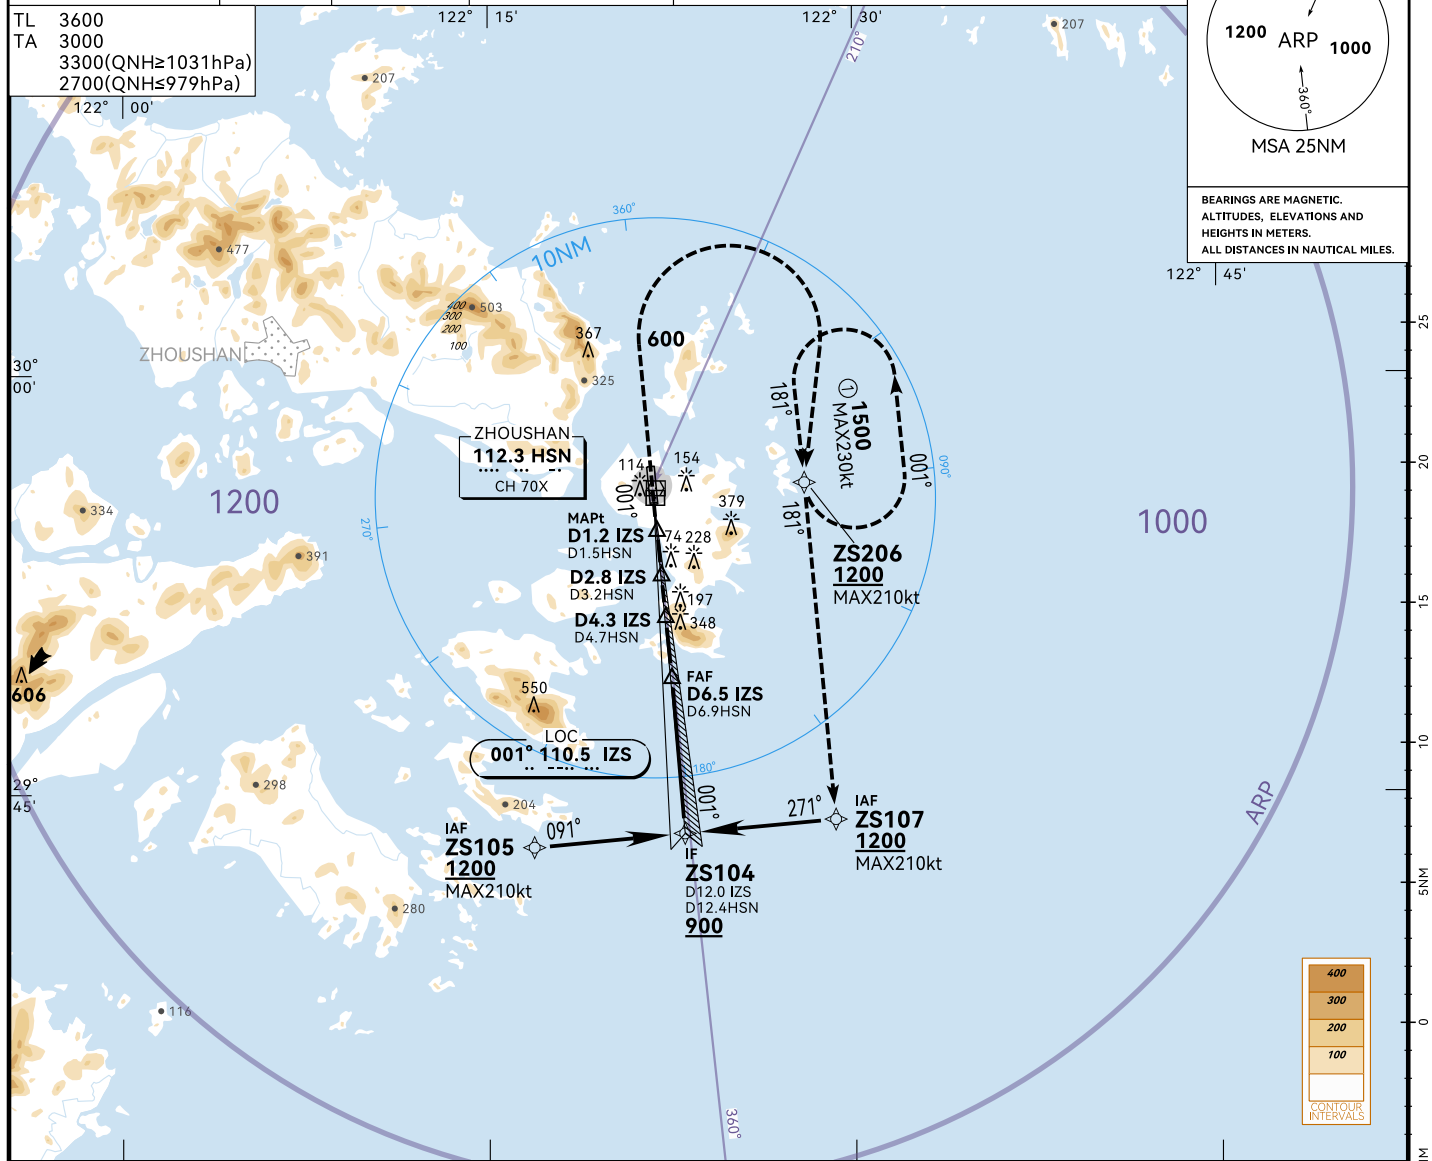

DME (IZS)	3	4	5	6					
ALT	323	430	538	645					

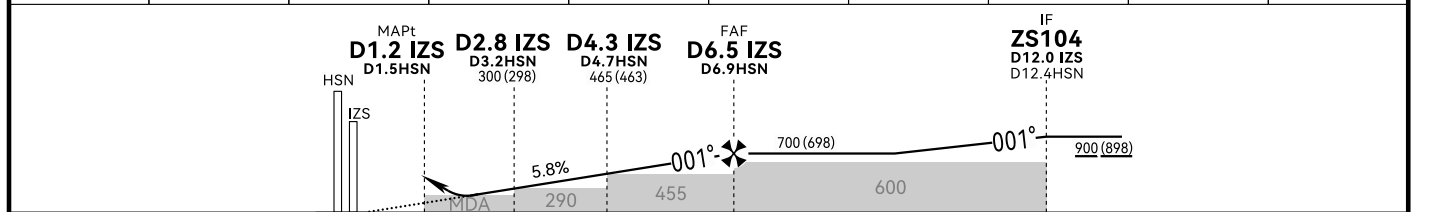

THR displaced 100m -0.5-0.20 1.0 2.6 4.2 6.4 11.9NM

FAF-MAPt 5.4NM						
GS kt	80	100	120	140	160	180
min:sec	4:03	3:14	2:42	2:19	2:02	1:48
GP 5.8%fbm	470	590	700	820	940	1060

PALS CAT I
PAPI
600
210kt MAX
RT
ZS206 & 1200 & 210kt MAX

	LOC/DME			CIRCLING		
	MDA(H)	OCA(H)	VIS	MDA(H)	OCA(H)	VIS
A	200(198)	190(188)	2600	490(488)	490(488)	4800
B						
C	200(198)	190(188)	2800	540(538)	540(538)	4800
D	200(198)	190(188)	3000	600(598)	600(598)	5000

Changes: Procedure, VAR, MSA, chart number.