

INSTRUMENT
APPROACH
CHART-ICAO
ZSZS/HSN

5V-1

AD ELEV 1.8
THR ELEV 1.8

ZHOUSHAN/Putuoshan

VOR/DME RWY18

Zhoushan Tower

VAR6.2°W

VOR **HSN**

al Anch Crs

FAF **D7.4 HSN**
700(698)


MISSED APPROACH

Climb straight ahead to 600, turn LEFT to 'HSN' at 1200 or above, and approach again, or join holding pattern by ATC.

TL	3600
TA	3000
	3300(QNH≥1031hPa)
	2700(QNH≤979hPa)

Notes:


1. Missed approach turn MAX IAS210kt.
2. 'HSN' located at 208m E of RCL, 1450m inside THR18. The angle between approach track and RWY is 4°, the intersection of approach track and RWY is 1852m from THR.
3. **A** Approach after join HSN holding pattern and descend altitude by ATC due airspace restrictions only.



BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



DME (HSN)	7	6	5	4	3				
ALT	661	557	453	350	246				

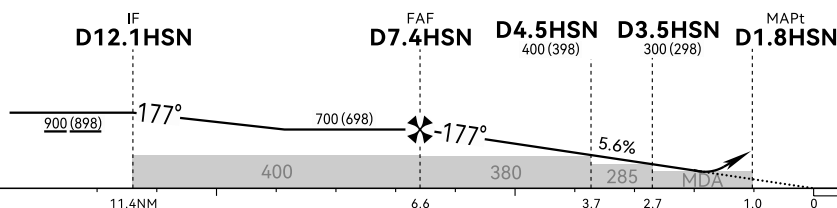

FAF-MAPt 5.6NM						
GS kt	80	100	120	140	160	180
min:sec	4:12	3:22	2:48	2:24	2:06	1:52
5.6fpm	450	570	680	790	910	1020

	VOR/DME			CIRCLING		
	MDA(H)	OCA(H)	VIS	MDA(H)	OCA(H)	VIS
A	200(198)	190(188)	3000	490(488)	490(488)	4800
B						
C	200(198)	190(188)	3200	540(538)	540(538)	4800
D	200(198)	190(188)	3400	600(598)	600(598)	5000

Changes: Procedure, VAR, MSA, chart number.