

DEBUGGING AND PROFILING









LEARNING OBJECTIVES

- Learn some tips to help debug in SYCL.
- Learn how to profile SYCL code for CUDA backend.
- Learn about coalesced global memory access.
- Learn some optimization tips.







SYCL EXCEPTIONS

- In SYCL errors are handled by throwing exceptions.
- It is crucial that these errors are handled, otherwise your application could fail in unpredictable ways.
- In SYCL there are two kinds of error:
 - Synchronous errors (thrown in user thread) .
 - Asynchronous errors (thrown by the SYCL scheduler).







SYCL EXCEPTIONS

• Asynchronous SYCL exceptions will only appear when wait() is called on a queue or event.







DEBUGGING STRATEGIES

- If using default constructed queues, use SYCL_DEVICE_FILTER to run code on the host.
- SYCL_QUEUE_THREAD_POOL_SIZE=1 also ensures that kernel code is executing completely serially.
- Standard tools like GDB (compile with -g), valgrind can be used to debug SYCL code.
- In-kernel printfs are a great way to debug code from device.







DEBUGGING STRATEGIES

SYCL_DEVICE_FILTER=host SYCL_QUEUE_THREAD_POOL_SIZE=1 gdb ./a.out SYCL_DEVICE_FILTER=host SYCL_QUEUE_THREAD_POOL_SIZE=1 valgrind ./a.out





OPTIMIZATION








- Memory access patterns can significantly affect performance.
- Especially important when reading or writing to global memory.






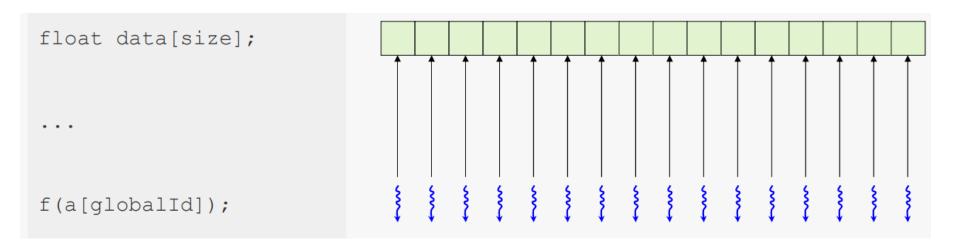






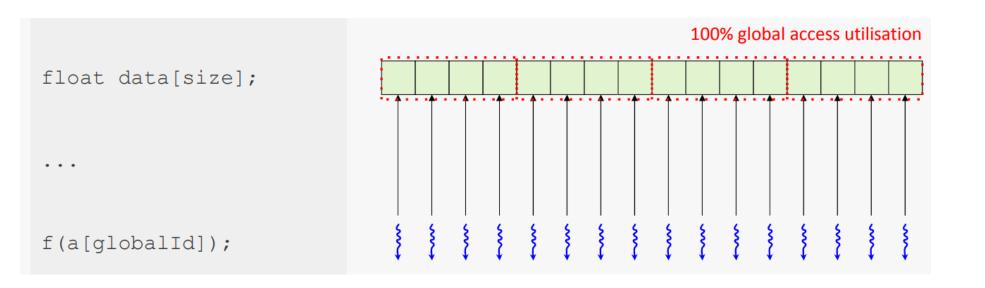






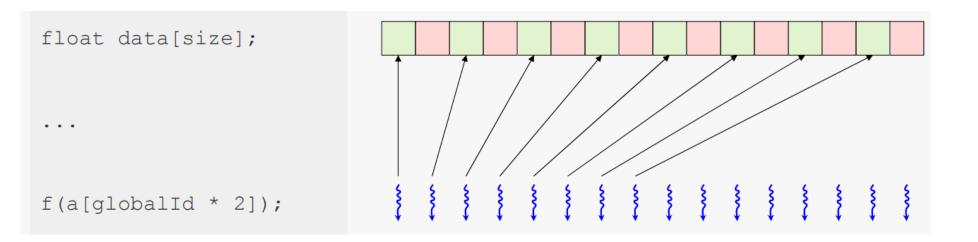





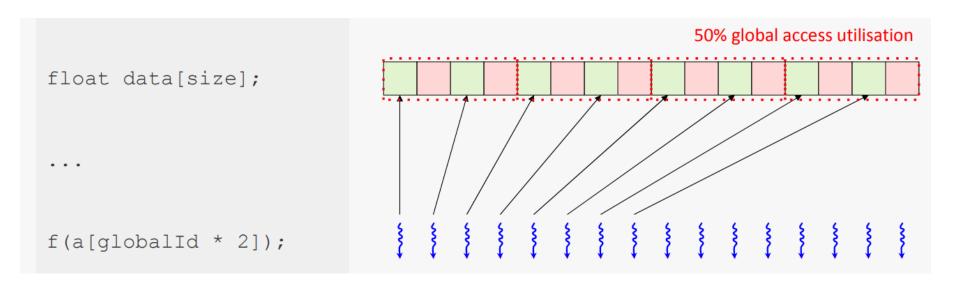







CAUTION: INDEX FLIPPING


- SYCL ranges, nd_ranges are row major.
- In SYCL, for some kind of 2 dimensional range, a workitem with sycl::id(i, j) is neighbors with a workitem with sycl::id(i, j+1).
- This is unlike CUDA, where threads (i, j) and (i+1, j) are neighbors.
- Calculating a linear index manually is not recommended. Better to use get_local_linear_id(), get_global_linear_id().







ROW MAJOR DATA, COLUMN MAJOR MEMORY ACCESS

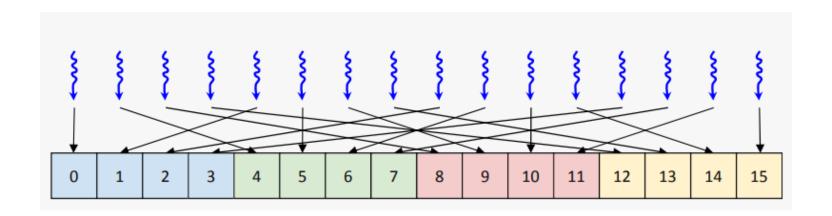








ROW MAJOR DATA, ROW MAJOR MEMORY ACCESS

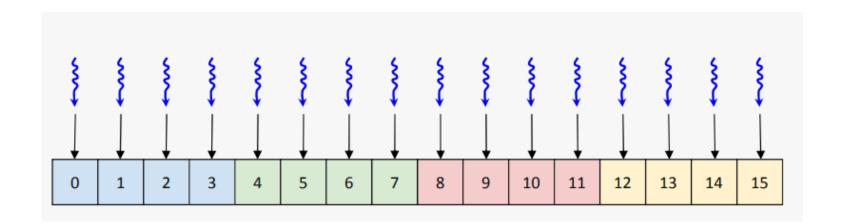





OPTIMIZATION STRATEGIES

- Test different work group sizes
- Minimize memory transfers.
- Prefer malloc_device over malloc_shared.
- Inline functions called from kernels.
- Use local memory where possible.
- Keep work groups converged where possible.
- Use the sycl::native namespace (e.g. sycl::native::sin), if the native accuracy is tolerable.







PROFILING SYCL CODE

- Standard Nvidia CLI tools are still available.
- For complex code, it is beneficial to name individual kernels.
 - q.parallel_for<class my_reduce_kernel>(...)





NSYS



- Can be used for tracing.
- For timings, use:
 - nsys-profile --stats=true ./a.out

| CUDA Kerne | 1 Ctation | tions | | | | | | | |
|--------------|------------|-----------------|----------------|---------------------|-----------------|-----------------|--------------|------|---|
| | | | | | | | | | |
| Time(%) | Total Tir | ne (ns) | Instanc | ces Average (| ns) Minimum (r | ns) Maximum | (ns) StdDev | (ns) | Name |
| 87.4 12.6 | | 47,488 6,816 | | 1 47,48 1 6,81 | | | ,488 ,816 | | 0 Typeinfo name for main::[lambda(cl::sycl::handler &) (instance 1)]::operator ()(cl::sycl::handler 0 Typeinfo name for main::[lambda() (instance 1)] |
| UDA Memor | ry Operat: | ion Stat | istics (| (by time): | | | | | |
| Time(%) | Total Tir | ne (ns) | Count | Average (ns) | Minimum (ns) | Maximum (ns) | StdDev (ns) | | Operation Operation |
| 76.2 23.8 | | 11,360 3,552 | 1 | 11,360.0 3,552.0 | 11,360 3,552 | 11,360 3,552 | | | CUDA memcpy HtoD] CUDA memcpy DtoH] |
| CUDA Memor | ry Operat: | ion Stat | istics (| (by size): | | | | | |
| Total (MB | 3) Count | Averag | e (MB) | Minimum (MB) | Maximum (MB) | StdDev (MB) | Operatio | n | |
| 0.13 | | | 0.131 0.000 | 0.131 0.000 | 0.131 0.000 | | [CUDA memcpy | | |





NCU



- Can be used for detailed kernel analysis.
- Example command:
 - ncu --log-file
 my_ncu_output.csv -print-kernel-base
 mangled --details-all
 --csv ./a.out

```
GPU Speed Of Light Throughput","DRAM Frequency","cycle/second","968,720,379.15",
GPU Speed Of Light Throughput", "SM Frequency", "cycle/second", "610,083,784.70",
GPU Speed Of Light Throughput", "Elapsed Cycles", "cycle", "4,121",
GPU Speed Of Light Throughput","Memory [%]","%","2.10",
GPU Speed Of Light Throughput","DRAM Throughput","%","0.78"
GPU Speed Of Light Throughput", "Duration", "nsecond", "6,752"
GPU Speed Of Light Throughput","L1/TEX Cache Throughput","%","1.80",
 GPU Speed Of Light Throughput","Waves Per SM","","0.15"
GPU Speed Of Light Throughput","L2 Cache Throughput","%","2.73",
GPU Speed Of Light Throughput","SM Active Cycles","cycle","1,513.48",
 SPU Speed Of Light Throughput", "Compute (SM) [%]", "%", "0.64",
SpeedOfLight","","","","","SOLBottleneck","WRN","This kernel grid is too small to fill the available resour
 es on this device, resulting in only 0.1 full waves across all SMs. Look at Launch Statistics for more
 aunch Statistics", "Block Size", "", "32",
 aunch Statistics", "Function Cache Configuration", "", "cudaFuncCachePreferNone",
 aunch Statistics", "Grid Size", "", "512",
 aunch Statistics","Registers Per Thread","register/thread","16'
 aunch Statistics", "Shared Memory Configuration Size", "byte", "32,768"
 aunch Statistics","Driver Shared Memory Per Block","byte/block","1,024",
 aunch Statistics","Dynamic Shared Memory Per Block","byte/block","0",
 aunch Statistics","Static Shared Memory Per Block","byte/block","0",
 aunch Statistics","Threads","thread","16,384",
 aunch Statistics", "Waves Per SM", "", "0.15",
 aunch Statistics","sm maximum warps per active cycle pct","%","50",
 aunch Statistics","sm_warps active.avg.pct of peak sustained active","%","6.11",
 ccupancy","Block Size","","32'
 occupancy", "Block Limit SM", "block", "32"
Occupancy","Block Limit Registers","block","128",
 Occupancy", "Block Limit Shared Mem", "block", "164",
 ccupancy","Block Limit Warps","block","64",
Occupancy","Warp Occupancy","","3,670",
Occupancy","Warp Occupancy","","4,512",
 ccupancy", "Warp Occupancy", "", "1,036"
 ccupancy", "Registers Per Thread", "register/thread", "16",
 ccupancy", "Shared Memory Per Block", "byte/block", "1,024"
 Occupancy", "Theoretical Active Warps per SM", "warp", "32",
Occupancý","Theoretical Occupancy","%","50",
Occupancy","Achieved Occupancy","%","6.11",
Occupancy","Achieved Active Warps Per SM","warp","3.91",
Occupancy","","","","Occupancy","WRN","This kernel's theoretical occupancy (50.0%) is limited by the num
ber of blocks that can fit on the SM The difference between calculated theoretical (50.0%) and measured
achieved occupancy (6.1\%) can be the result of warp scheduling overheads or workload imbalances during t
he kernel execution. Load imbalances can occur between warps within a block as well as across blocks of
```





QUESTIONS









Code_Exercises/Exercise_05_Profiling_and_Debugging/source.cpp

Profile and optimize a SYCL reduction implementation.

