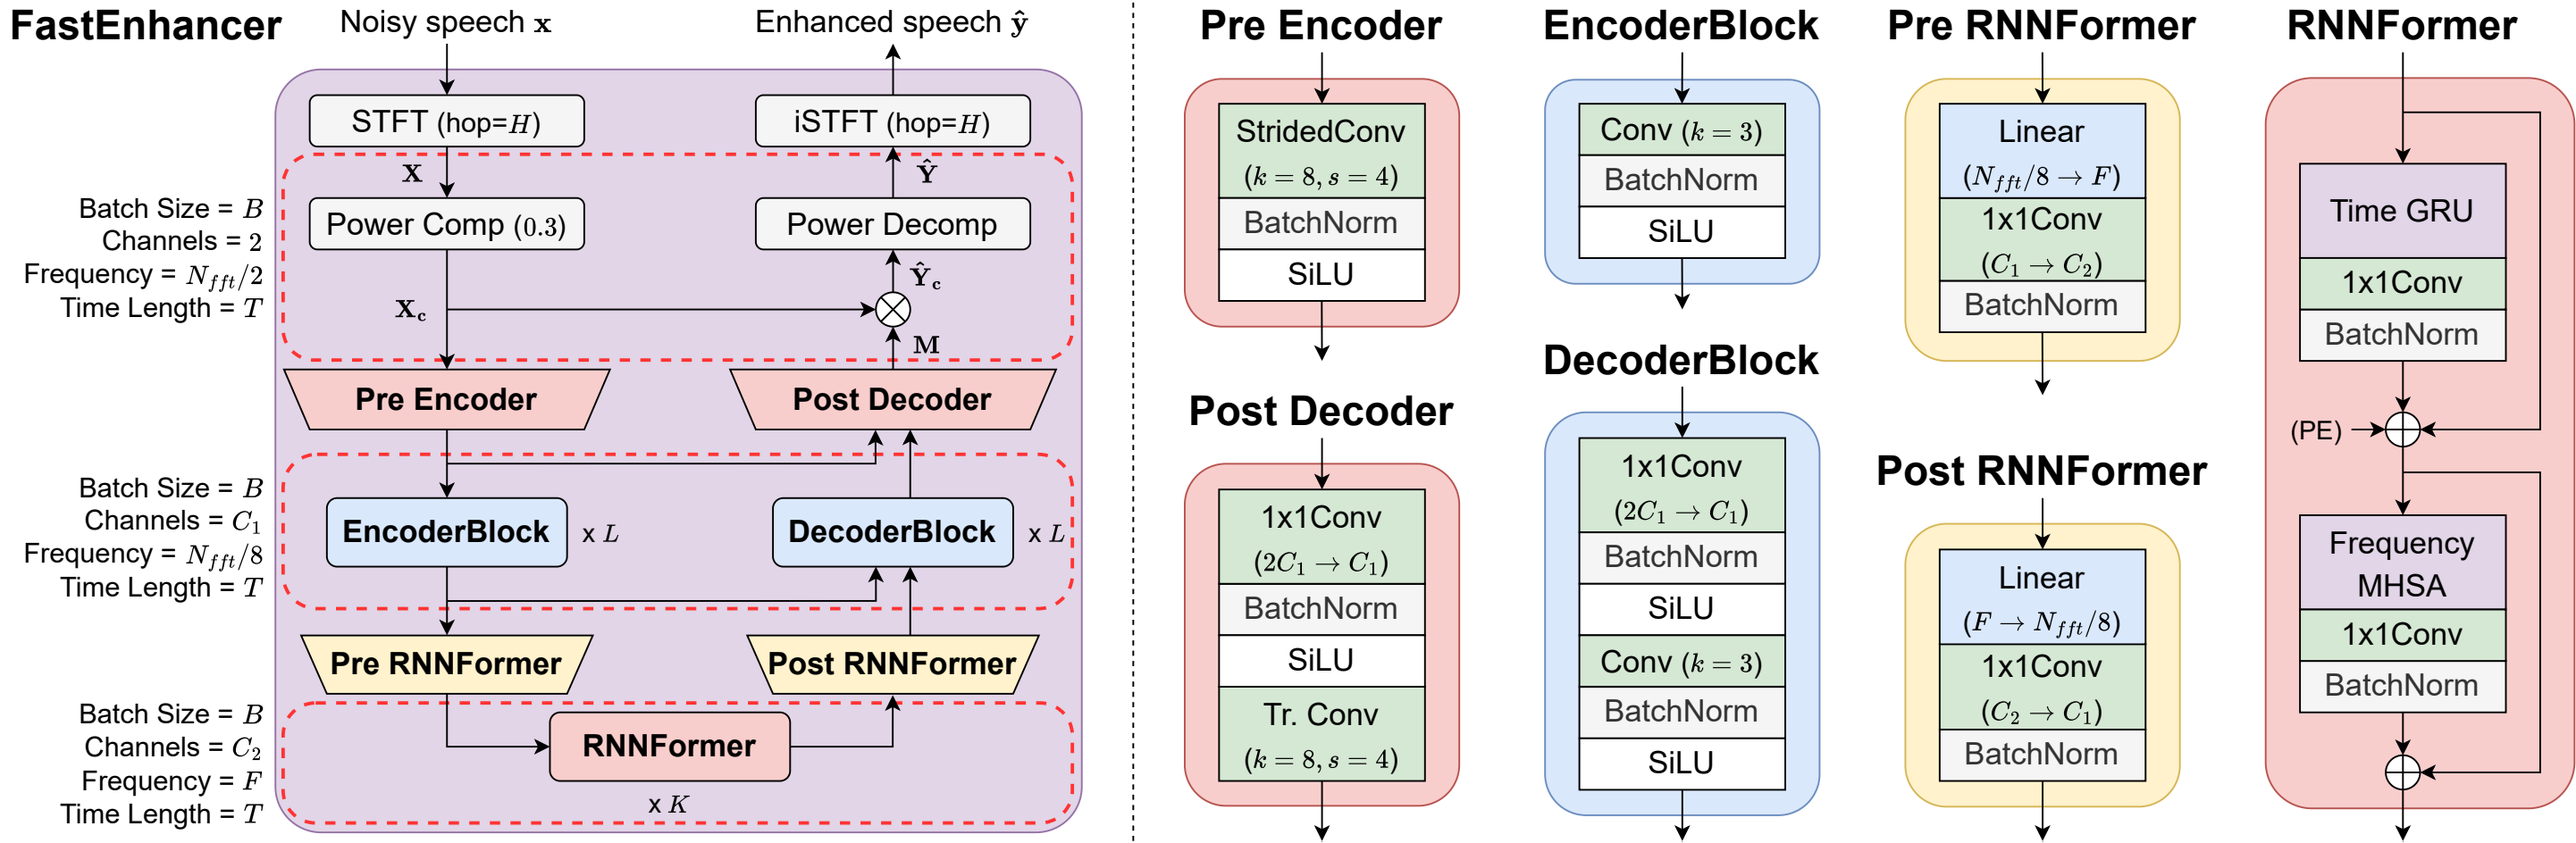
FastEnhancer
Noisy speech $\mathbf{x}$
Enhanced speech $\hat{\mathbf{y}}$
STFT (hop=H)
iSTFT (hop=H)
$\mathbf{X}$
$\hat{\mathbf{Y}}$
Power Comp (0.3)
Power Decomp
$\mathbf{X_c}$
$\hat{\mathbf{Y}}_\mathbf{c}$
$\mathbf{M}$
Pre Encoder
Post Decoder
EncoderBlock
x L
DecoderBlock
x L
Pre RNNFormer
Post RNNFormer
RNNFormer
x K
Batch Size = B
Channels = 2
Frequency = $N_{fft}/2$
Time Length = T
Batch Size = B
Channels = C_1
Frequency = $N_{fft}/8$
Time Length = T
Batch Size = B
Channels = C_2
Frequency = F
Time Length = T
Pre Encoder
StridedConv
($k=8, s=4$)
BatchNorm
SiLU
Post Decoder
1x1Conv
($2C_1 \rightarrow C_1$)
BatchNorm
SiLU
Tr. Conv
($k=8, s=4$)
EncoderBlock
Conv ($k=3$)
BatchNorm
SiLU
DecoderBlock
1x1Conv
($2C_1 \rightarrow C_1$)
BatchNorm
SiLU
Conv ($k=3$)
BatchNorm
SiLU
Pre RNNFormer
Linear
($N_{fft}/8 \rightarrow F$)
1x1Conv
($C_1 \rightarrow C_2$)
BatchNorm
Post RNNFormer
Linear
($F \rightarrow N_{fft}/8$)
1x1Conv
($C_2 \rightarrow C_1$)
BatchNorm
RNNFormer
Time GRU
1x1Conv
BatchNorm
(PE)
Frequency MHSA
1x1Conv
BatchNorm