

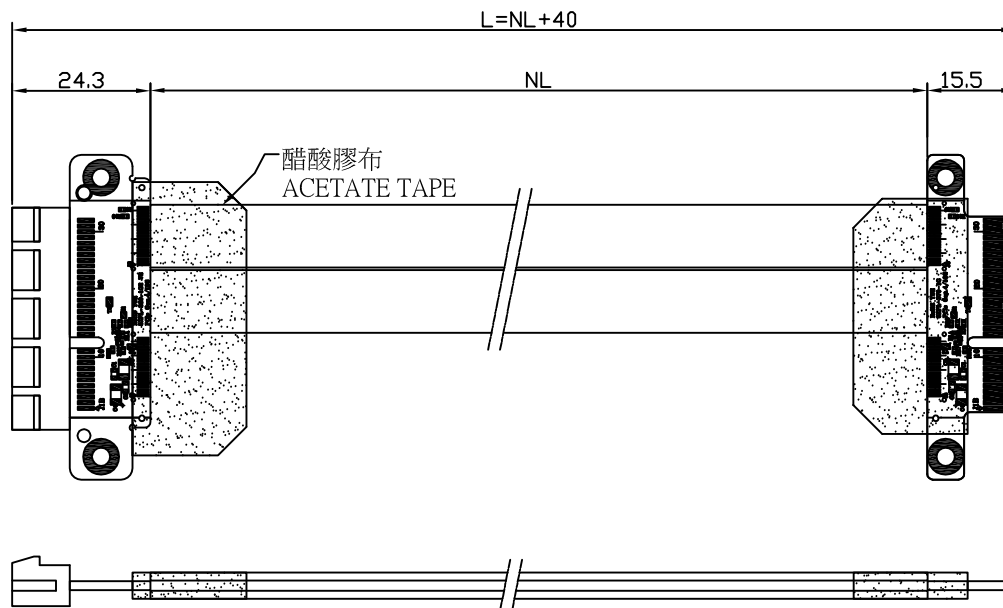


A  
  
  
B  
  
  
C  
  
  
D  
  
  
E

CN2  
PCIe 4X  
64F Connector  
5XPL-369-1G3

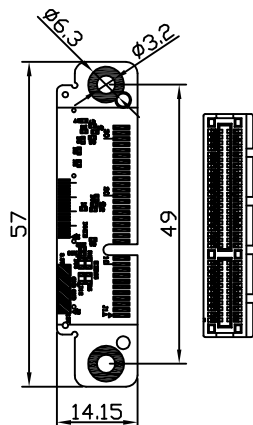

CN1  
PCIe 4X 64M  
Golden Finger  
5XPL-370-1G3

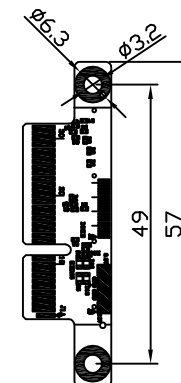


CABLE: UL21099/UL21283/UL21425/UL22112  
/EQUIVALENT 30AWG CABLE  
BLACK PE JACKET

NOTE:

- Support Gen.4 when  $NL \leq 50 \sim 60\text{cm}$ .  
Support Gen.3 when  $NL \leq 100 \sim 120\text{cm}$ .  
However, different devices might result in different performances.
- 線材須以醋酸膠布固定.固定方式:  
To tidy up the cables, acetate tapes will be spaced:  
(a)  $NL \leq 30\text{cm}$   
不須貼醋酸膠布 / need no acetate tape  
(b)  $31\text{cm} \leq NL \leq 60\text{cm}$   
置中貼醋酸膠布1PCE / in the middle  
(c)  $61\text{cm} \leq NL \leq 90\text{cm}$   
等距貼醋酸膠布2PCS / at 1/3 and 2/3 intervals  
(d)  $91\text{cm} \leq NL$   
置中貼醋酸膠布1PCE / 左右等距各1PCE  
one in the middle / at 1/4, 1/2 and 3/4 intervals

| REV. | ZONE | DESCRIPTION | DATE | REVISER | APPD |
|------|------|-------------|------|---------|------|
|      |      |             |      |         |      |

| L<br>(mm)                                                                                                                  | NL<br>(mm) | Part No.              |
|----------------------------------------------------------------------------------------------------------------------------|------------|-----------------------|
|                                                                                                                            | 150±10     | 5G64B02-10190         |
| 250±10                                                                                                                     |            | 5G64B02-10250         |
|                                                                                                                            | 300±15     | 5G64B02-10340         |
| 500±20                                                                                                                     |            | 5G64B02-10500         |
|                                                                                                                            | 500±20     | 5G64B02-10540         |
|                                                                                                                            | 800±20     | 5G64B02-10840         |
|  高位企業有限公司<br>Yes Way Enterprise Corp. |            | TOLERANCE UNSPECIFIED |
|  SCALE<br>1 : 1                       |            | UNIT<br>mm            |
| NAME<br>PCIe X4,Gen 3/4<br>Extension Cable                                                                                 |            | SHEET<br>1 / 2        |
| DRAWING NO.<br>5G64B02-1xxxx                                                                                               |            | REV<br>A0             |
| RoHS product                                                                                                               |            | A3                    |
|                                                                                                                            |            |                       |

A  
  
  
B  
  
  
C  
  
  
D  
  
  
E

