



NGFF Conn. H=4.2mm

REV.	ZONE	DESCRIPTION	DATE	REVISER	APPD
A1		移除CN3 & 接點修正	230825	JOHANNA	
A2		CN1 & 接點修正	231116	JOHANNA	

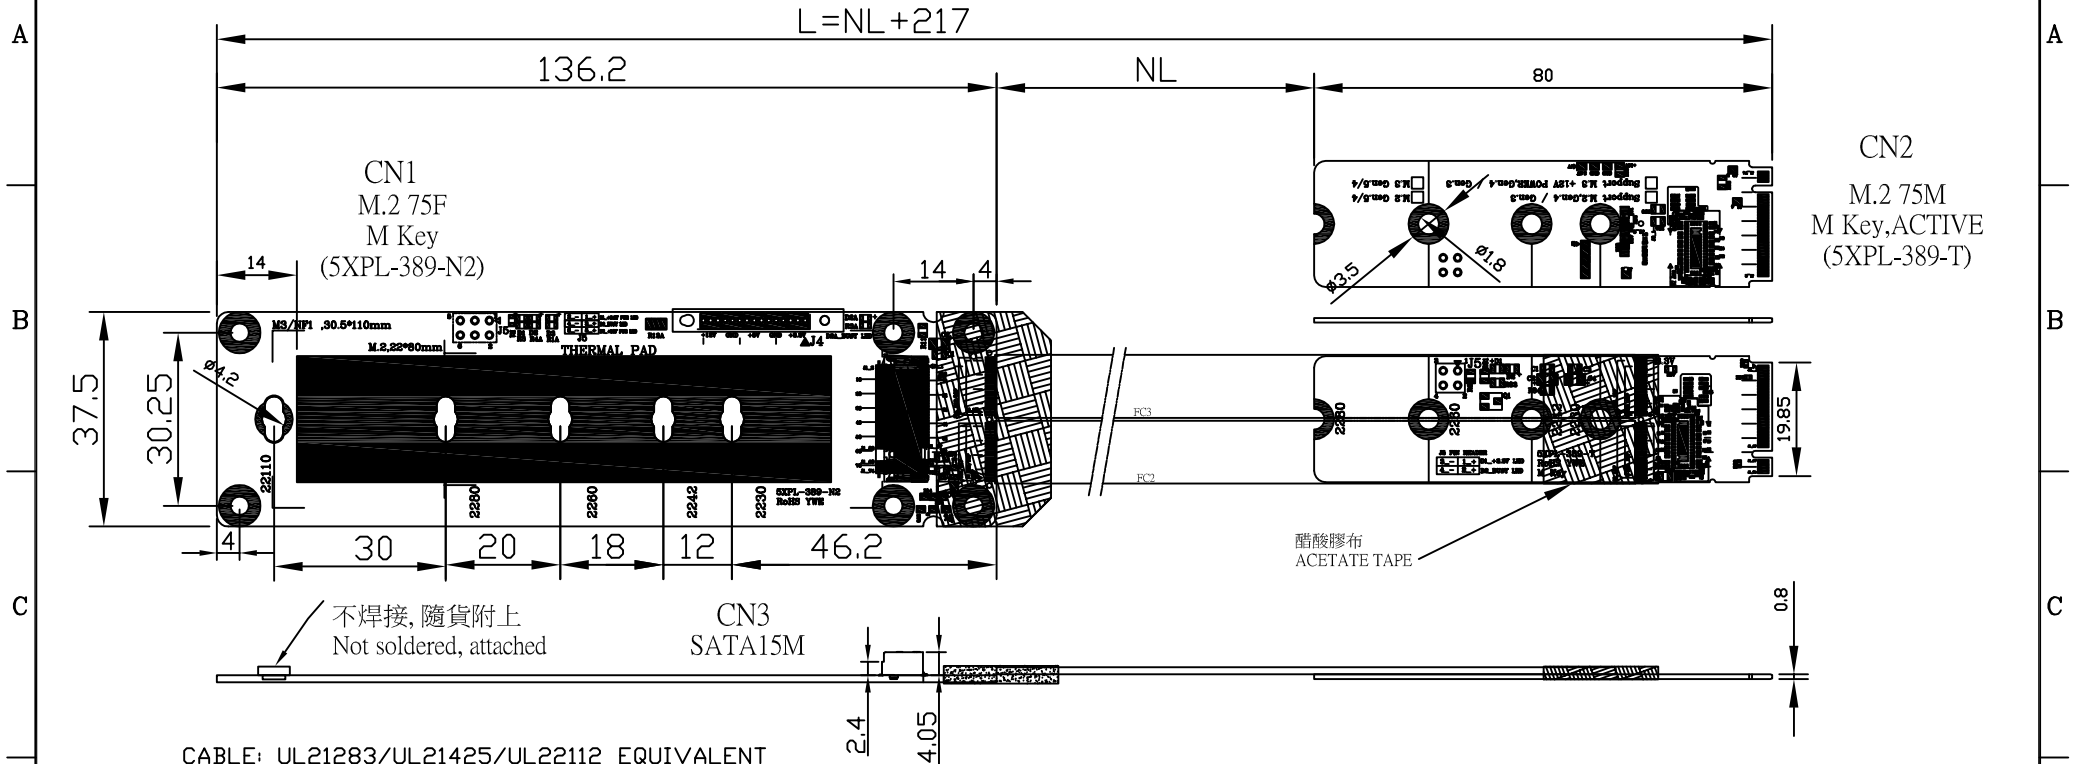

CABLE: UL21283/UL21425/UL22112 EQUIVALENT
30AWG 21C CABLE, BLACK PE JACKET

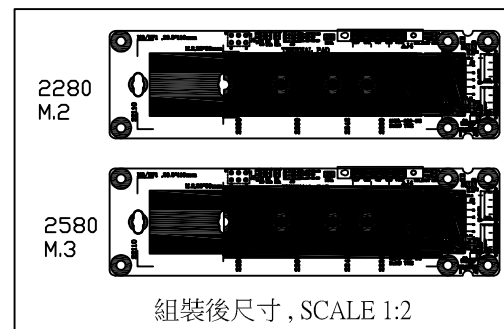

組裝後尺寸, SCALE 1:2

NOTE:

1. 螺母與螺絲單包隨貨附
2. Support Gen.4 when $NL \leq 90 \sim 120 \text{ cm}$, 依 REDRIVER 增益設定.
Support Gen.3 when $NL \leq 150 \sim 175 \text{ cm}$, 依 REDRIVER 增益設定.
However, different devices might result in different performances.
3. 線材須以醋酸膠布固定, 固定方式: (To tidy up the cables, acetate tapes will be spaced:)
- (a) $NL \leq 30 \text{ cm}$, 不須貼醋酸膠布 / (need no acetate tape)
- (b) $30 \text{ cm} < NL \leq 60 \text{ cm}$, 置中貼醋酸膠布1PCE / (in the middle)
- (c) $61 \text{ cm} < NL \leq 90 \text{ cm}$, 等距貼醋酸膠布2PCS / (at 1/3 and 2/3 intervals)
- (d) $91 \text{ cm} < NL$, 置中貼醋酸膠布1PCE/左右等距各1PCE / (one in the middle / at 1/4, 1/2 and 3/4 intervals)

	500±15	5G75C02-10717
	600±15	5G75C02-10817
	800±20	5G75C02-11017
	950±20	5G75C02-11167
	1000±20	5G75C02-11217
	1100±30	5G75C02-11317
L (mm)	NL (mm)	Part No.

 高位企業有限公司 <i>Yes Way Enterprise Corp.</i>		TOLERANCE UNSPECIFIED .000 ± .00 ± .0 ± ±	
 		SCALE 1 : 1	UNIT mm
NAME G4 M.2 M KEY 75F - 75M,Active Cable		SHEET 1 / 2	DRAWN 1/15/2025 Johanna
			DESIGNER Reo
DRAWING NO. 5G75C02-1xxxx		REV A2	CHECKED Jenny
			APPROVED Tim
RoHS product		A3	

RoHS product

