
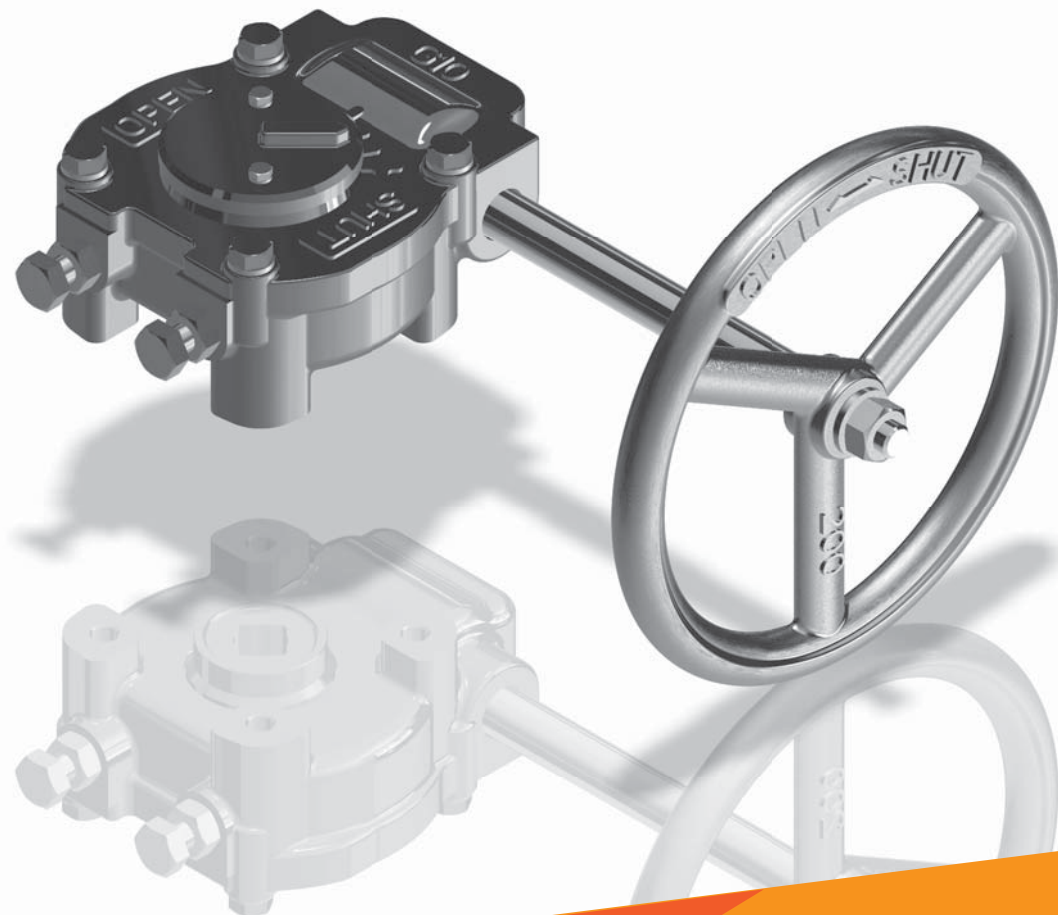


HIPPO in the fluid world.

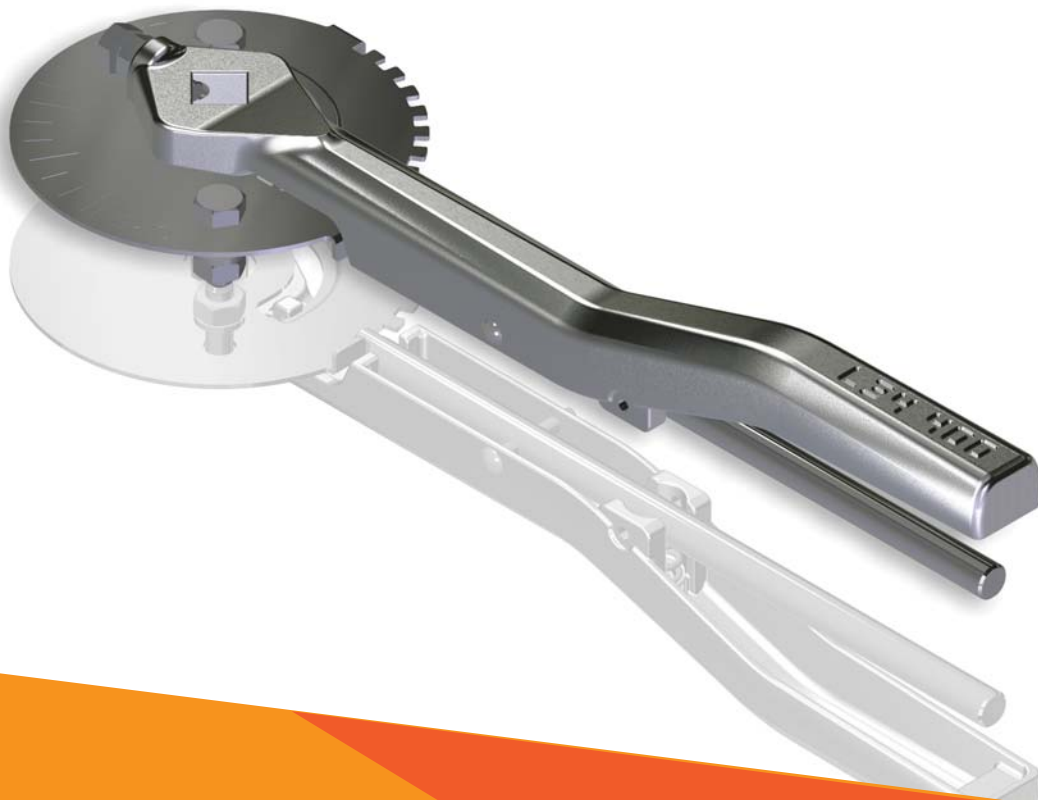

Control /Double Offset/Triple Offset Butterfly

239 No.17, Ln.29, Sanying Rd., Yingge Dist.,

New Taipei City, Taiwan (R.O.C.)

Tel: +886-2-35012626

Fax: +886-2-35012727

Web: <http://www.hippovalve.com/>

Mail: sales@hippovalve.com

Copyright © 2014 - HippoValve Co., Ltd. All Rights Reserved.

HIPPO Accessories

G / L Series Manual Actuator
Gear Lever

www.hippovalve.com

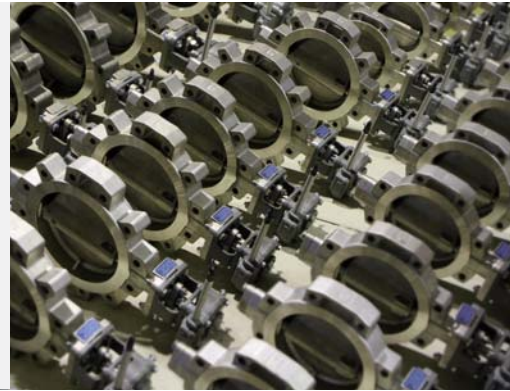


TABLE OF CONTENTS

■ G-Series Quarter-turn Gearboxes

■ L-Series Quarter-turn Levers

■ Company Profile

HIPPO Valve Co., Ltd. is a TUV ISO 9001 certified professional High Performance Double-Offset Butterfly Valve and Triple-Offset Metal Seated Butterfly Valve manufacturer.

With more than 40 years experience in butterfly valve and other related products, our engineering teams have had served lots industries as chemistry, pulp and paper, petrochemical, air separator, HVAC, energy and power plant, and water treatment.

■ Quality Responsibility

"Building New Generation High Performance Valves"

With this vision, we work hard all the day, all the time. It is not only a statement, but a target to push us devote all our passion and knowledge to a perfect integration of 40 years experience and valve engineering. HIPPO Valve utilizes latest engineering design software PTC Creo Parametric, modern 3D CAD simulation, and advanced CNC devices. All above capabilities are fused and 100% implemented in our production. **HIPPO VALVE, your very trusted vendor.**



Taipei, Taiwan

40 YEARS

VISION&MISSION

"It's all about quality.
There is always a better way."

**100%
Made In Taiwan**

G-Series Quarter-turn Gearboxes



FEATURES


IP68 Outdoor Protection

All potential leaking faces, including component joints and body-to-cover seams, are fully sealed by O-ring and water-proof glue. More than enough for harsh environment.




Patented Quick-Disassembly

A robust actuator works for a long life. A long life working always meets and requires maintenance. HIPPO's patented quick-disassembly capability makes maintenance simple and easy.

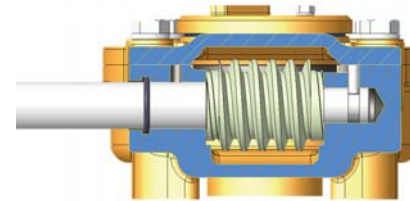

Prefect Strength Latest Modern Design

A solid 3D CAD modeling made with FEMA and Six-sigma ensures the client requirements are maximum fulfilled by best design and precious machining.

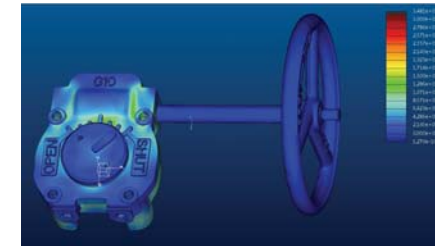

ISO Mounting

HIPPO Valve designed actuator according to global standard ISO 5211 mounting. The HIPPO G-series quarter-turn gearbox can be assembled with any quarter-turn valve, which have ISO mounting, through HIPPO accessory yoke.




Fire-safe Reliability

G-series passed the fire-safe testing, certified by notified body, with HIPPO Valve according to API607 and ISO 10497. This outstanding capability guarantee nothing but reliability even after 1000°C burning.




DIMENSIONS

Three View Drawing

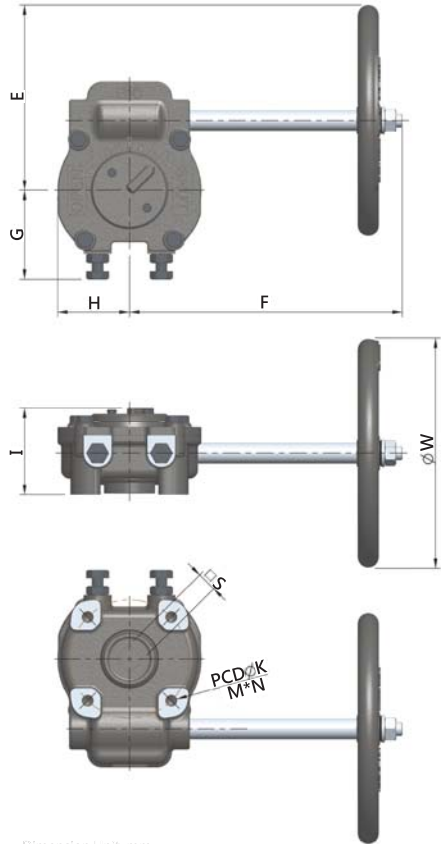

Dimension Unit: mm

MODEL	K	M	N	E	F	G	H	I	J	W	◇S	GEAR RATIO	MAX.OUTPUT TORQUE (Nm)	WEIGHT (kg)
G07	70	M8	4	97	133	66	49	72	34	100	11 14 17 19	40:1	250	2.6
G10	102	M10	4	161	236	77	62	76	36	200	17 19 22 27	40:1	500	5.5
G12	125	M12	4	183	236	94	84	89	39	200	22 27 32 36 46	60:1	1000	8.7
G14	140	M16	4	257	324	120	110	106	50	300	36 46 55	64:1	2000	17.9
G16	165	M20	4	352	374	153	162	126	58	400	36 46 55	96:1	4000	36.5
G25	254	M16	8	512	446	185	232	146	65	600	36 46 55	125:1	8000	70

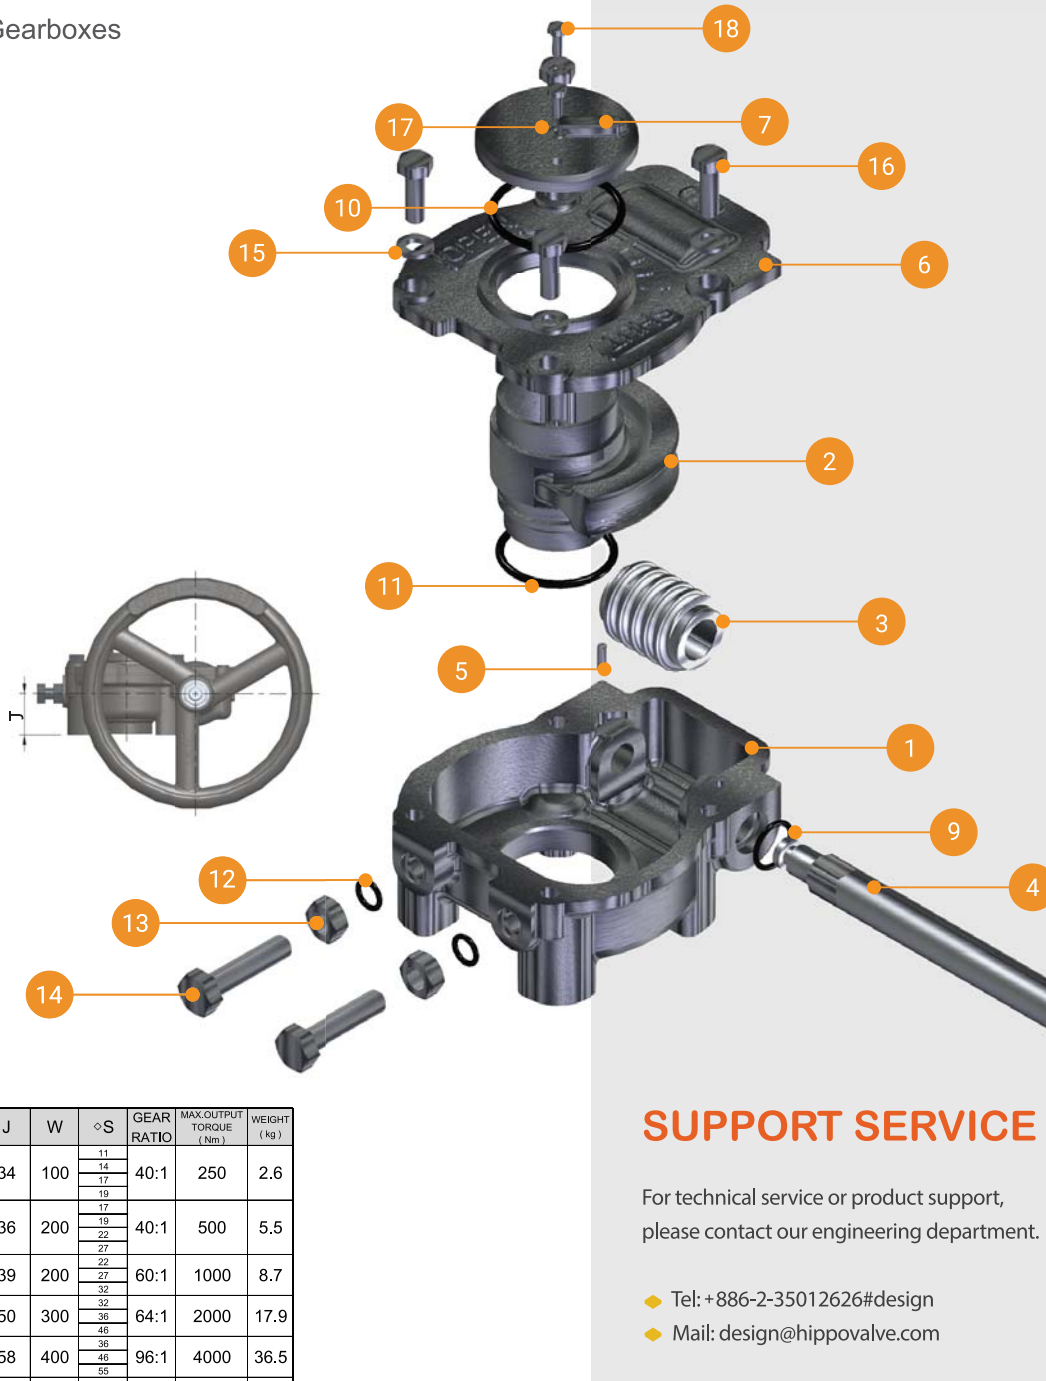

BILL OF MATERIALS

NO.	PART NAME	QTY	MATERIAL
1	Body	1	A126 Cl. B
2	Worm Gear	1	A536 Gr. 80-55-06
3	Worm	1	A29 Gr. 1055
4	Shaft	1	A182 Gr. F6a
5	PIN	1	A29 Gr. 1045
6	Cover	1	A126 Cl. B
7	Position Indicator	1	A126 Cl. B
8	Wheel	1	A126 Cl. B
9	O-Ring	2	NBR
10	O-Ring	1	NBR
11	O-Ring	1	NBR
12	O-Ring	2	NBR
13	Hex Nut	2	A307
14	Hex Bolt	2	A307 Gr. B
15	Spring Washer	4	Spring Steel
16	Hex Bolt	4	A307 Gr. B
17	Spring Washer	2	Spring Steel
18	Hex Bolt	2	A307 Gr. B
19	Round Flat Washer	1	A36
20	Hex Nut	1	A307

Superior Worm Shaft

Robust square head forces the shaft never leave the worm.




SUPPORT SERVICE

For technical service or product support, please contact our engineering department.

- ◆ Tel: +886-2-35012626#design
- ◆ Mail: design@hippvalve.com




L-Series Quarter-turn Levers

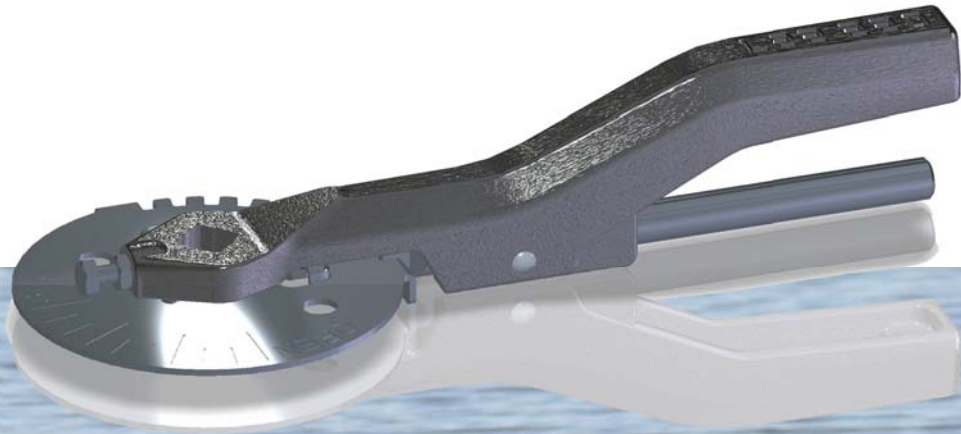

FEATURES


Patented Anti-loose Locker

A vice-directional locker is designed to prevent lever drop. Even if the screw loose due to any reasons, still HIPPO's lever stays in original position.



Lockable Positioner

A spring locker is built with HIPPO's 10 of adjustable indicator. A wonderful design makes lever easy to use and avoid unexcepted movement.

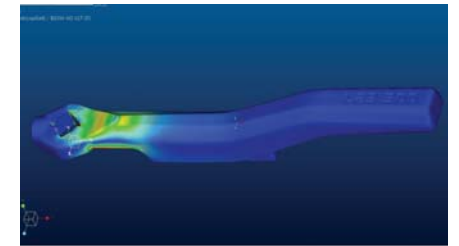

More Than Enough Strength Latest Modern Design

A solid 3D CAD modeling made with FEMA and Six-sigma ensures the client requirements are maximum fulfilled by best design and precious machining.



ISO Mounting

HIPPO Valve designed actuator according to global standard ISO 5211 mounting. The HIPPO L-series quarter-turn lever can be assembled with any quarter-turn valve, which have ISO mounting, through HIPPO accessory yoke.



Ergonomics Design

L-series is designed with ergonomic engineering. The streamlined lever shape is perfectly suitable for every day operations. Easy to handle, hard to slip. A wonderful comfort.



DIMENSIONS

Three View Drawing

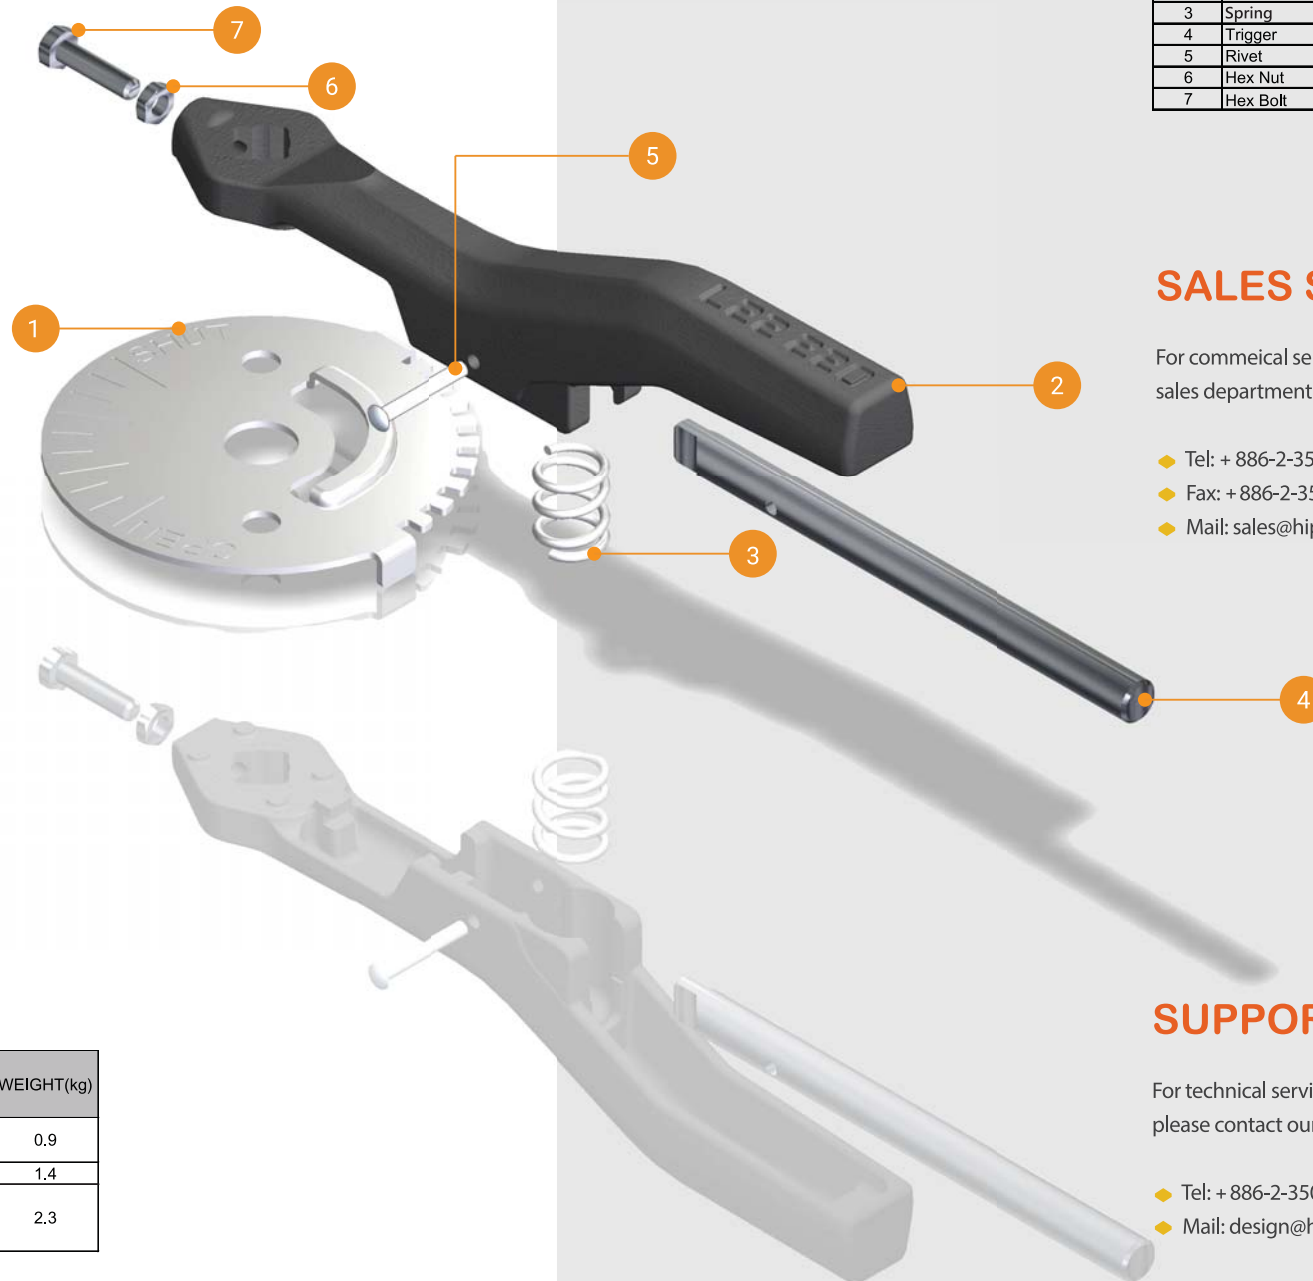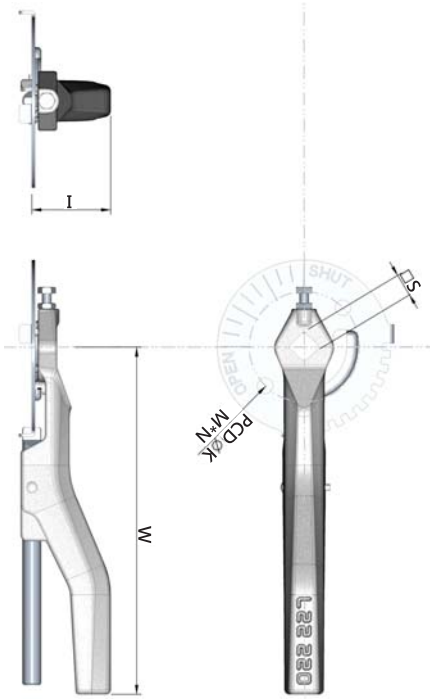

Dimension Unit: mm

MODEL	K	M	N	I	W	φS	MAX.INPUT TORQUE (Nm)	WEIGHT(kg)
L22	70	10	2	50	220	11 14	125	0.9
L23	70	10	2	50	300	17 19	250	1.4
L34	102	12	2	55	400	22 27	500	2.3

BILL OF MATERIALS

NO.	PART NAME	QTY	MATERIAL
1	Indicator	1	A182 Gr. F6a
2	Lever	1	A536 Gr. 65-45-12
3	Spring	1	A182 Gr. F304
4	Trigger	1	A182 Gr. F6a
5	Rivet	1	A182 Gr. F304
6	Hex Nut	1	A307
7	Hex Bolt	1	A307 Gr. B

SALES SERVICE

For commercial service, please contact our sales department.

- ◆ Tel: + 886-2-35012626
- ◆ Fax: + 886-2-35012727
- ◆ Mail: sales@hippovalve.com

SUPPORT SERVICE

For technical service or product support, please contact our engineering department.

- ◆ Tel: + 886-2-35012626#design
- ◆ Mail: design@hippovalve.com