

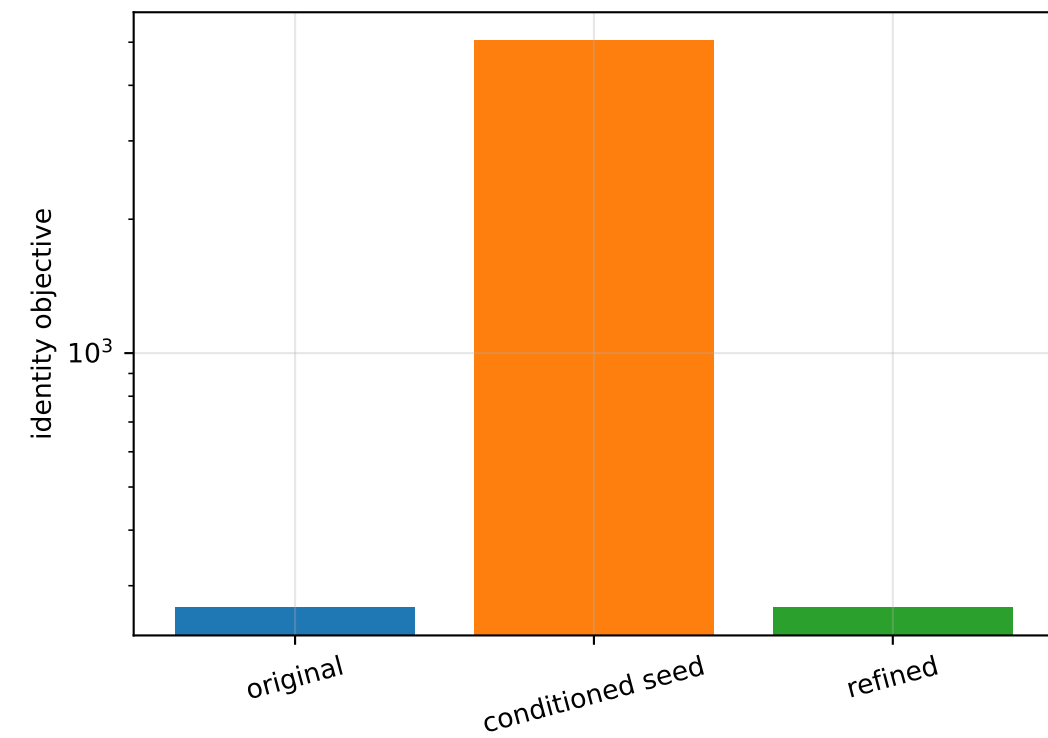
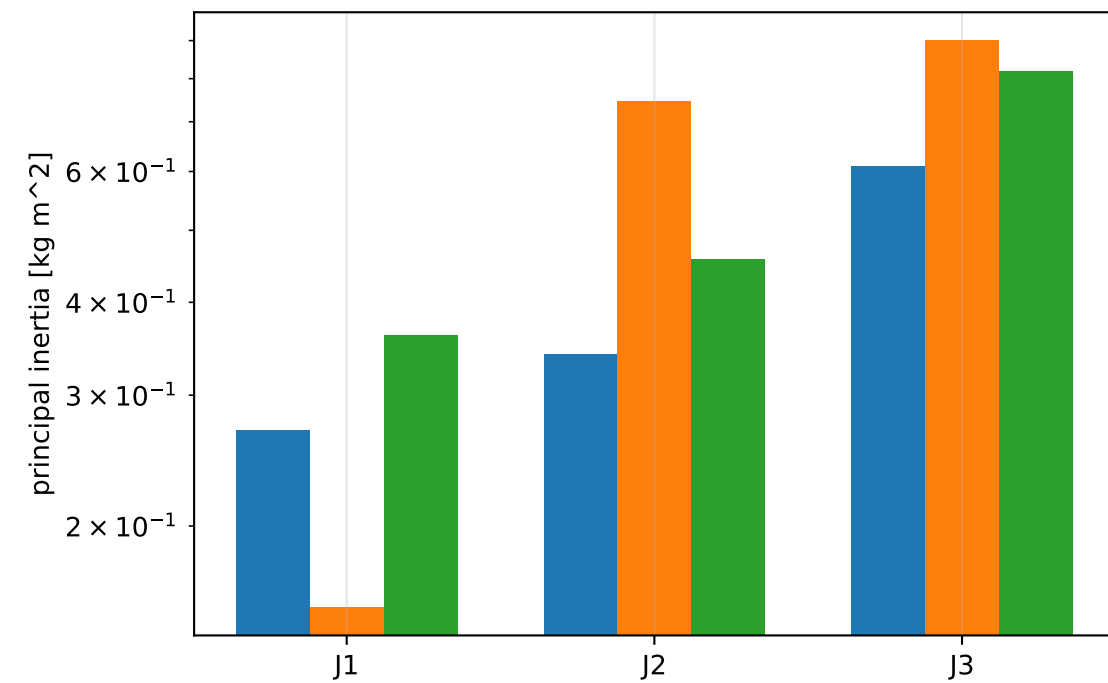
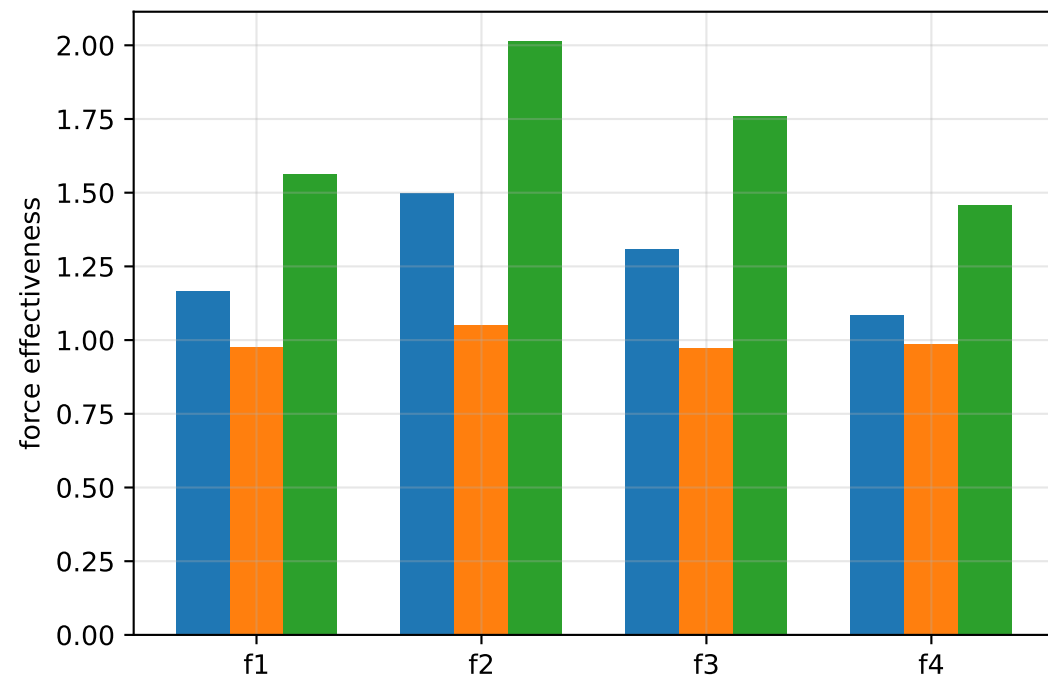
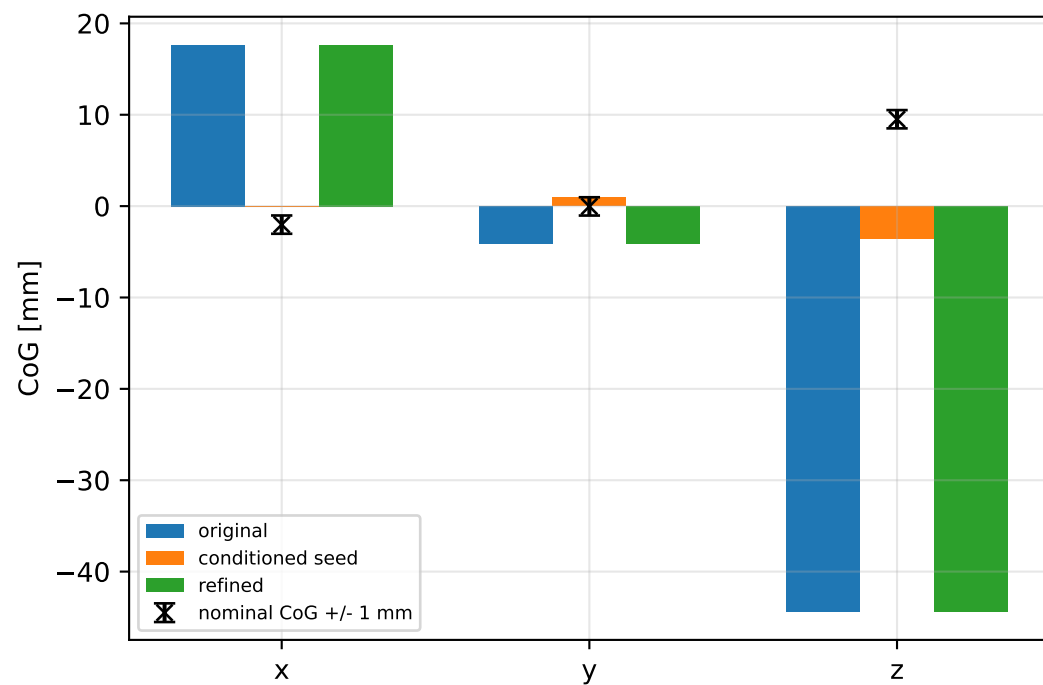


single_rosbag_1: original / conditioned / refined

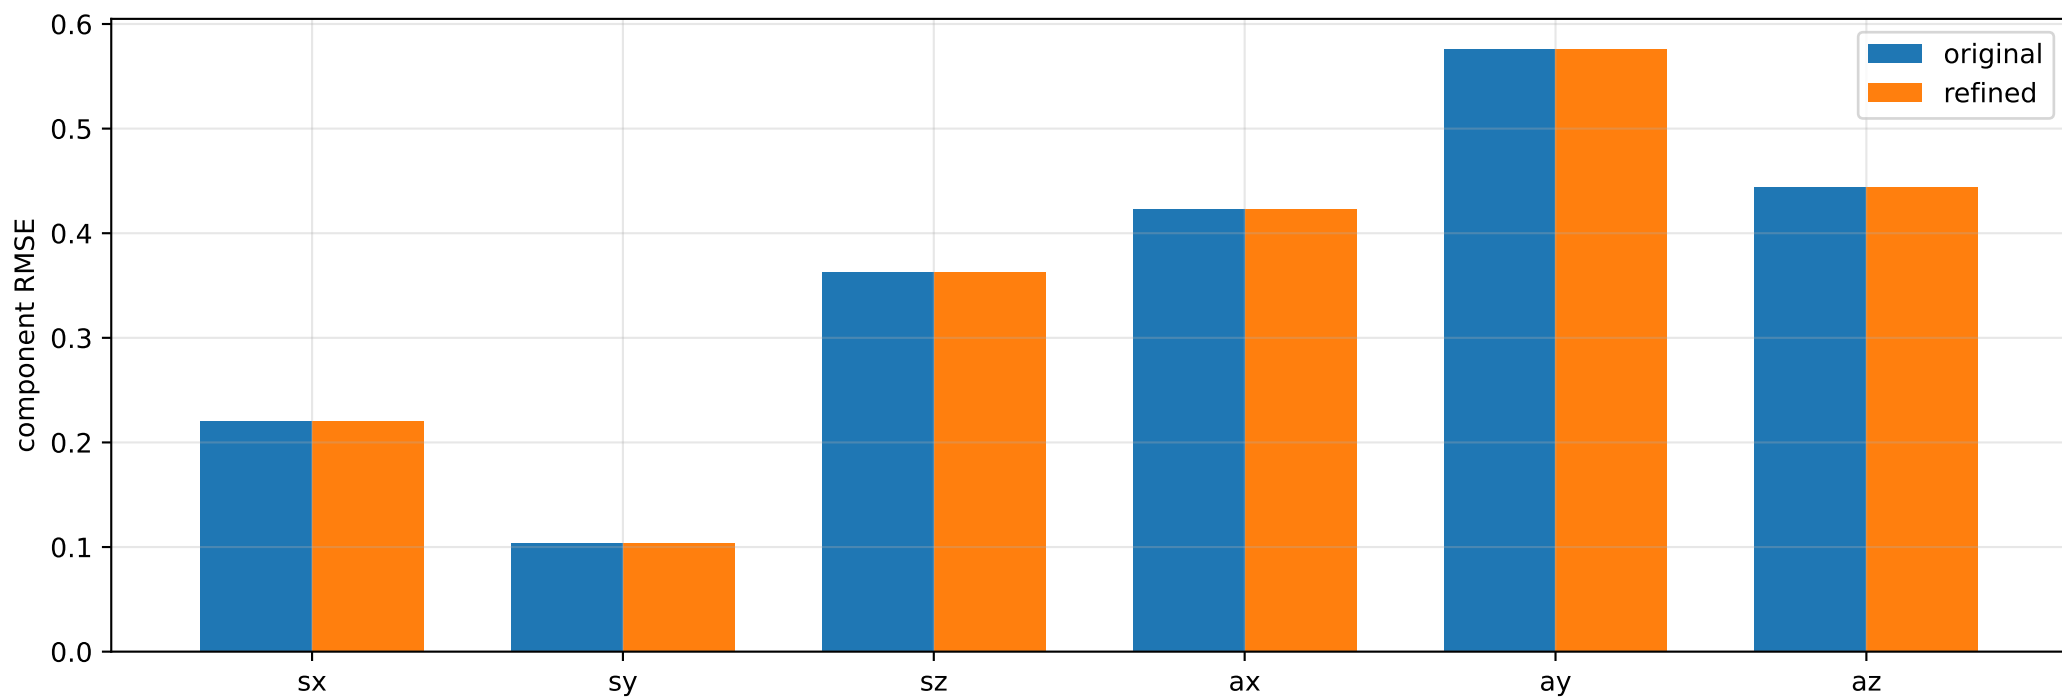

single_rosbag_1: prior-free fit and rotor lag (0.1971992 -> 0.1971992 s)

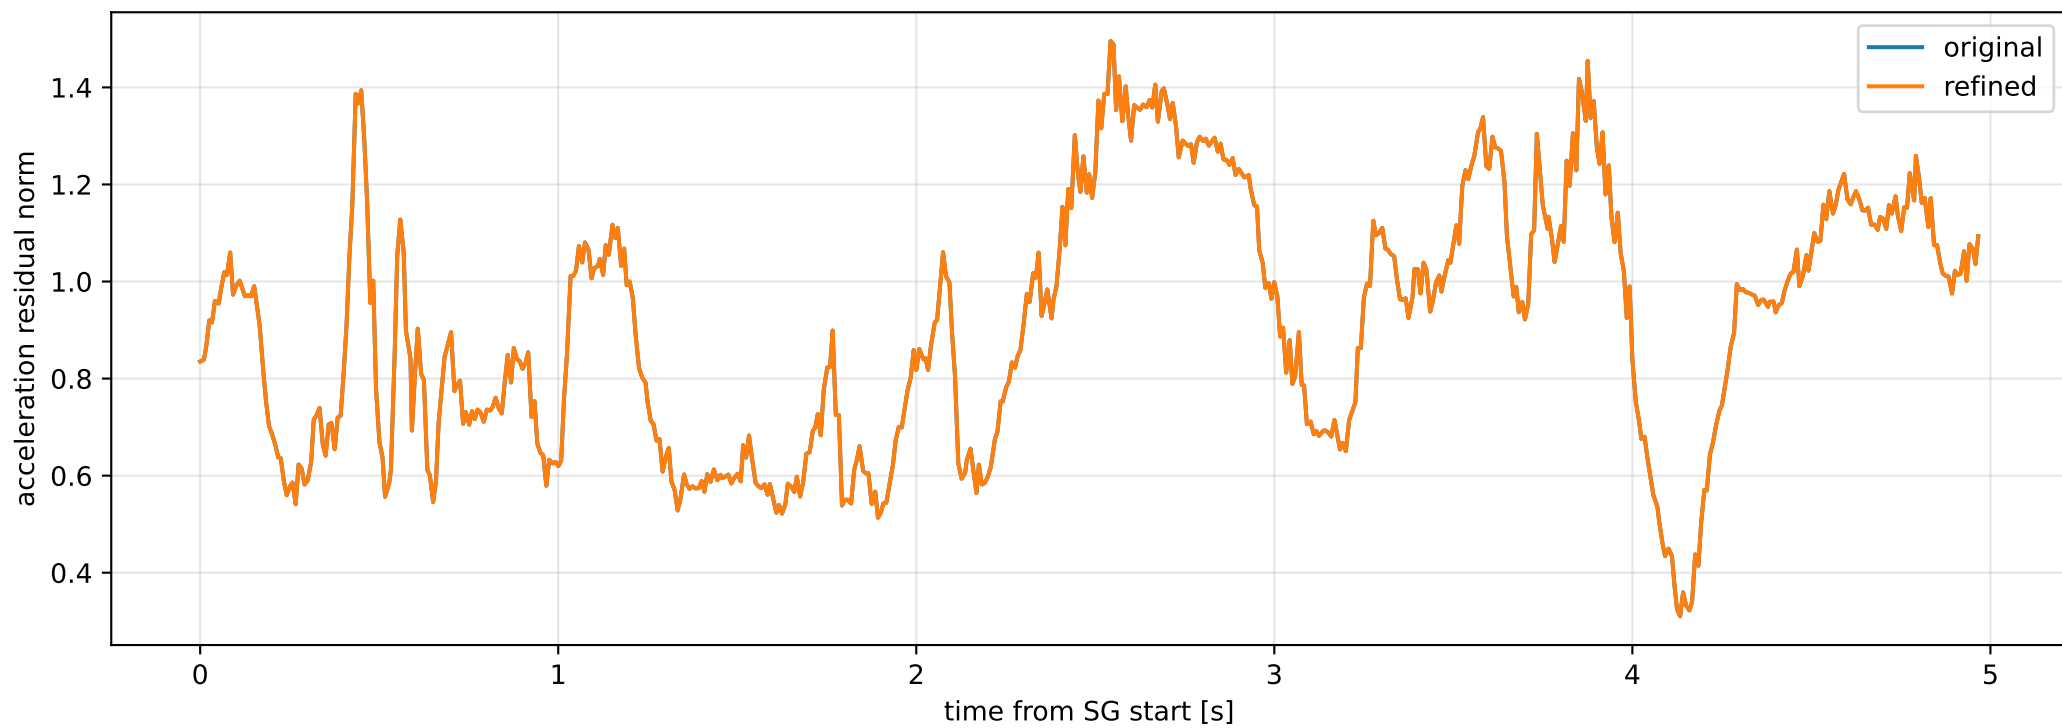

single_rosbag_1: experiment definition and result

CoG-conditioned reseed and prior-free full refinement

The CoG Gaussian prior is used only to condition the saved joint distribution and generate a nonlinear refinement initialization. The refinement objective is the unchanged prior-free pose-derived data objective. CoG, inertia, force effectiveness, and rotor lag remain free during refinement.

No MAP term, CoG fixing, inertia fixing, force fixing, or lag fixing is used.
The conditioned covariance is not passed to the optimizer.

objective original / seed / refined:
268.528886616 / 5042.53581551 / 268.528379121
delta refined-original: -0.00050749498979

J/m original:
[[1.01580540e-01 -1.22880371e-04 -1.64915634e-02]
[-1.22880371e-04 7.73554236e-02 9.52257990e-06]
[-1.64915634e-02 9.52257990e-06 1.71547962e-01]]
J/m conditioned:
[[0.32935777 -0.0005038 -0.02451805]
[-0.0005038 0.27330748 -0.01470978]
[-0.02451805 -0.01470978 0.0605206]]
J/m refined:
[[1.01586014e-01 -1.22040835e-04 -1.65014623e-02]
[-1.22040835e-04 7.73555157e-02 9.91673195e-06]
[-1.65014623e-02 9.91673195e-06 1.71547636e-01]]