


	Product code: PMV11	
	Product name: Variable message sign, with options	
	Created: 06/06/2008	By: D. Saint-Cyr
	Revised: 03/02/2017	By: JA Roche
Technical sheet		Comment: _____

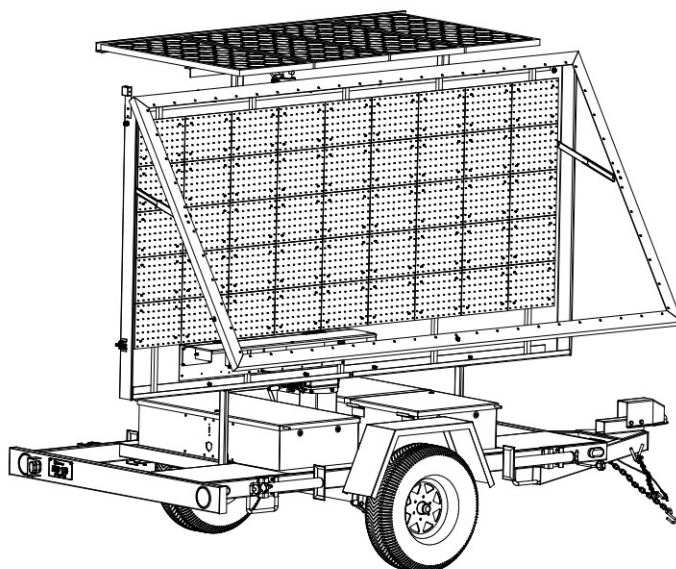

Overall dimensions:

Total length *: 176" (4470mm)
Total width *: 80.5" (2045mm)

Sign length: 130" (3302mm)
Sign height: 67 1/4" (1708mm)
Sign thickness: 4" (102mm)

Total height min. **: 112" (2844mm)
Total height max. **: 160" (4064mm)
Total height max. ***: 195" (4953mm)

Approx. weight: 3476 lbs (1580 kg)

*: electronic sign turned lengthwise (for transport)
**: solar panel not tilted
***: solar panel tilted at 60°

Electrical specifications

- 30 x 72 pixel matrix showing three-line messages of twelve capital letters and/or a pictogram:
 - 4 LEDs per pixel, amber, 5000 mcd per LED.
 - Viewing angle: $\pm 7.5^\circ$ (15° total).
 - Visible at 500 m.
- 12 VDC power from up to 16 batteries (6 V / 220 Ah each, 1760 Ah in total, 14 days of autonomy without sun).
- Batteries charged by up to 4 solar panels of 85 W, mounted on a frame that swivels and tilts.
- Remote message management and diagnostics by cellular modem.
- Reflectors compliant with the Highway Safety Code.
- Electrical cables run inside the frame or a metal part.

Mechanical specifications

- Electronic sign and solar panels mounted on a mast raised by a hydraulic cylinder; mast rotates 180°.
- Solar panels turned mechanically and tilted by a hydraulic cylinder.
- 3/16" polycarbonate protective screen.
- Trailer with a 2" ball hitch coupled to hydraulic brakes, a 5200 lb axle, and four 15" jacks.
- Standard anti-theft protection:
 - Cylinder key locks on the battery boxes.
 - Anti-theft hardware on the solar panel mounts.
- Standard orange paint finish, other colours on request (sign frame in black).
- 15" wheels.

	Product code: PMV11	
	Product name: Variable message sign, with options	
	Created: 06/06/2008	By: D. Saint-Cyr
	Revised: 03/02/2017	By: JA Roche
Technical sheet		<u>Comment:</u> _____

Options

- | | |
|--|------------------------------|
| • 4 extra batteries, 6V / 2x220Ah | PMVXXOP-BAT4 |
| • 8 extra batteries, 6V / 2x220Ah | PMVXXOP-BAT8 |
| • 20A charger | PMVXXOP-CHG |
| • HSPA 3G/GPS modem, Sierra Wireless GX400 | PMVXXOP-MOD |
| • Doppler radar | PMVXXOP-RAD |
| • 1 extra 100W solar panel | PMVXXOP-SOL |
| • Radar statistics software | SLO10 |
| • NTCIP software for VMS | SLO11 |
| • 2" tandem ball for trailer | OP-A27 |
| • Lock for 2" ball hitch | PR2030 |
| • Choice of frame colour | |

Spare parts

- | | | | |
|------------------------|------------------------|---------------------------------|------------------------|
| • Display board 8"x 6" | CES134 | • Cellular (depending on model) | PR40XX |
| • Controller board | CES121 | • Antenna (depending on model) | PR40XX |
| • Power board | CES943 | • 85W solar panel | PS1010 |