
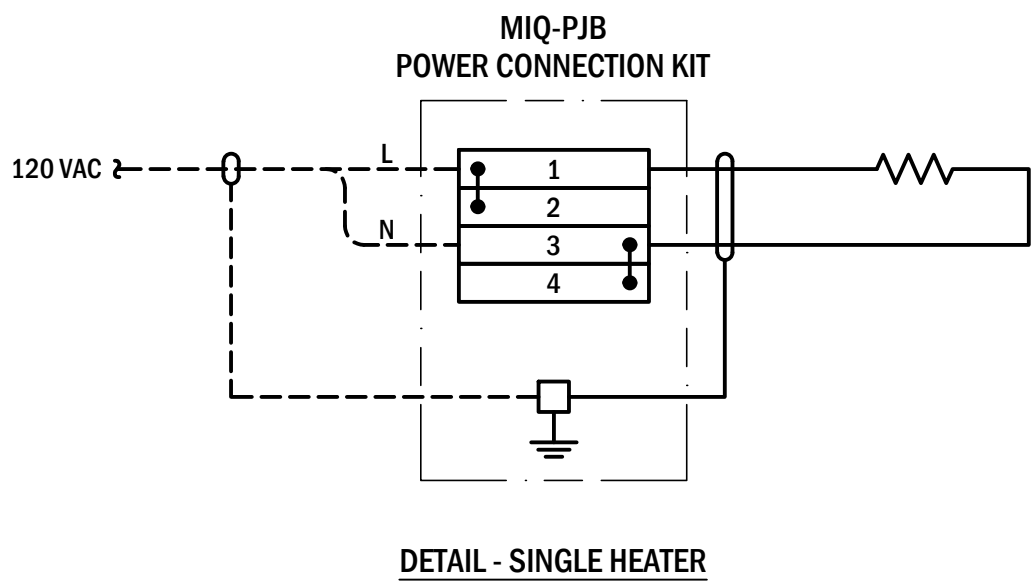
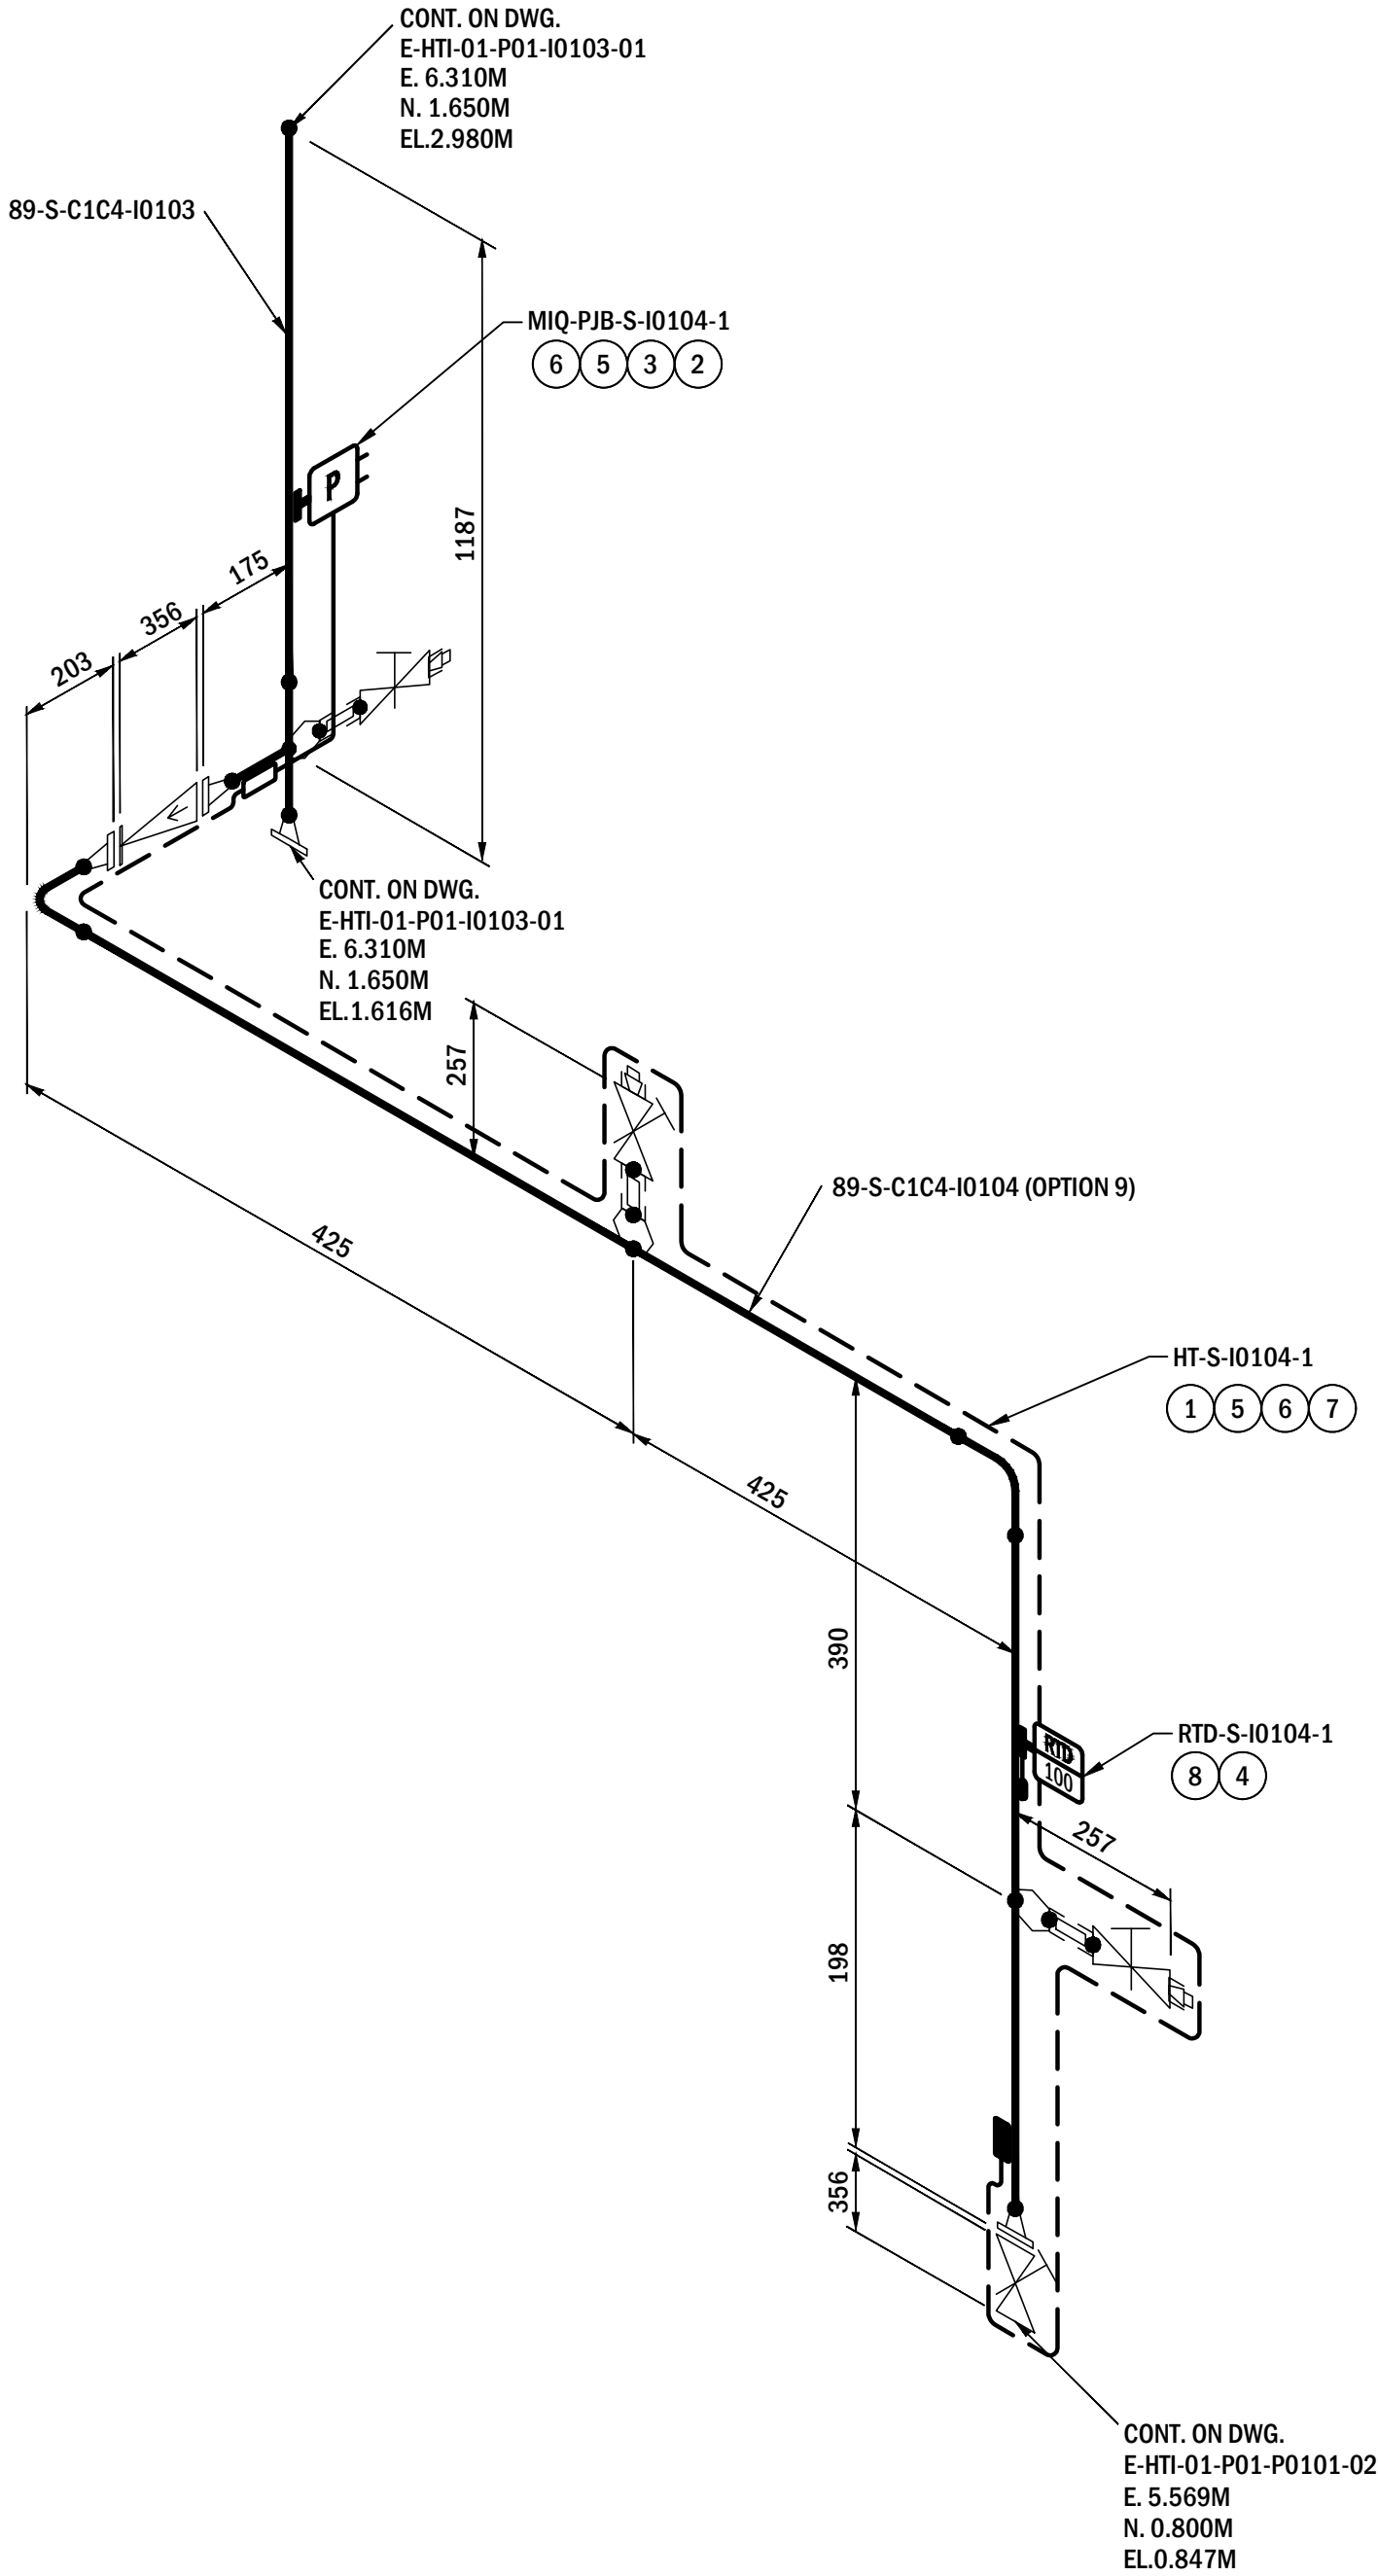


ELECTRIC HEAT TRACING DESIGN DATA CHART																						
DISTRIBUTION PANEL AND CIRCUIT NUMBER	HEAT TRACE NUMBER	INSULATION			MINIMUM AMBIENT TEMPERATURE (°C)	START-UP AMBIENT TEMPERATURE (°C)	MAXIMUM EXPOSURE TEMPERATURE (°C)	MAINTAIN TEMPERATURE (°C)	HEATING CABLE TYPE	CABLE LENGTH (m)	SUPPLY VOLTAGE (V ac)	HEAT TRACE RATIO	CURRENT		WATTAGE		HEATER OUTPUT (W/m)	PIPE MATERIAL	HEAT LOSS (W/m)	ELECTRICAL CLASSIFICATION		
		THICKNESS (mm)	CODE	SIZE (mm)									OPERATING (A)	COLD (A)	OPERATING (W)	COLD (W)				AREA	TEMPERATURE CODE or AUTOIGNITION TEMPERATURE	HIGH LIMIT SET POINT (°C)
HTPI01-CCT10/24	HT-S-I0104-1	75	MF	89	-40	-40	295	10	D/MIQ-40E1L-2S/8.5m/129/120/1.2m/10/3	8.5	120	1	1.1	1.2	129	141	13.8	CS	11.6	ZONE 2	T2D	N/A



OPTION 9

- SHOP NOTES:
- ALL ITEMS ON THIS MODULE (EXCLUDING MANUAL VALVES) INCLUDE THE TAG PREFIX XXXX.

- NOTES:
- HEAT TRACE AND EQUIPMENT SHALL BE INSTALLED IN COMPLIANCE WITH THE CEC.
 - FIELD ELECTRICAL CONTRACTOR TO INSTALL HEAT TRACE AS PER MANUFACTURER RECOMMENDATION. HEAT TRACE CABLE LENGTHS TO BE FIELD VERIFIED.
 - HEAT TRACE POWER, RTD, SPLICE, AND END KITS SHALL BE IDENTIFIED WITH LAMICOID.
 - PIPE HEAT LOSS VALUES INCLUDE SAFETY FACTOR OF 20% FOR ALL LINES.
 - REFERENCE TABLE ONLY INCLUDES THE MOST COMMON INSTALLATION SCENARIOS. REFER TO HEAT TRACE INSTALLATION DETAILS DWG. E-STD-00-600 SERIES FOR FURTHER DETAILS.
 - HEAT TRACING TO BE INSTALLED USING ITEMS LISTED IN THE BILL OF MATERIALS.
 - ALLOWANCES SHOWN ARE PER VALVE, SUPPORT, AND FLANGE.
 - HEAT TRACE CALCULATION IS BASED ON CONTROLLED DESIGN.
 - COORDINATES ARE BASED ON MODULE DATUM.
 - AN ALLOWANCE OF 0.8m WAS INCLUDED FOR TERMINATIONS, AND AN ADDITIONAL 10% ALLOWANCE WAS APPLIED TO THE CALCULATED HEAT TRACE LENGTH.

INSTALLATION DETAIL REFERENCE TABLE					(NOTE 5)				
DETAIL		ITEM		DETAIL	ITEM				
606		HT CABLE/RTD ORIENTATION		620	RTD				
607		ELBOW		621	PIPE RACK MODULES - FLANGED CONNECTIONS				
608		PIPE SHOE		622	M.I. HEAT TRACER				
609		FREEZE PROTECTED PIPE ENTERING BUILDING							
610		UNDERGROUND PIPE							
611		FLANGE							
612		DRAIN							
613		VALVE							
614		RELIEF VALVE							
615		STRAINER							
BILL OF MATERIALS									
(BASED ON THERMON PRODUCTS)									
ITEM	QUANTITY	CATALOG NUMBER	DESCRIPTION						
①	1	MIQ SERIES	MI SERIES CONSTANT WATTAGE HEATER, 300 VAC, 2 CONDUCTOR						
②	1	MIQ-PJB-RP-TB4	POWER CONNECTION JUNCTION BOX c/w 4 TERMINAL BLOCKS						
③	2	MIQ-JBS	POWER CONNECTION PIPE MOUNT STAINLESS STEEL BRACKET						
④	1	RTD-100-KIT	100 OHM PLATINUM RTD PIPE MOUNT						
⑤	AS REQ'D	T2SSB	BANDING, STAINLESS STEEL, 0.020" x 1/2" WIDE						
⑥	AS REQ'D	T34PB-CR	BANDING CRIMP SEAL						
⑦	AS REQ'D	CL	CAUTION LABEL (ENGLISH), 25 PER PACKAGE						
⑧	1	B-4	STAINLESS STEEL BANDING CLAMP, FOR LINES UP TO 4" (100 mm) DIAMETER						
⑨	-	B-10	STAINLESS STEEL BANDING CLAMP, FOR LINES UP TO 10" (250 mm) DIAMETER						
⑩	-	B-21	STAINLESS STEEL BANDING CLAMP, FOR LINES UP TO 21" (530 mm) DIAMETER						
⑪									
⑫									
VALVE ALLOWANCES				(NOTE 7)		OTHER ALLOWANCES		(NOTE 7)	
PIPE DIA.	TYPE	QTY.	ALLOW. EACH (m)	SIZE/TYPE	DESCRIPTION	QTY.	ALLOW. EACH (m)		
89	FLANGED	1	1.07						
89	CHECK	1	0.99						
33	SOCKET WELDED	2	0.30						

- ENGINEERING NOTES:
- THIS DRAWING REFERENCES THE ENGINEERING RECORD G02-1-PRDXXXX-E-HTI-01-P01-I0104-01 REV 0 FOR ALL TECHNICAL INFORMATION. IN THE EVENT OF DISCREPANCY BETWEEN THIS DRAWING AND THE ENGINEERED DRAWING OF RECORD, THE ENGINEERED DRAWING OF RECORD WILL TAKE PRECEDENCE UNLESS THE CHANGE IS PROPERLY CLOUED AS A REVISION TO THIS DRAWING AND STAMPED BY A PROFESSIONAL ENGINEER.

LEGEND		PIPE	HEAT TRACE CABLE	POWER CONNECTION KIT	SPLICE KIT	QUICK CONNECT	COLD LEAD CONNECTION	END SEAL	LIGHTED END SEAL	RTD SENSOR	PIPE SENSING THERMOSTAT	PIPE SUPPORT	REF. NO. 89-S-C1C4-I0104 (OPTION 9)	
DRAWING NO.		REFERENCE DRAWINGS		STAMPS APPLY TO CURRENT REVISION ONLY										
				SCOVAN INC. 2026.05.26 ISSUED FOR CONSTRUCTION										
				1 ISSUED FOR CONSTRUCTION WITH OPTION(S) 3, 9										
				2026.1111 2026.05.26 AUTO AUTO AUTO										
				JOB No. DATE BY CHK PE										
				PadX PARTNERSHIP Scovan										
				PADX NEXT GENERATION ENERGY SOLUTIONS PRODUCTION MODULE (MOD-01-P01) HEAT TRACE ISOMETRIC										
				CLIENT DRAWING NO. - DRAWING NO. G02-1-PRD0154-E-HTI-01-P01-I0104-01 REV. 1										