

The present work was submitted to the Department of Continuum Mechanics

Rheinisch-Westfälische Technische Hochschule Aachen
Faculty of Mechanical Engineering

Mini-Thesis

Development and investigation of general non-linear framework for solving rotation-free solid membranes

Presented by:	Harsh Pandey
Study programme:	M.Sc. CAME
Matriculation number:	415518
Reviewer:	Univ.-Prof. Dr.-Ing. Mikhail Itskov
Supervisor:	Michal Rajski M.Sc.

Declaration of Authorship

I declare that this work has been composed by myself, and describes my own work, unless otherwise acknowledged in the text.

All sentences or passages quoted in this paper from other people's work have been specifically acknowledged by clear cross-referencing to author, work and page(s). Any photos and illustrations which are not the work of the author have been used with the explicit permission of the originator and are specifically acknowledged.

This work has not been and will not be submitted for any other degree or the obtaining of ECTS points at the RWTH Aachen University or any other institution of higher education.

Aachen, 10th of October 2022

Harsh Pandey

Contents

1	Introduction to Shells	1
1.1	What are shells and membranes?	1
1.2	Problems with modelling shells/membranes	1
2	Finite Element Method	3
2.1	Introduction: Poisson Problem	3
2.1.1	Function Spaces and Well-Posedness of the Weak Formulation	4
2.2	Construction of a Finite Element Space	4
2.3	Isoparametric Elements	7
2.4	Numerical Quadrature	8
2.5	Solutions, Errors, Refinements, Convergence	8
3	Nonlinear FEM Framework in Orthogonal Basis	11
3.1	Continuum Mechanics and Kinematical Relations	11
3.2	Stress and Balance Equations	13
3.2.1	Balance of Mass	13
3.2.2	Balance of Linear Momentum	13
3.2.3	Balance of Angular Momentum	14
3.2.4	Balance of Kinetic Energy	14
3.2.5	Conservation of Energy	14
3.3	Constitutive Relations	14
3.4	Weak Form	15
3.5	Discretisation	16
3.6	Newton Raphson Method and Linearisation	17
3.7	Numerical Examples	18
4	Nonlinear FEM Framework in Curvilinear Basis	21
4.1	Curvilinear Coordinates	21
4.2	Kinematics	22
4.3	Momentum Balance	23
4.4	Weak Form	24
4.5	Material Constitution	24
4.6	Volume Constraint	25
4.7	Discretization	25
4.8	Linearization	27
4.9	Numerical Examples: Inflation of Square Sheet	28
5	Conclusion	31
A	Nonlinear Framework	33
A.1	Material Model Expressed in $\mathbf{S}$	33
A.2	Derivation of Compliance Matrix in Reference Configuration	33
A.3	Derivation of Compliance Matrix in Current Configuration	34

B	Shell Formulations	37
B.1	Curvilinear Coordinates	37
B.1.1	Proof: $\mathbf{a}_{\alpha;\beta} = (\mathbf{n} \otimes \mathbf{n})\mathbf{a}_{\alpha,\beta}$	37
B.1.2	Computation of Components of $b_{\alpha\beta}$	37
B.2	Weak Form Derivation	37
B.3	Computation of $w_{\alpha;\beta}$	38
B.4	Discretisation of $w_{\alpha;\beta}$	38
B.5	Linearisation	39
B.5.1	Linearisation of $\mathbf{a}_\alpha$	39
B.5.2	Linearisation of $a_{\alpha\beta}$	39
B.5.3	Linearisation of J	39
B.5.4	Linearisation of $a^{\alpha\beta}$	40
B.5.5	Linearisation of $\tau^{\alpha\beta}$: Derivation of Compliance Matrix	41
B.5.6	Linearisation of $\mathbf{f}_{\text{int}}^e$	43
B.5.7	Linearisation of $\mathbf{f}_{\text{ext}}^e$	43
	Bibliography	45

List of Figures

2.1	Approximate Solution to the Poisson Problem	9
2.2	Convergence of the Approximate Solution	10
3.1	Configuration and Motion of a Continuum Body in Orthogonal Basis	12
3.2	Numerical Analysis of Cantilever Beam	19
4.1	Configuration and Motion of a Continuum Surface in Curvilinear Coordinates	21
4.2	Inflation of Square Sheet under Gravitational Loading	28
4.3	Inflation of Square Sheet with Volume Constraint	29
4.4	Pressure-Volume Relation for Inflation of Square Sheet for Various Orders of Elements	29
4.5	Large Deformation of Square Sheet using Various Orders of Elements	30

1 Introduction to Shells

1.1 What are shells and membranes?

Most structural objects and elements can be reduced to a physical line with a certain cross-section. The description of stresses in these objects can be done by describing “stress resultants” - the normal force, transverse shearing forces, bending moments, and the torque - in the cross section. In contrast to these objects, certain structural elements enclose some space making it impossible for them to be reduced to a line. They are better described as a curved surface or a plane. These elements can be broadly broken down in two categories - plates and shells [6].

A shell is a curved, thin-walled structure with the thickness being significantly smaller than the other dimensions [2]. The distinguishing feature between a shell and a plate is that the shell has a curvature whereas plates are flat structures [4]. It is, however, not necessary for the thickness in a shell to be extremely small. It can also vary across the surface. The behaviour of a shell can be geometrically linear or nonlinear. Membranes are special cases of shells whose walls offer no resistance to bending moments and transverse shear forces.

Shells carry load efficiently - this is most optimally done when all the load is carried using membrane forces; exhibit high structural integrity, strength to weight ratio; and have high stiffness [22]. Shells and membranes are ubiquitous in engineering and nature because of the advantages they present - from aerospace as aeroplanes and rocket hulls, civil engineering where they are found in large span roofs, cooling towers, containment tanks, to biological systems such as skulls, eyes, cells, and blood vessels.

1.2 Problems with modelling shells/membranes

In the real world, thin shells are very sensitive to imperfections and can be highly unstable if not designed properly [10]. Modelling this complexity is challenging too. Shells can undergo large deformations, large rotations, and large strains. They can behave highly nonlinearly and can have multiple instabilities - in compression, for out-of-plane loading, for pressure loading, and with respect to in-plane loading [16]. This mixture of performance and sensitivity makes the shell the ‘primadonna of structures’ [2]. Given that there are no analytical solutions for most cases to predict a shell’s behaviour, reliable approximate solutions are necessary.

Shell theories aim to reduce the dimensionality of the equilibrium problem from a 3D body to only the study of the midsurface of the shell. This dimensionality reduction is often dependent on the thickness of shells. Generally, shells with a thickness h and general radius of curvature R , can be categorised as thin shells if $\max(h/R) \leq (1/20)$. Love laid the foundations of classical linear shell theory by applying the Kirchhoff hypothesis to thin, homogenous, isotropic, linear-elastic shells governed by a generalised Hooke’s law. Known as the Kirchhoff-Love theory, the assumptions can be summarised as [14]:

- No deformation in the midsurface - it is the neutral plane during bending.
- Points that lie on the normal to the midsurface remain so even after deformation.

The transverse normal stresses and the transverse shear strains are neglected. Reissner [15] and Mindlin [11] separately expanded upon the Kirchhoff-Love hypothesis with the inclusion of transverse shear strains and first order shear effects in their derivations, which could calculate the deformation of shells with a thickness of $\max(h/R) \leq (1/10)$. Their theories assumed the following:

- The normals of the undeformed midsurface are deformed into the normals to the deformed midsurface.
- The stress components normal to the middle surface are small compared to the other stress components and can be neglected in the stress-strain relations
- The displacements are so small that the equilibrium conditions for deformed elements are the same as if they were not deformed.

There is a lack of a universally accepted classical linear shell theory, all of which share a degree of inaccuracy due to their arbitrary treatment of secondary effects [13] and *ad hoc* assumptions [12] during different stages of the formulation of the governing equations. Love's first approximation

- doesn't satisfy the equilibrium equation arising from the symmetry of the stress tensor,
- isn't invariant under infinitesimal rigid body displacement and,
- violates a 2D analogue of the Betti-Rayleigh reciprocity theorem in 3D linear elasticity.

Reissner's first approximation runs into the same problems except violating the reciprocity theorem [21]. Although improvements to classical linear shell theories can be found in later works by Reissner (1959), Novozhilov (1959), Sanders (1959), and Koiter (1959), Naghdi [12] mentions the existence of inconsistencies present in many of these approximations.

The formulation presented in this report is based on the work of Sauer [16], which is a formulation of the theoretical framework laid down by Steigmann [18]. Although substantially same as Naghdi's [21] formulation, Steigmann's assumptions logically conform to finite elasticity theory. Sauer's formulation is also specifically based on membranes because while membranes are special cases of shells and a formulation for shells could be extended to membranes, a formulation dedicated explicitly towards membranes is more robust and accurate [16]. Here, liquid membranes can also be accounted for through the split of contributions between the in-plane and out-of-plane components, admission of arbitrary elastic material models, all quantities are formulated directly in curvilinear coordinates.

The following chapter presents the theory and formulation of the finite element method for the solution of an elliptic boundary value problem. Chapter 3 details the theory and implementation of the finite element method to nonlinear boundary value problems for solid mechanics in an orthonormal basis system. Chapter 4 extends this nonlinear framework to membranes through the incorporation of curvilinear coordinates and presents numerical examples to illustrate the capabilities of the formulation.

2 Finite Element Method

2.1 Introduction: Poisson Problem

The Poisson equation is the simplest and the most famous elliptic partial differential equation [1]. Considering a Poisson problem posed in a domain $\mathcal{D}$, a bounded subset of $\mathbb{R}$, with prescribed boundary conditions, the problem can be defined in its entirety as:

$$\begin{cases} \nabla^2 u = s & \text{in } \mathcal{D} \\ u = \bar{u} & \text{on } \mathcal{S}_u \\ q = \frac{\partial u}{\partial \mathbf{x}} \cdot \mathbf{n} = \bar{q} & \text{on } \mathcal{S}_q, \end{cases} \quad (2.1)$$

where u defines the unknown potential, $\bar{u}$ is the prescribed value of potential on $\mathcal{S}_u$ portion of the boundary and $\bar{q}$ is the prescribed flux on $\mathcal{S}_q$ with $\mathcal{S} = \mathcal{S}_u \cup \mathcal{S}_q$ being the boundary of the domain $\mathcal{D}$. The source term is denoted as s . Equation (2.1) is referred to as a boundary value problem. If $\mathcal{S}_q = \emptyset$, the problem is referred to as a Dirichlet problem. Similarly, if $\mathcal{S}_u = \emptyset$, the problem is called a Neumann problem. A third possibility exists for when there's both a prescribed flux and a prescribed value of the potential on disjointed subsets of the boundary such that $\mathcal{S} = \mathcal{S}_q \cup \mathcal{S}_u$.

A sufficiently smooth function u satisfying (2.1) is known as a *classical solution* to the boundary value problem [1]. This puts a strong condition on u to be atleast twice differentiable in the domain $\mathcal{D}$. However, due to discontinuous source functions or a discontinuous domain, the existence of a classical solution might not be possible. This is not uncommon and necessitates an alternative description of the boundary value problem - called the *weak formulation* as it reduces the constraints imposed upon the solution. To achieve this two functional spaces must be defined. The space of test functions,

$$\mathcal{V} = \{w \in H_0^1(\mathcal{D}) \mid w = 0 \text{ on } \mathcal{S}_u\} \quad (2.2)$$

and the space of collection of functions known as trial solutions

$$\mathcal{W} = \{u \in H^1(\mathcal{D}) \mid u = \bar{u} \text{ on } \mathcal{S}_u.\} \quad (2.3)$$

Based on the weighted residual method, using these test functions and using the product rule on the right hand side, we get

$$\begin{aligned} (s, w) &:= \int_{\mathcal{D}} w s \, dv = \int_{\mathcal{D}} w \nabla^2 u \, dv \\ &= \int_{\mathcal{D}} [\nabla(w \nabla u) - \nabla w \nabla u] \, dv. \end{aligned}$$

Applying the divergence theorem,

$$\int_{\mathcal{D}} \nabla(w \nabla u) \, dv = \int_{\mathcal{S}} w(\nabla u \cdot \mathbf{n}) \, da \quad (2.4)$$

and substituting the result in the previous equation,

$$-\int_{\mathcal{D}} \nabla w \cdot \nabla u \, dv + \int_{\mathcal{S}} w (\nabla u \cdot \mathbf{n} \, da) = \int_{\mathcal{D}} w s \, dv. \quad (2.5)$$

As $w = 0$ on $\mathcal{S}_u$ and according to the problem statement and the definition of Neumann boundary conditions, equation (2.5) can be written as

$$-\int_{\mathcal{D}} \nabla w \cdot \nabla u \, dv = \int_{\mathcal{D}} w s \, dv - \int_{\mathcal{S}_q} w \bar{q} \, da. \quad (2.6)$$

2.1.1 Function Spaces and Well-Posedness of the Weak Formulation

For the equality in (2.6) to make sense, it is no longer necessary for u to be twice differentiable. The classical definition of a derivative is stated pointwise - thus requiring the function to be defined at all points. For (2.1), this implies that u be C^2 continuous. The weak derivative involved in the weak formulation is more general and includes functions that are not necessarily C^2 continuous throughout the domain. This requires the definition of a function space where it is possible to define a weak derivative. This function space is where the *test functions* and *trial solutions* live. This function space is called a *Sobolev space*. Using the space of square integrable functions,

$$L^2(\Omega) = \left\{ f : \Omega \rightarrow \mathbb{R} : \int_{\Omega} |f|^2 < \infty \right\}, \quad (2.7)$$

the Sobolev spaces for a given $f \in L^2(\Omega)$ can be defined as

$$H^1(\Omega) = \left\{ f \in L^2(\Omega) : \frac{\partial f}{\partial x_1}, \frac{\partial f}{\partial x_2} \in L^2(\Omega) \right\}. \quad (2.8)$$

and,

$$H_0^1(\Omega) = \left\{ f \in H^1(\Omega) : f = 0 \text{ on } \partial\Omega \right\} \quad (2.9)$$

is the special Sobolev space, which is the set of all functions f in $H^1(\Omega)$ such that $u = 0$ on the boundary of the domain [19]. Thus for partial differential equations with a Dirichlet boundary condition, it is natural to look for a test function belonging to H_0^1 , and the trial solutions to be a part of H^1 . If the all the first derivatives on the left hand side of (2.6) are in $L_2(\mathcal{D})$, $\bar{q} \in L_2(\mathcal{S}_q)$, and $s \in L_2(\mathcal{D})$, the equation (2.6) is well posed in the sense of Hadamard [19]. Furthermore, there exists a weak solution $u \in H^1(\mathcal{D})$ that is also a solution to (2.1) [3]. According to the Lax-Milgram theorem, the weak solution obtained from the solution of (2.6) is unique [9]. For a thorough mathematical treatment, the reader is referred to [3].

2.2 Construction of a Finite Element Space

Approximation methods can be broadly divided in two categories.

- The given function is approximated using linearly independent functions and parameters. This is a *non-nodal approximation* and is written as

$$u(x) = P_1(x)a_1 + \cdots + P_n(x)a_n,$$

where $P_1, P_2, \dots, P_n$ are linearly independent known functions, and $a_1, a_2, \dots, a_n$ are the parameters of the approximation. These parameters generally do not have any physical meaning.

- In *nodal approximations* the parameters a_i , as described above, can be chosen to be the values of the function u at n different coordinates x_i . Thus,

$$\begin{aligned} u(x_1) &= u_1 = a_1 \\ u(x_2) &= u_2 = a_2 \\ u(x_3) &= u_3 = a_3 \\ &\dots \\ u(x_n) &= u_n = a_n \end{aligned}$$

turning the approximation to be,

$$u(x) = N_1(x)a_1 + N_2(x)a_2 + \dots + N_n(x)a_n$$

where $N_1, N_2, \dots, N_n$ are called *shape functions* that have the property

$$N_i(x_j) = \begin{cases} 0, & \text{if } i \neq j \\ 1, & \text{if } i = j \end{cases}$$

Nodal approximation methods are preferred over non-nodal approximations as non-nodal approximations require linearly independent functions that are well defined throughout the domain. For a domain with a complex boundary, it makes the fulfilment of boundary conditions difficult and require increased computational power due to the dense system of equations required to solve the problem. Nodal approximation methods involve piecewise defined shape functions. While it may be difficult to satisfy the completeness and continuity criterias involved, due to the final system of equations being sparse and the local support of shape functions, the advantage of drastically reduced computation offsets the negatives. The Finite Element Method provides a formalism for generating discrete algorithms for approximating the solutions of differential equations using nodal approximations. Formally, according to [5],

Definition 2.2.1. *a Finite Element is a set of triples, $(K, \mathcal{P}, \mathcal{N})$, where*

- $K \subseteq \mathbb{R}^n$ be a bounded closed set with nonempty interior and piecewise smooth boundary (the element domain),
- $\mathcal{P}$ be a finite-dimensional space of functions on K (the space of shape functions) and
- $\mathcal{N} = N_1, N_2, \dots, N_n$ be a basis for the dual space of $\mathcal{P}$ (the set of nodal variables).

The closed set K defines the element subdomain being used in the calculation. $\mathcal{P}$ delineates the set of the shape functions involved in the approximation, and $\mathcal{N}$ is the set of nodal variables i.e. the nodes at which the function is approximated. For a linear quadrilateral element K , $\mathcal{P}$ can be characterised by saying that the overall approximation is continuous and for a linear approximation on the vertices i, j, k, l , there are only four basis functions, $\{\Phi_i, \Phi_2, \Phi_3, \Phi_4\}$ that are not identically zero. This is the Kronecker delta property and can be written as

$$\mathcal{N}_i(\Phi_j) = \delta_{ij}. \quad (2.10)$$

It is assumed that these conditions ensure the interpolation problem using functions in $\mathcal{P}$ is uniquely solvable. For proof, refer to [3]. The approximation of the variable field that

would be the solution to the PDE is the basis of $\mathcal{P}$. The construction of a finite element, thus, involves:

- choosing an element domain
- choosing a polynomial space of a given degree
- choosing the degrees of freedom (number of nodes)
- computing the nodal basis of $\mathcal{P}$ with respect to $\mathcal{N}$.

With the derived weak form (2.6), it is possible to use the finite element method to solve the given problem. Let the domain $\mathcal{D}$ be discretised into finite elements $\mathcal{D}^e$ such that

$$\mathcal{D} = \bigcup_{e=1}^{n_{el}} \mathcal{D}^e, \quad (2.11)$$

where $\mathcal{D}^e \cap \mathcal{D}^f = \emptyset$ for $e \neq f$ which implies that these have no overlap. Furthermore, these finite elements can only share nodes along common facets in order to preserve the compatibility of the primary variables and the equilibrium within the elements and along the shared facets.

With the discretisation defined, the functional spaces for the shape functions and the trial solutions can be defined, similar to Section 2.1 as

$$\mathcal{V}^h = \left\{ w \in H^1(\mathcal{D}) \mid w|_{\mathcal{S}^e} \in \mathcal{P}_m(\mathcal{D}^e) \forall e \text{ and } w = 0 \text{ on } \mathcal{S}_u \right\}, \quad (2.12)$$

$$\mathcal{W}^h = \left\{ u \in H^1(\mathcal{D}) \mid u|_{\mathcal{S}^e} \in \mathcal{P}_m(\mathcal{D}^e) \forall e \text{ and } u = \bar{u} \text{ on } \mathcal{S}_u \right\} \quad (2.13)$$

The position vectors can be approximated as

$$\mathbf{x} \approx \mathbf{x}^h = \mathbf{N}^e \mathbf{x}^e, \quad \mathbf{x}^h \in \mathcal{D}^e \subset \mathcal{S}^h, \quad (2.14)$$

where

$$\mathbf{N}^e = [N_1 \mathbf{1}, N_2 \mathbf{1}, \dots, N_{n_n^e} \mathbf{1}], \quad (2.15)$$

where $\mathbf{N}^e$ denotes the $(d \times d * n_n^e)$ array, n_n^e denotes the number of element nodes, d number of degrees of freedom for a given node, N_i the nodal shape functions, and $\mathbf{1}$ is the identity matrix. For a potential function, the discretisation can be given as

$$u(\mathbf{x}) \approx u^h(\mathbf{x}) = \sum_{k=1}^{n_{en}} N_k^e u_k^e = \mathbf{N}^e \mathbf{u}^e. \quad (2.16)$$

In the current case, u is a scalar field such that the degree of freedom $d = 1$. Using Galerkin formulation, the arbitrary test functions can be defined as

$$w^h \in \mathcal{V}^h := \text{span} \{ \mathbf{N}^e \}. \quad (2.17)$$

Using the above definitions, it is possible to write the discretised system of equations as

$$\underbrace{- \sum_{e=1}^{n_{el}} \int_{\mathcal{D}^e} \nabla N_a \cdot \nabla N_b dv}_{\mathbf{K}} \underbrace{u_b^e}_{\mathbf{u}} = \underbrace{\sum_{e=1}^{n_{el}} \int_{\mathcal{D}^e} N_b s dv - \sum_{e=1}^{n_{el}^b} \int_{\mathcal{S}_q^e} N_b \bar{q} da}_{\mathbf{f}} \quad (2.18)$$

where n_{el}^b denotes the number of elements laying on the boundary where the Neumann boundary conditions are prescribed. The system of thus discretised linear equations required to solve the model problem (2.1) can be written in a compact form as

$$\mathbf{K}\mathbf{u} = \mathbf{f}, \quad (2.19)$$

where the elemental contributions are defined as,

$$\mathbf{K}_{ab}^e = - \int_{\mathcal{D}^e} \nabla N_a \cdot \nabla N_b \, dv, \quad (2.20)$$

$$\mathbf{f}_b^e = \int_{\mathcal{D}^e} N_b s \, dv - \int_{S_q^e} N_b \bar{q} \, da. \quad (2.21)$$

2.3 Isoparametric Elements

The Finite Element Method consists of discretisation at two levels - the domain of the problem is discretised into finite elements, and the field of primary variables is approximated using interpolation functions. When dealing with complex domains, in order to decrease the geometrical discretisation error, it becomes necessary to use 'irregular' elements - elements that necessarily would not have straight line edges or faces. However, it may often not be possible to define interpolations that result in *conforming approximations* over these irregular elements. To ensure conforming approximations basis functions can be defined over a reference element. For a reference quadrilateral, $\xi \in [-1, 1]$ and $\eta \in [-1, 1]$, the basis functions can be constructed using Lagrangian polynomials of order n . For a node characterised by its row i and column j , the corresponding shape function can be given by,

$$N_{ij} = l_i^n(\xi) l_j^n(\eta), \text{ where } l_k^n(\xi_i) = \prod_{k=1, k \neq i}^n \frac{\xi_k - \xi}{\xi_k - \xi_i} = \begin{cases} 1, i = k \\ 0, i \neq k \end{cases} \quad (2.22)$$

These functions are then mapped from the reference element to any general quadrilateral with vertex coordinates, (x_q, y_q) by a transformation. For a linear quadrilateral element

$$\tau^e : \begin{cases} \xi \rightarrow x^e = \sum_{q=1}^4 x_q N_q(\xi, \eta) \\ \eta \rightarrow y^e = \sum_{q=1}^4 y_q N_q(\xi, \eta). \end{cases} \quad (2.23)$$

When, to ease computation, the geometry and the primary field variables are approximated using the same shape functions, the approximation is called *isoparametric*. Furthermore, since the reference element is defined in a local orthogonal coordinate system, covariant and contravariant derivatives do not need to be calculated - thus making the use of isoparametric elements in nonlinear problems particularly useful. Considering a 1D case, it is possible to write

$$\int_{x_i}^{x_{i+1}} f(x) \, dx = \int_{-1}^1 f(x(\xi)) |J| \, d\xi = \int_{-1}^1 f(x(\xi)) \frac{dx}{d\xi} \, d\xi \quad (2.24)$$

where $|J|$ defines the determinant of the Jacobian. In the 1D case, it is simply the parametric derivative. For a two dimensional case, the Jacobian can be defined as

$$J = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} \end{bmatrix} \quad (2.25)$$

In order to evaluate the gradients of the shape functions in (2.20), it is necessary to calculate the $\frac{\partial N}{\partial x}$ and $\frac{\partial N}{\partial y}$ which can be achieved by evaluating the following system of equations

$$J \begin{bmatrix} \frac{\partial N}{\partial x} \\ \frac{\partial N}{\partial y} \end{bmatrix} = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} \end{bmatrix} \begin{bmatrix} \frac{\partial N}{\partial \xi} \\ \frac{\partial N}{\partial \eta} \end{bmatrix} = \begin{bmatrix} \frac{\partial N}{\partial \xi} \\ \frac{\partial N}{\partial \eta} \end{bmatrix} \quad (2.26)$$

and thus

$$\begin{bmatrix} \frac{\partial N}{\partial x} \\ \frac{\partial N}{\partial y} \end{bmatrix} = J^{-1} \begin{bmatrix} \frac{\partial N}{\partial \xi} \\ \frac{\partial N}{\partial \eta} \end{bmatrix}. \quad (2.27)$$

2.4 Numerical Quadrature

In order to increase computational efficiency, continuous definite integrals can be evaluated using approximations. An integral of the form

$$I = \int_{-1}^1 F(x) dx,$$

can be approximated using the weighted sum of the function evaluated at certain points,

$$\int_{-1}^1 F(x) dx \approx \sum_{r=1}^{n_{gp}} F(x_r) W_r.$$

Chosen for its efficiency and accuracy, Gaussian quadrature optimises the placement of these points such that the n_{gp} sampling points can integrate exactly a polynomial function of degree $(2n_{gp} - 1)$. Moreover, through the utilisation of the isoparametric concept, the bounds of integration do not need to be changed as the bounds of integration for the reference element are $[-1, 1]$.

Using Gaussian quadrature, the contributions to the system matrices $\mathbf{K}$ and $\mathbf{f}$ can be written as

$$\begin{aligned} \mathbf{K}_{ab}^e &= - \int_{\mathcal{D}^e} \nabla N_a \cdot \nabla N_b dv \\ &= - \sum_{gp=1}^{n_{gp}} \left[\frac{\partial N_a(\xi_{gp})}{\partial x} \frac{\partial N_b(\xi_{gp})}{\partial x} + \frac{\partial N_a(\xi_{gp})}{\partial y} \frac{\partial N_b(\xi_{gp})}{\partial y} \right] \det \mathbf{J}(\xi_{gp}) W_{gp}, \end{aligned} \quad (2.28)$$

$$\mathbf{f} = \int_{\mathcal{D}^e} N_b s dv = \sum_{gp=1}^{n_{gp}} N_b(\xi_{gp}) s(\xi_{gp}) \det \mathbf{J}(\xi_{gp}) W_{gp}. \quad (2.29)$$

2.5 Solutions, Errors, Refinements, Convergence

The developed framework is illustrated by considering the following boundary value problem,

$$\begin{cases} \nabla^2 u &= 2 \exp^{x-y} \quad \text{in } (x, y) \in \mathcal{D}, \\ u &= e^{x-y} + e^x \cos y \quad \text{on } (x, y) \in \mathcal{S}, \end{cases} \quad (2.30)$$

such that

$$\mathcal{D} \cup \mathcal{S} = \{(x, y) | 0 \leq x \leq 1, 0 \leq y \leq 1\}. \quad (2.31)$$

The exact solution can be given as

$$u = e^{x-y} + e^x \cos y. \quad (2.32)$$

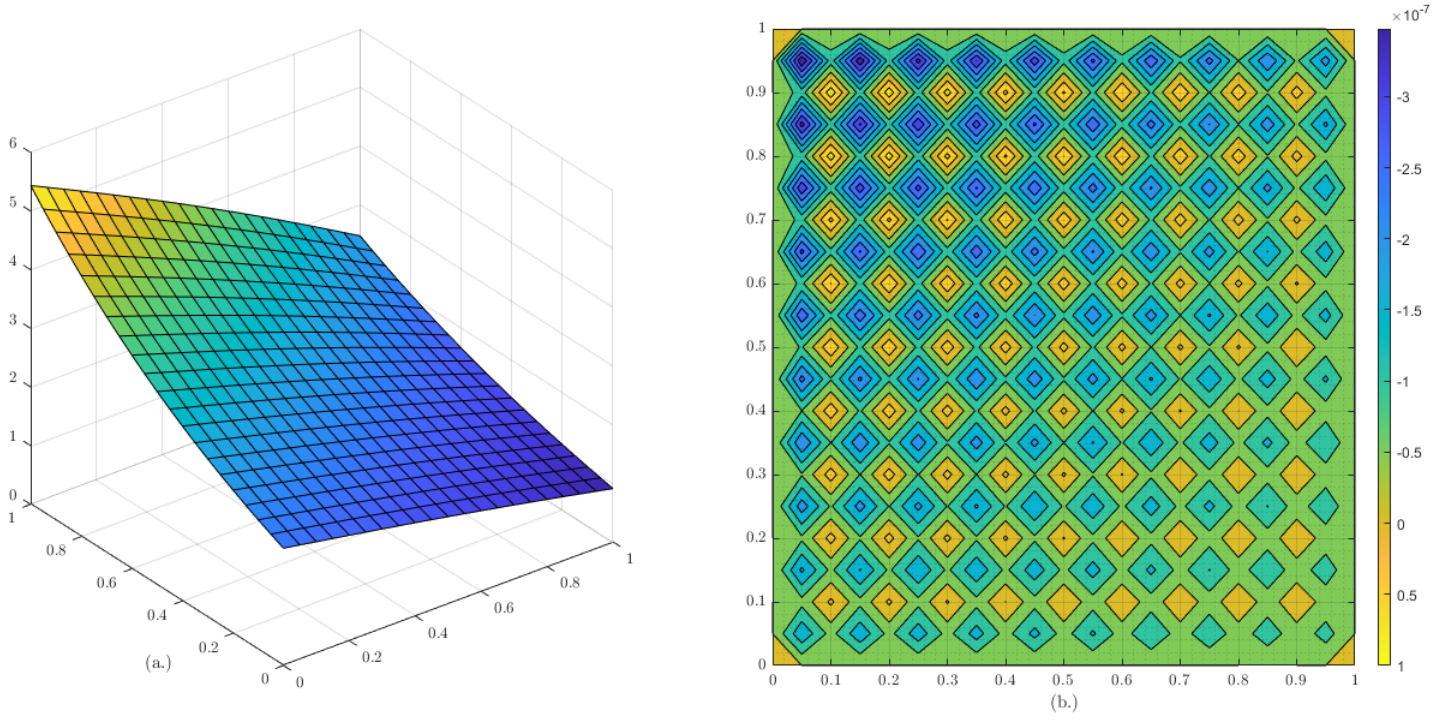


FIGURE 2.1: (a.) Approximate solution to the given BVP and (b.) the relative error in the analytical and the approximate solution.

The domain is meshed using standard quadrilateral Lagrangian elements. The mesh can be refined by varying the size of the elements or varying the order of the approximating polynomial from 1 upto 5. The FEM implementation uses numerical integration as described in Sectin 2.4. The approximated solution and refinements are evaluated using the $L^2 - error$. Figure 2.1 depicts the approximate solution of the given boundary value problem and the relative error between the exact and the approximate solution respectively.

The convergence of the approximate solution to the exact solution is investigated by plotting the $L^2 error$ against increasing number of elements in the mesh for various Gauss quadrature points ¹.

In this section we developed the Finite Element framework for the solution of boundary value problems, investigated the validity of the resulting approximated solutions using *a posteriori* error estimates, and tested if the approximated solution converges to the exact solution. This was done in order to lay the foundation for the development of a more complex framework in the next section in order to study the nonlinear behaviour of large deformations.

¹The data for the solution with a singular element encompassing the domain has been skipped as it leads to a trivial solution for the case of a first order quadrilateral element.

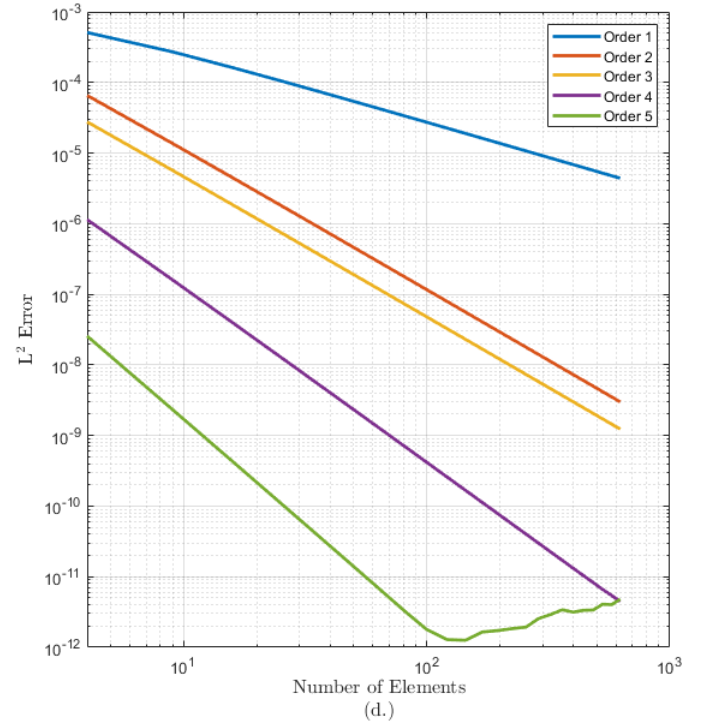
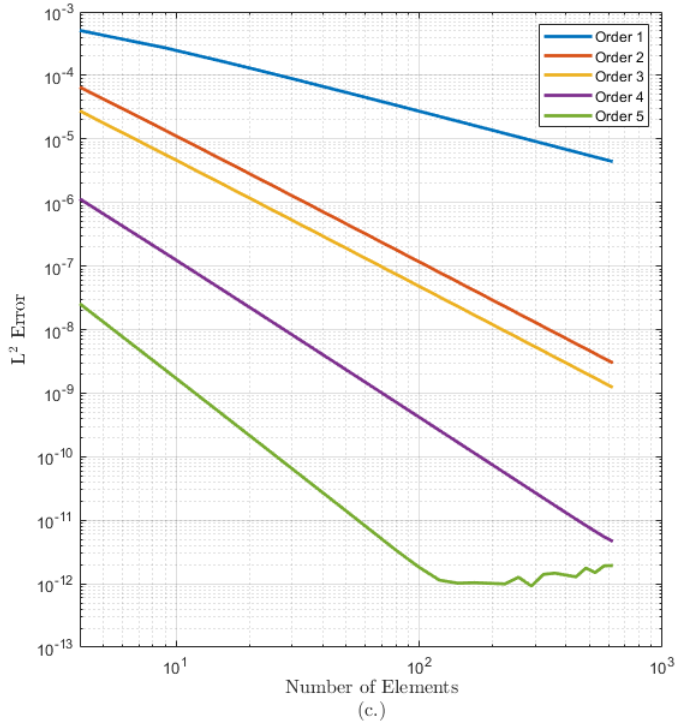
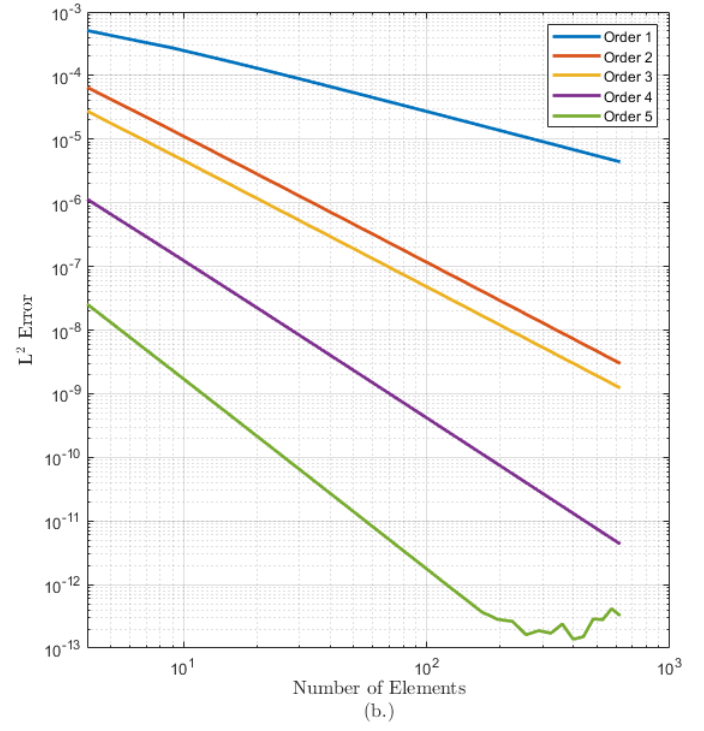
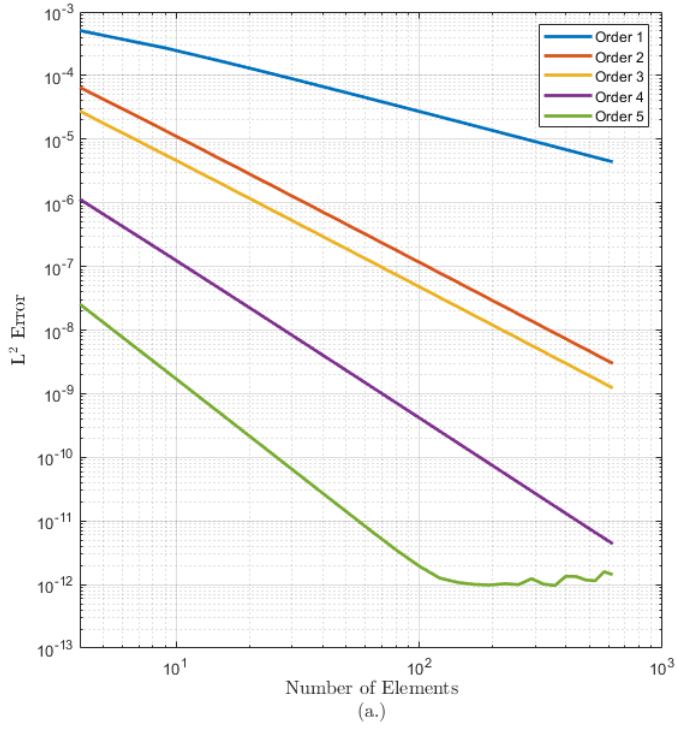


FIGURE 2.2: Convergence of the approximate solution using various orders of approximating polynomial and (a.) 6, (b.) 8, (c.) 10, and (d.) 12 Gauss-Quadrature points.

3 Nonlinear FEM Framework in Orthogonal Basis

3.1 Continuum Mechanics and Kinematical Relations

According to continuum mechanics, a body $\mathcal{B}$ is defined as a manifold consisting of finite number of particles. This body $\mathcal{B}$ is also assumed to be a σ – finite measure space - this implies that each subset of $\mathcal{B}$ is associated with a non-negative measure, which in this case would be the mass distribution. This manifold is assumed to be smooth, sufficiently differentiable, and the configuration of the particles at a given time can be mapped one-to-one onto Euclidean space, $\varphi : \mathcal{B} \rightarrow \mathbb{E}^3$, thus assigning a position vector to each particle of the body in $\mathbb{E}^3$ [20, 23]. For simplicity, an orthogonal cartesian basis is assumed in this section as the formulation will be based on isoparametric interpolations - which rely on an orthogonal basis. A more general description using curvilinear coordinates is covered in Section 4.1. In order to ease the description of motion and deformation, it is convenient to assume a *reference configuration* at an fixed time $t = t_0$. In this configuration, the body is assumed to be unloaded, undeformed, and unstressed. For an arbitrary point on the body P a position vector can be defined with respect to the origin of the basis,

$$\begin{cases} \mathbf{X} &= \boldsymbol{\varphi}(\mathbf{X}, t_0), \\ \mathbf{X} &= X^i \mathbf{E}_i, \text{ where } X^i : X^1, X^2, X^3 \end{cases} \quad (3.1)$$

and $\mathbf{E}_i$ are unit vectors along the X^i axes.

At any other time t the configuration of the body will be referred to as the *current configuration*. This mapping of the reference configuration into the current configuration is assumed to be so that all points in both configurations are mapped one-to-one. The position vector of the point P that has now moved due to external forces to a position $\mathbf{p}$ can be defined as

$$\begin{cases} \mathbf{x} &= \boldsymbol{\varphi}_t(\mathbf{X}, t), \\ \mathbf{x} &= x^i \mathbf{e}_i, \text{ where } x^i : x^1, x^2, x^3. \end{cases} \quad (3.2)$$

Similarly, $\mathbf{e}_i$ are the unit vectors along the x^i axes.

Two consequences follow the assumption of a cartesian basis system. The dual basis to the unit vectors $\mathbf{E}_i$ and $\mathbf{e}_i$ reduces to the original basis, thus making the position of the indices immaterial. Furthermore, as $\mathbf{E}$ and $\mathbf{e}$ are self adjoint, it can be shown that $\mathbf{E}_i = \mathbf{E}^i = \mathbf{e}_i = \mathbf{e}^i$, thus making the unit vectors and the position of the indices in both the configurations interchangeable without any effects to the maths involved. The position vector of the point $\mathbf{p}$ relative to P is called the displacement vector $\mathbf{u}$ and can be defined as

$$\mathbf{u} = \mathbf{x} - \mathbf{X} = U^i \mathbf{E}_i = u^i \mathbf{e}_i. \quad (3.3)$$

In the reference configuration an infinitesimal vectorial line element between two points can be written as $d\mathbf{X}$. Similarly, $d\mathbf{x}$ can be defined as the infinitesimal vectorial line element between the corresponding points in the current configuration. The mapping from $d\mathbf{X}$ to

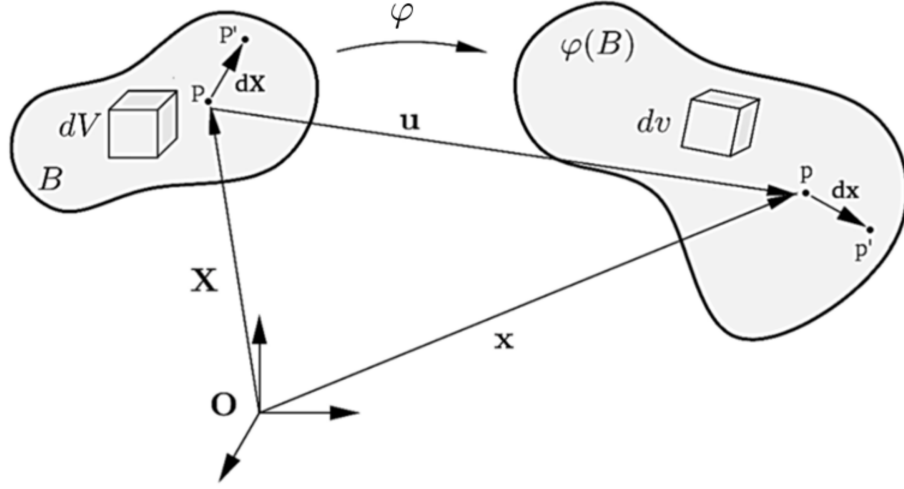


FIGURE 3.1: Configuration and motion of a continuum body in orthogonal basis (Image Source: Institute of Applied Mechanics, RWTH Aachen).

dx can be used to study the deformation of the body. This mapping can be represented with the help of a second order tensor called the *deformation gradient*.

$$dx = F dX \quad (3.4)$$

$$F := \text{Grad } x = \frac{\partial x}{\partial X^i} \otimes e^i = \frac{\partial x^i}{\partial X^j} e_i \otimes e^j = F_{,j}^i e_i \otimes e^j \quad (3.5)$$

The deformation gradient further allows the transformation of differential quantities from the reference to the current configuration. A differential area element da in the current configuration can be written in terms of the area element dA in the reference configuration using Nanson's formula,

$$da = n da = J F^{-T} N dA = J F^{-T} dA, \quad (3.6)$$

where n and N are the normal vectors of the area elements da and dA respectively, and J is the determinant of the deformation gradient

$$J = \det F. \quad (3.7)$$

This also enables us to construct a relation between the differential volume elements,

$$dv = J dV. \quad (3.8)$$

The squares of the line elements dx and dX are related with the use of the right and left *Cauchy-Green tensors* represented as C and b respectively, that are defined as,

$$dx \cdot dx = dX \cdot C dX, \text{ where } C := F^T F, \quad (3.9)$$

$$dX \cdot dX = dx \cdot b^{-1} dx, \text{ where } b := F F^T, \quad (3.10)$$

which enables us to define the strain measures based on the difference between the squared

lengths $\|\mathrm{d}\mathbf{x} \cdot \mathrm{d}\mathbf{x}\|^2 - \|\mathrm{d}\mathbf{X} \cdot \mathrm{d}\mathbf{X}\|^2$, known as the *Green-Lagrange strain tensor* and the *Al-mansi strain tensor* respectively

$$\mathbf{E} := \frac{1}{2} (\mathbf{C} - \mathbf{I}), \quad (3.11)$$

$$\mathbf{e} := \frac{1}{2} (\mathbf{I} - \mathbf{b}^{-1}). \quad (3.12)$$

3.2 Stress and Balance Equations

On a body $\mathcal{B}$, the Cauchy stress vector $\mathbf{t}$ refers to a force per unit area of the deformed surface with a unit normal vector

$$\mathbf{t} = \lim_{\Delta a \rightarrow 0} \frac{\Delta \mathbf{p}}{\Delta a}. \quad (3.13)$$

According to the *Cauchy postulate*, the stress vector $\mathbf{t}$ is only dependent on the unit normal $\mathbf{n}$ and not on any other characteristic of the surface. This mapping between the stress vector and the unit normal can be represented with the help of a second order tensor called the *Cauchy stress tensor*

$$\mathbf{t} = \boldsymbol{\sigma} \mathbf{n}, \text{ where } \boldsymbol{\sigma} = \sigma^{ij} \mathbf{e}_i \otimes \mathbf{e}_j. \quad (3.14)$$

The fundamental relations of continuum mechanics are the balance relations. They are stated in the following briefly and without proof. The derivations can be found in [23] and [8].

3.2.1 Balance of Mass

For a closed system, the total mass is conserved i.e. over a given period of time, the change in mass ($\dot{m}$) is zero. This implies that the mass of the body in the reference configuration is equal to the mass of the body in the current configuration.

$$\dot{m} = 0, \quad (3.15)$$

$$\rho \, dv = \rho_0 \, dV, \quad (3.16)$$

where ρ and dv are the mass density and the volume of the body in the current configuration, and ρ_0 and dV are the density and volume of the body in the reference configuration.

3.2.2 Balance of Linear Momentum

The rate of change of linear momentum of a body is equal to the sum of the external forces acting on the body.

$$\begin{cases} \operatorname{div} \boldsymbol{\sigma} + \mathbf{f} = \rho \ddot{\mathbf{x}}, \\ \sigma^{ij}|_j + f^i = \rho a^i, \end{cases} \quad (3.17)$$

where $\mathbf{f}$ is the sum of forces acting on a body excluding inertia, $\mathbf{a} := \ddot{\mathbf{x}} = a^i \mathbf{e}_i$ is the acceleration of a particle with the position vector $\mathbf{x}$. The First Piola-Kirchhoff stress tensor can be used to represent the linear momentum balance in the reference configuration that can be written as

$$\begin{cases} \operatorname{Div} \mathbf{P} + \mathbf{f}_0 = \rho_0 \ddot{\mathbf{x}}, \\ P^{ij}|_j + f_0^i = \rho_0 a_0^i. \end{cases} \quad (3.18)$$

In (3.17) and (3.18), the differential operators $(\bullet)|_j$ and $(\bullet)|_j$ are the covariant derivatives in the current and the reference configurations respectively.

3.2.3 Balance of Angular Momentum

The rate of change of angular momentum of a body is equal to the resultant moment of the external forces acting on the body.

$$\int_B \rho(\mathbf{x} \times \mathbf{v}) = \int_B \rho(\mathbf{x} \times \mathbf{b}) + \int_{\partial B} (\mathbf{x} \times \mathbf{t}). \quad (3.19)$$

This results in the local balance of angular momentum which simply requires the Cauchy stress tensor to be symmetric

$$\boldsymbol{\sigma} = \boldsymbol{\sigma}^T, \quad (3.20)$$

$$\sigma_{ij} = \sigma_{ji}. \quad (3.21)$$

3.2.4 Balance of Kinetic Energy

An extension of (3.17), is the balance of kinetic energy which states that the power of external forces P is equal to the sum of the stress power W and the change in kinetic energy $\dot{K}$ of a body.

$$P = W + \dot{K}, \quad (3.22)$$

$$\int_B \rho \bar{\mathbf{b}} \cdot \mathbf{v} dv + \int_{\partial B} \mathbf{t} \cdot \mathbf{v} da = \int_B \boldsymbol{\sigma} : \mathbf{d} dv + \int_B \frac{1}{2} \rho \mathbf{v} \cdot \mathbf{v} dv.$$

Represented by the Cauchy stress tensor, $\boldsymbol{\sigma}$, and the rate of deformation tensor, $\mathbf{d}$, the stress power can be decomposed further into heat production, $\mathcal{D}$ and the stored energy density, Ψ , as follows

$$W = \mathcal{D} + \int_B \dot{\Psi} dV_0. \quad (3.23)$$

3.2.5 Conservation of Energy

The First Law of Thermodynamics states that the rate of change of the total energy $\dot{E}$ of a system is equal to the sum of the mechanical power of the external loads P and the heat supplied Q to the system.

$$\dot{E} = P + Q, \quad (3.24)$$

$$\frac{d}{dt} \left[\int_B \frac{1}{2} \rho \mathbf{v} \cdot \mathbf{v} dv + \int_B \rho u dv \right] = \int_B \rho \bar{\mathbf{b}} \cdot \mathbf{v} dv + \int_{\partial B} \mathbf{t} \cdot \mathbf{v} da - \int_{\partial B} \mathbf{q} \cdot \mathbf{n} da + \int_B \rho r dv,$$

where $\mathbf{q}$ and $\mathbf{n}$ are the heat flux vector and the surface normal respectively, and r is the distributed inner heat source.

3.3 Constitutive Relations

Constitutive relations are the properties of the material under investigation. They characterise the material response of a body and are necessary to complete the system of differential equations for the solution of boundary value problems [8]. Materials in the real world can exhibit incredibly diverse behaviours making it necessary for the constitutive relations to have a degree of approximation involved in their formulation. However, the relations must agree with the observed experimental behaviours. All constitutive relations must satisfy the second law of thermodynamics and three general principles that are known as *Noll's axioms*. These are the *principle of determinism*, which states that the stress in a particular point can be determined by the stress history at that point; the *principle of local action*, that

states that the stress at a particular point is affected by the motion of the particles in immediate neighbourhood of that point; and the *principle of material objectivity*, which states that the choice of coordinate system should not affect the material properties. Hyperelastic materials can be characterised by having zero heat dissipation. Thus the stress power (3.23) reduces to

$$W = \int_B \dot{\Psi} dV_0. \quad (3.25)$$

Comparing equations (3.22) and (3.25), according to [8],

$$\begin{aligned} \dot{\Psi} &= \mathbf{J} \boldsymbol{\sigma} : \mathbf{d} = \mathbf{S} : \frac{1}{2} \dot{\mathbf{C}} = 2 \frac{\partial \Psi}{\partial \mathbf{C}} : \frac{1}{2} \dot{\mathbf{C}}, \\ \therefore \mathbf{S} &= 2 \frac{\partial \Psi}{\partial \mathbf{C}}. \end{aligned} \quad (3.26)$$

Neo-Hookean materials are examples of hyperelastic materials. The model can be used to approximate the behaviour of rubber like materials fairly accurately for strains upto 20% [7]. Given a Neo-Hookean material model defined as,

$$\boldsymbol{\sigma} = \frac{\mu}{J} (\mathbf{b} - \mathbf{I}) + \frac{\Lambda}{J} \ln J \mathbf{I} \quad (3.27)$$

The expression for the compliance matrix in the reference configuration can be written as

$$\mathbb{C} = 4 \frac{\partial^2 \Psi}{\partial \mathbf{C} \partial \mathbf{C}} = 2 \frac{\partial \mathbf{S}}{\partial \mathbf{C}} \quad (3.28)$$

where $\mathbf{S}$ is the second Piola-Kirchhoff stress tensor which is defined as,

$$\mathbf{S} = J \mathbf{F}^{-1} \boldsymbol{\sigma} \mathbf{F}^{-T} \quad (3.29)$$

The given material model can be written using the Second Piola Kirchhoff Stress Tensor.

$$\mathbf{S} = \mu (\mathbf{I} - \mathbf{C}^{-1}) + \Lambda \ln J \mathbf{C}^{-1} \quad (3.30)$$

The compliance matrix is a fourth order tensor and using (3.30) and (3.28) can be written in the indicial form as follows

$$\mathbb{C}_{j.b}^{i.a} = 2 (-\mu + \Lambda \ln J) \left(\mathbf{C}^{-1} \right)_{.a}^i \left(\mathbf{C}^{-1} \right)_{.j}^b + \Lambda \left(\mathbf{C}^{-1} \right)_{.j}^i \left(\mathbf{C}^{-1} \right)_{.b}^a. \quad (3.31)$$

Applying push-forward to (3.31) to transform $\mathbb{C}$ to the current configuration,

$$\mathbb{C}_{j.b}^{i.a} = 2 (-\mu + \Lambda \ln J) \delta_{.a}^i \delta_{.j}^b + \frac{\Lambda}{2} \delta_{.j}^i \delta_{.b}^a. \quad (3.32)$$

3.4 Weak Form

Using the strong form of the linear momentum balance, (3.17), the weak form can be derived using a test function as described in Section 2.1 and the contributions can be separated into *internal virtual work* and *external virtual work*. A derivation of the weak form using general curvilinear coordinates can be found in Section 4.4, which can be reduced to obtain the following

$$\underbrace{\int_B \text{grad}(\mathbf{w}) : \boldsymbol{\sigma} dv}_{\text{internal virtual work}} - \underbrace{\int_B \mathbf{w} \cdot \rho \bar{\mathbf{b}} dv - \int_{\partial_t B} \mathbf{w} \cdot \bar{\mathbf{t}} da}_{\text{external virtual work}} = 0 \quad (3.33)$$

where the contributions of the internal virtual work and external virtual work can be defined as G_{int} and G_{ext} respectively.

3.5 Discretisation

The reference configuration $\mathcal{S}_0$ is discretised into a set of finite elements, Ω_0^e that are defined by nodal points $\mathbf{X}$. Thus, the current configuration is composed by finite elements Ω^e with nodal points $\mathbf{x}$ that are related to $\mathbf{X}_I$ through relations described in 3.1.

After the discretisation of the domain into finite elements, the shape functions can be used to discretise the nodal variables in the reference and current configurations $\mathbf{X}$ and $\mathbf{x}$, the primary field variables $\mathbf{u}$, and the test functions $\mathbf{w}$ within each finite element can be discretised using the shape functions according to the isoparametric concept as described in Section 2.3. Given a finite element domain, Ω , and shape functions, $\mathbf{N}^e$,

$$\mathbf{X} \approx \mathbf{X}^h = \sum_{k=1}^{n_{en}} N_k^e \mathbf{X}_n^e = \mathbf{N}^e \mathbf{X}^e, \quad (3.34)$$

$$\mathbf{x} \approx \mathbf{x}^h = \sum_{k=1}^{n_{en}} N_k^e \mathbf{x}_n^e = \mathbf{N}^e \mathbf{x}^e, \quad (3.35)$$

$$\mathbf{u} \approx \mathbf{u}^h = \sum_{k=1}^{n_{en}} N_k^e \mathbf{u}_n^e = \mathbf{N}^e \mathbf{u}^e, \quad (3.36)$$

$$\mathbf{w} \approx \mathbf{w}^h = \sum_{k=1}^{n_{en}} N_k^e \mathbf{w}_n^e = \mathbf{N}^e \mathbf{w}^e, \quad (3.37)$$

where the summation is carried over the n_{en} nodes of the element. Using the above given definitions, and the weak form of the momentum balance (3.33), the discretised form of the weak form in its internal virtual work contributions as summed over n_{el} elements can be given as,

$$G_{int} \approx G_{int}^e = \sum_{e=1}^{n_{el}} G_{int}^e, \text{ where } G_{int}^e = \int_{\Omega^e} \text{grad}(\mathbf{w}) : \boldsymbol{\sigma} dv$$

$$\text{and } G_{int}^e = \mathbf{w}_e^T \int_{\Omega^e} \mathbf{B}_e^T \boldsymbol{\sigma}_v dv =: \mathbf{w}_e^T \mathbf{f}_{int}^e \quad (3.38)$$

As the Cauchy stress tensor is symmetric in this framework, to ease computation we can take use of the Voigt notation. Thus, $\boldsymbol{\sigma}_v$ is the stress tensor written in the Voigt notation,

$$\boldsymbol{\sigma}_v = \begin{Bmatrix} \sigma_{11} \\ \sigma_{22} \\ \sigma_{33} \\ \sigma_{23} \\ \sigma_{31} \\ \sigma_{12} \end{Bmatrix} \quad (3.39)$$

And the matrix $\mathbf{B}_e$ is defined as,

$$\mathbf{B}_e := [\mathbf{B}_1, \mathbf{B}_2, \dots, \mathbf{B}_n],$$

$$\mathbf{B}_A = \begin{bmatrix} N_{A,x_1} & 0 & 0 \\ 0 & N_{A,x_2} & 0 \\ 0 & 0 & N_{A,x_3} \\ 0 & N_{A,x_3} & N_{A,x_2} \\ N_{A,x_3} & 0 & N_{A,x_1} \\ N_{A,x_2} & N_{A,x_1} & 0 \end{bmatrix} \quad (3.40)$$

Similarly, the external virtual work can be discretised,

$$G_{\text{ext}} \approx G_{\text{ext}}^e = \sum_{e=1}^{n_{el}} G_{\text{ext}}^e, \quad \text{where, } G_{\text{ext}}^e = \mathbf{w}_e^T \left[\int_{\Omega^e} \mathbf{N}^T \rho \bar{\mathbf{b}} dv + \int_{\Gamma^e} \mathbf{N}^T \bar{\mathbf{t}} da \right] =: \mathbf{w}_e^T \mathbf{f}_{\text{ext}}^e \quad (3.41)$$

Assembly of these force vectors, $\mathbf{f}_{\text{int}}^e$ and $\mathbf{f}_{\text{ext}}^e$, based on the element connectivity results in the discretised weak form,

$$\mathbf{w}^T [\mathbf{f}_{\text{int}} - \mathbf{f}_{\text{ext}}] = 0. \quad (3.42)$$

3.6 Newton Raphson Method and Linearisation

The Newton-Raphson method is an iterative method that can be used to approximate the roots of a nonlinear system of equations. The algorithm subdivides a nonlinear system into linearised sub-problems and arrives at the global solution through the sequential solution of the sub-problems. A given system of nonlinear equations,

$$\mathbf{f}(\mathbf{u}) = \mathbf{0}, \quad (3.43)$$

can be linearised using the Taylor series expansion as,

$$\mathbf{f}(\mathbf{u} + \Delta \mathbf{u}) = \mathbf{f}(\mathbf{u}) + D\mathbf{f}(\mathbf{u}) \cdot \Delta \mathbf{u}, \quad (3.44)$$

after having ignored the higher order terms. In (3.44), $D\mathbf{f}(\mathbf{u})$ is the directional derivative of $\mathbf{f}$ at $\mathbf{u}$. $D\mathbf{f}(\mathbf{u})$ can be written using the general *Gâteaux* derivative [17]. However, if $D\mathbf{f}(\mathbf{u})$ is linear in $\Delta \mathbf{u}$, it can be written using the *Frechét* differential of $\mathbf{f}$ at $\mathbf{u}$ as,

$$D\mathbf{f}(\mathbf{u}) := \mathbf{f}'(\mathbf{u}) \cdot \Delta \mathbf{u}, \text{ where, } f'_{ij}(\mathbf{u}) = \frac{\partial f_i}{\partial u_j}(\mathbf{u}). \quad (3.45)$$

In (3.45), $\mathbf{f}'(\mathbf{u})$ can be called the Jacobian or the tangent matrix.

Since the test functions in (3.42) are arbitrary, the system of equations reduce to

$$\mathbf{f} = \mathbf{f}_{\text{int}} - \mathbf{f}_{\text{ext}} = \mathbf{0}. \quad (3.46)$$

To be able to use the Newton method to solve (3.46), the tangent matrix related to $\mathbf{G}_{\text{int}}$ needs to be calculated. Linearising $\mathbf{G}_{\text{int}}$ at the element level,

$$DG_{\text{int}}^e(\mathbf{u}, \Delta \mathbf{u}) \approx \mathbf{w}_e^T \int_{\Omega_0^e} \mathbf{N}_{,i}^T \sigma_{ij} \mathbf{N}_{,j} dv \Delta \mathbf{u}_e + \mathbf{w}_e^T \int_{\Omega_0^e} \mathbf{B}^T \mathbf{c}_v \mathbf{B} dv \Delta \mathbf{u}_e \quad (3.47)$$

where


$$\mathbf{N}_{,i} = \frac{\partial \mathbf{N}}{\partial x^i} \quad (3.48)$$

and $\mathbb{C}_v$ is the compliance matrix as derived in equation (3.32) written in the Voigt notation.

3.7 Numerical Examples

The validation of the nonlinear Finite Element framework is done by considering two examples of a clamped beam with a prescribed displacement and a prescribed load at the unclamped end respectively. The length (normalised as $\frac{L}{L_0}$) and height (normalised as $\frac{H}{H_0}$) of the beam are taken to be 20 and 1 unit respectively and plane strain conditions are assumed. The beam is meshed with standard quadrilateral Lagrangian elements and the mesh can be refined with decreasing the element size or increasing the order of the approximation polynomial. The nodes on the clamped end of the beam are constrained in the x-direction. Additionally, the node on the clamped end that lies on the neutral axis of the beam is constrained in the y-direction. In the case of a prescribed displacement, the node lying on the neutral axis at the unclamped end is additionally assigned the prescribed displacement. No such constraint is applied to the aforementioned node in the case of the load driven boundary conditions. Both examples are utilised numerical integration as described in Section 2.4 and the system of equations are solved using the Newton method. Figures 3.2a and 3.2b on the next page depict the deformation of the beam at various stages of deformation with the normal stress in the y-direction shown through the elements for the prescribed displacement and load conditions respectively.

In this section we developed a Finite Element framework to study large deformations and considered a numerical example for validation. The main aim of this framework was to serve as a halfway point between the simple Finite Element framework for the solution of boundary value problems and the development of a framework applicable to thin structures in curvilinear coordinates. Thus, a relatively simple numerical example was considered as the purpose was to test the functionality of the developed sub-functions for the manipulation of kinematical quantities, application of boundary conditions, and the solution of the nonlinear system of equations. The next section extends this framework to curvilinear coordinates.

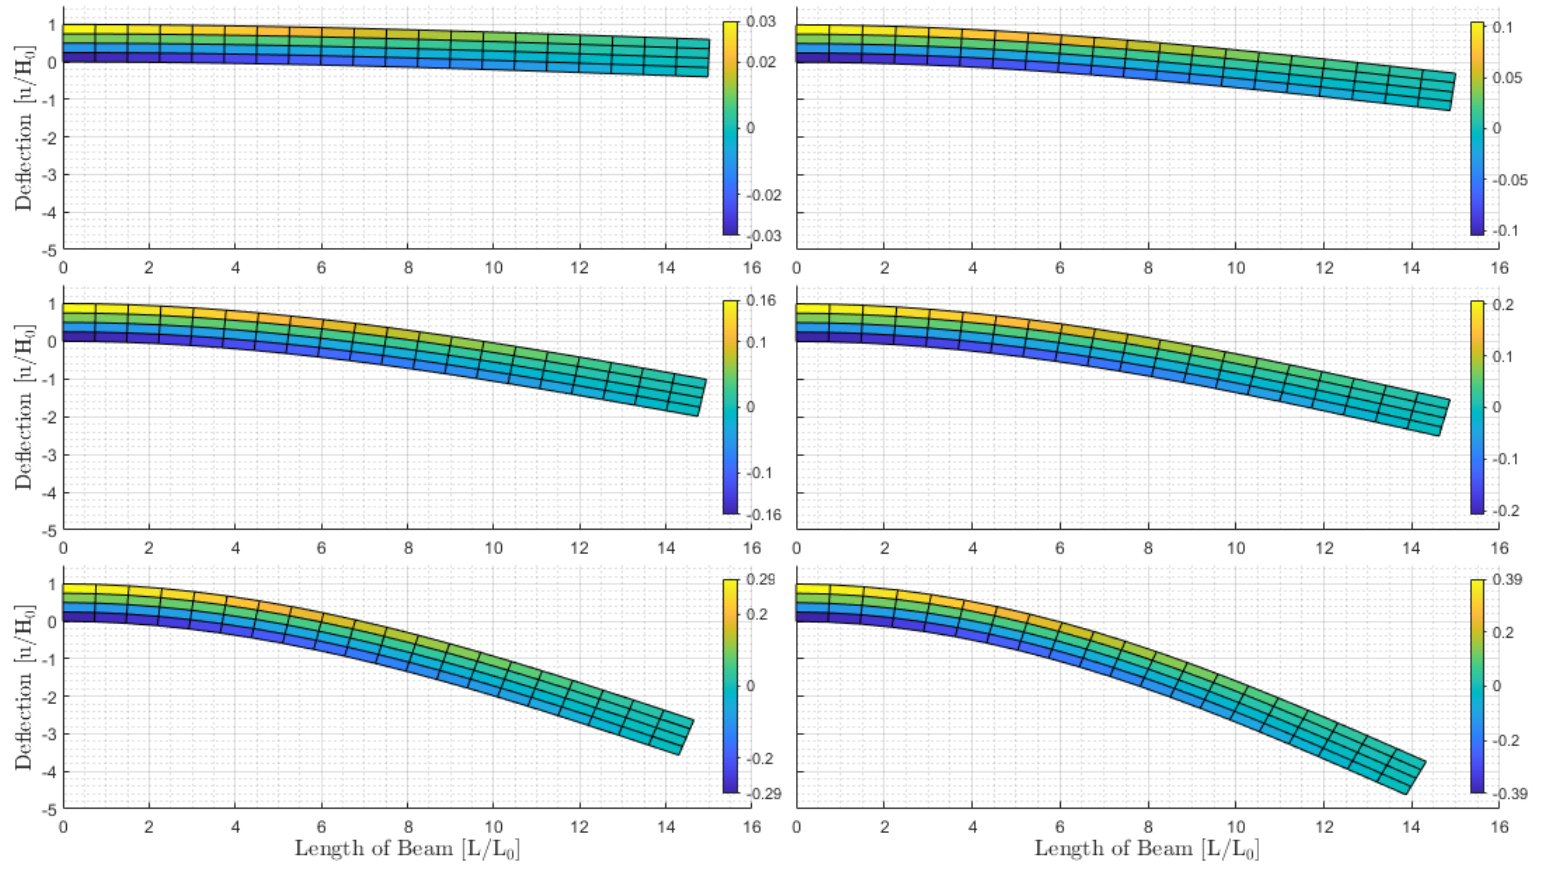

(A) Displacement driven boundary conditions

(B) Force driven boundary conditions

FIGURE 3.2: Numerical analysis of cantilever beam under various boundary conditions

4 Nonlinear FEM Framework in Curvilinear Basis

4.1 Curvilinear Coordinates

Extending the continuum mechanics formulation to the formulation of shells, it becomes impossible to describe them using an orthogonal basis system for obvious reasons. Thus it is necessary to use a curvilinear coordinate system to account for the bent surface. Although shell model are often formulated using local cartesian coordinate systems as the classical relations described in the previous section can be extended to account for shells. However, the formulation under investigation feels unnecessary to make this detour and the relevant mathematics is described using curvilinear coordinates. The membrane surface, denoted $\mathcal{S}$, is fully characterised by the parametric description,

$$\mathbf{x} = \mathbf{x}(\xi^1, \xi^2). \quad (4.1)$$

This is the mapping of the point (ξ^1, ξ^2) in the parameter domain $\mathcal{P}$ to the material point $\mathbf{x} \in \mathcal{S}$. According to the non-standard tensor notation used in continuum mechanics, Greek indices take on the values 1 and 2 on the surface. And as in the previous section, lower case Latin indices take the values 1, 2, and 3, in Euclidean space and summation is implied on repeated indices. The tangent vectors that form the basis at a coordinate ξ^α at point $\mathbf{x} \in \mathcal{S}$ are given by,

$$\mathbf{a}_\alpha = \frac{\partial \mathbf{x}}{\partial \xi^\alpha}, \quad \alpha = 1, 2 \quad (4.2)$$

In general, they are not orthonormal. This basis is thus characterised by the *first fundamental form* of the surface known as the covariant metric tensor,

$$a_{\alpha\beta} := \mathbf{a}_\alpha \cdot \mathbf{a}_\beta. \quad (4.3)$$

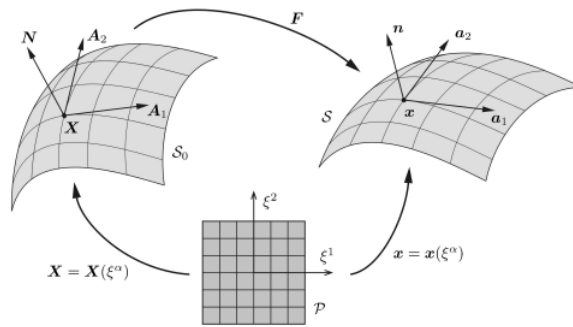


FIGURE 4.1: Configuration and motion of a continuum surface in curvilinear coordinates (Image Source: [16]).

In case of an orthonormal basis system, the covariant metric tensor reduces to the identity tensor. The contravariant components of the metric tensor can be obtained by its inversion as

$$[a^{\alpha\beta}] := [a_{\alpha\beta}]^{-1}. \quad (4.4)$$

This enables the construction of a dual basis - the contra-variant counterparts of the covariant base vectors, $\mathbf{a}_\alpha$,

$$\mathbf{a}^\alpha := a^{\alpha\beta} \mathbf{a}_\beta, \quad (4.5)$$

$$\mathbf{a}^\alpha \cdot \mathbf{a}^\beta = a^{\alpha\beta}, \quad (4.6)$$

$$\mathbf{a}_\alpha \cdot \mathbf{a}^\beta = \delta_\alpha^\beta, \quad (4.7)$$

where δ_α^β is the Kronecker delta. The unit normal at a point $\mathbf{x} \in \mathcal{S}$ is defined by,

$$\mathbf{n} = \frac{\mathbf{a}_1 \times \mathbf{a}_2}{\|\mathbf{a}_1 \times \mathbf{a}_2\|} = \frac{\mathbf{a}_1 \times \mathbf{a}_2}{\sqrt{\det a_{\alpha\beta}}}. \quad (4.8)$$

Any vector, $\mathbf{v}$ on $\mathcal{S}$ can thus be decomposed using the covariant or the contravariant basis,

$$\mathbf{v} = v^\alpha \mathbf{a}_\alpha + v_n \mathbf{n} = v_\alpha \mathbf{a}^\alpha + v_n \mathbf{n}, \quad (4.9)$$

where v_α and v^α denote the covariant and the contravariant components of the vector respectively. The derivative and the co-variant derivative of the tangent vectors, $\mathbf{a}_\alpha$, can be defined as,

$$\mathbf{a}_{\alpha,\beta} = \frac{\partial \mathbf{a}_\alpha}{\partial \bar{\xi}^\beta}, \quad (4.10)$$

$$\mathbf{a}_{\alpha;\beta} := \mathbf{a}_{\alpha,\beta} - (\mathbf{a}_{\alpha,\beta} \cdot \mathbf{a}^\gamma) \mathbf{a}_\gamma = \mathbf{a}_{\alpha,\beta} - \Gamma_{\alpha\beta}^\gamma \mathbf{a}_\gamma, \quad (4.11)$$

where $\Gamma_{\alpha\beta}^\gamma$ are the Christoffel symbols of the second kind. Defining the identity tensor on the surface, $\mathcal{S}$,

$$\mathbf{1} = \mathbf{a}_\alpha \otimes \mathbf{a}^\alpha = \mathbf{a}^\alpha \otimes \mathbf{a}_\alpha = \tilde{\mathbf{1}} - \mathbf{n} \otimes \mathbf{n}, \quad (4.12)$$

where $\tilde{\mathbf{1}}$ is the usual identity tensor in $\mathbb{R}^3$, two results can be derived.

$$\mathbf{a}_{\alpha;\beta} = (\mathbf{n} \otimes \mathbf{n}) \mathbf{a}_{\alpha,\beta}. \quad (4.13)$$

The *second fundamental form* of the surface relates the change in the direction of the normal vector to the surface as the parametric coordinates are varied. This is known as the curvature tensor with covariant components¹ $\mathbf{b} = b_{\alpha\beta} \mathbf{a}^\alpha \otimes \mathbf{a}^\beta$, where

$$b_{\alpha\beta} := \mathbf{n} \cdot \mathbf{a}_{\alpha;\beta} = \mathbf{n} \cdot \mathbf{a}_{\alpha,\beta}. \quad (4.14)$$

4.2 Kinematics

As defined in Section 3.1, to consider the deformation of the membrane surface, we distinguish between the reference configuration, $\mathcal{S}_0$, and the current configuration, $\mathcal{S}$. To describe quantities on $\mathcal{S}$, are written in lowercase symbols - $\mathbf{x}, \mathbf{a}_\alpha, \mathbf{a}^\alpha, \mathbf{n}, a_{\alpha\beta}, b_{\alpha\beta}$. Correspondingly, uppercase symbols are used to describe the quantities on $\mathcal{S}_0$. The deformation

¹The proofs to (4.13) and (4.14) can be found in the appendix, (B.2) and (B.3).

of a line element in $\mathcal{S}_0$ can be described using the Deformation tensor,

$$\begin{aligned} d\mathbf{x} &= \mathbf{a}_\alpha \otimes \mathbf{A}^\alpha d\mathbf{X}, \\ \text{where } d\mathbf{X} &= \frac{\partial \mathbf{X}}{\partial \xi^\alpha} d\xi^\alpha = \mathbf{A}_\alpha d\xi^\alpha, \\ \text{and } d\mathbf{x} &= \mathbf{a}_\alpha d\xi^\alpha. \end{aligned}$$

The following transformations can be described using $\mathbf{F}$,

$$\mathbf{a}_\alpha = (\mathbf{a}_\alpha \otimes \mathbf{A}^\alpha) \mathbf{A}_\alpha = \mathbf{F} \mathbf{A}_\alpha, \quad \mathbf{a}^\alpha = (\mathbf{a}^\alpha \otimes \mathbf{A}_\alpha) \mathbf{A}^\alpha = \mathbf{F}^{-T} \mathbf{A}^\alpha, \quad (4.15)$$

$$\mathbf{A}_\alpha = (\mathbf{A}_\alpha \otimes \mathbf{a}^\alpha) \mathbf{a}_\alpha = \mathbf{F}^{-1} \mathbf{a}_\alpha, \quad \mathbf{A}^\alpha = (\mathbf{A}^\alpha \otimes \mathbf{a}_\alpha) \mathbf{a}^\alpha = \mathbf{F}^T \mathbf{a}^\alpha. \quad (4.16)$$

The right and left Cauchy-Green surface tensors are,

$$\mathbf{C} = \mathbf{F}^T \mathbf{F} = a_{\alpha\beta} \mathbf{A}^\alpha \otimes \mathbf{A}^\beta, \quad \mathbf{C}^{-1} = (\mathbf{F}^T \mathbf{F})^{-1} = a^{\alpha\beta} \mathbf{A}_\alpha \otimes \mathbf{A}_\beta, \quad (4.17)$$

$$\mathbf{b} = \mathbf{F} \mathbf{F}^T = A^{\alpha\beta} \mathbf{a}_\alpha \otimes \mathbf{a}_\beta, \quad \mathbf{b}^{-1} = (\mathbf{F} \mathbf{F}^T)^{-1} = A_{\alpha\beta} \mathbf{a}^\alpha \otimes \mathbf{a}^\beta. \quad (4.18)$$

Similar to Section 3.1, the area elements on the surfaces can be related to each other with the help of the parametric coordinates (ξ^1, ξ^2) . The differential surface area in the current and reference configuration and their relation can be given as,

$$da := \|(\mathbf{a}_1 d\xi^1) \times (\mathbf{a}_2 d\xi^2)\| = \|\mathbf{a}_1 \times \mathbf{a}_2\| d\Box = \sqrt{\det a_{\alpha\beta}} d\Box =: J_a d\Box, \quad (4.19)$$

$$dA := \|\mathbf{A}_1 \times \mathbf{A}_2\| d\Box = \sqrt{\det A_{\alpha\beta}} d\Box =: J_A d\Box. \quad (4.20)$$

$$(4.21)$$

where $d\Box := d\xi^1 d\xi^2$. Using the above defined quantities,

$$da = \frac{J_a}{J_A} dA =: J dA. \quad (4.22)$$

4.3 Momentum Balance

At any given point, the Cauchy stress tensor $\boldsymbol{\sigma}$ can be written as,

$$\boldsymbol{\sigma} = \sigma^{\alpha\beta} \mathbf{a}_\alpha \otimes \mathbf{a}_\beta + \sigma^{3\alpha} (\mathbf{n} \otimes \mathbf{a}_\alpha + \mathbf{a}_\alpha \otimes \mathbf{n}) + \sigma^{33} \mathbf{n} \otimes \mathbf{n}. \quad (4.23)$$

As can be seen from (4.23), $\boldsymbol{\sigma}$ is symmetric in this formulation. For membranes, it can be assumed that $\sigma^{3\alpha} = \sigma^{33} = 0$, which reduces the stress tensor to the *in-plane Cauchy stress tensor*

$$\boldsymbol{\sigma} = \sigma^{\alpha\beta} \mathbf{a}_\alpha \otimes \mathbf{a}_\beta. \quad (4.24)$$

From the in-plane Cauchy tensor, the internal traction acting on the surface perpendicular to $\mathbf{a}^\alpha$ can be written as²,

$$\mathbf{t}^\alpha = \boldsymbol{\sigma} \mathbf{a}^\alpha = \sigma^{\beta\alpha} \mathbf{a}_\beta, \quad (4.25)$$

Given a distributed surface force, $\mathbf{f}$,

$$\mathbf{f} = f_\alpha \mathbf{a}^\alpha + p \mathbf{n} = f^\alpha \mathbf{a}_\alpha + p \mathbf{n}. \quad (4.26)$$

²The proof to (4.25) can be found in the appendix

the balance of linear momentum in its strong form is [18],

$$\mathbf{t}_{;\alpha}^\alpha + \mathbf{f} = \mathbf{0}. \quad (4.27)$$

Using (4.25) and (4.14), it can be derived that the covariant derivative of $\mathbf{t}^\alpha$ can be written as

$$\mathbf{t}_{;\alpha}^\alpha = \sigma_{;\alpha}^{\beta\alpha} \mathbf{a}_\beta + \sigma^{\beta\alpha} b_{\beta\alpha} \mathbf{n}. \quad (4.28)$$

This enables the decomposition of (4.27) into an equation for in-plane and out-of-plane equilibrium.

$$\begin{cases} \sigma_{;\alpha}^{\beta\alpha} + f^\beta = 0 & (\text{in-plane}) \\ \sigma^{\beta\alpha} b_{\beta\alpha} + p = 0 & (\text{out-of-plane}) \end{cases} \quad (4.29)$$

4.4 Weak Form

With the help of a mathematically admissible test function w on $\mathcal{S}$, to derive the weak form (4.27) can be written as

$$\int_{\mathcal{S}} w [\mathbf{t}_{;\alpha}^\alpha + \mathbf{f}] \, da = 0. \quad (4.30)$$

Decomposing w into its surface and normal components

$$0 = \int_{\mathcal{S}} [w_\gamma \mathbf{a}^\gamma + w \mathbf{n}] [\sigma_{;\alpha}^{\beta\alpha} \mathbf{a}_\beta + \sigma^{\beta\alpha} b_{\beta\alpha} \mathbf{n} + \mathbf{f}] \, da \quad (4.31)$$

and using $\mathbf{t} = m_\alpha \mathbf{t}^\alpha = m_\alpha \sigma^{\beta\alpha} \mathbf{a}_\beta$, the weak form can be written as ³

$$0 = \int_{\partial\mathcal{S}} w_\gamma \bar{t}^\gamma \, ds - \int_{\mathcal{S}} w_{\gamma;\alpha} \sigma^{\gamma\alpha} \, da + \int_{\mathcal{S}} w_\gamma f^\gamma \, da + \int_{\mathcal{S}} w \sigma^{\beta\alpha} b_{\beta\alpha} \, da + \int_{\mathcal{S}} w p \, ds, \quad (4.32)$$

thus making it possible to write

$$G_{\text{int}} - G_{\text{ext}} = 0 \quad \forall w \in \mathcal{W} \quad (4.33)$$

with

$$G_{\text{int}} := \int_{\mathcal{S}} w_{\alpha;\beta} \sigma^{\alpha\beta} \, da - \int_{\mathcal{S}} w \sigma^{\alpha\beta} b_{\alpha\beta} \, da \quad (4.34)$$

$$G_{\text{ext}} := \int_{\mathcal{S}} w_\alpha f^\alpha \, da + \int_{\partial\mathcal{S}} w_\alpha \bar{t}^\alpha \, ds + \int_{\mathcal{S}} w p \, da \quad (4.35)$$

With (B.11) it is possible to rewrite (4.34) as

$$G_{\text{int}} = \int_{\mathcal{S}} w_{;\alpha} \cdot \sigma^{\alpha\beta} \mathbf{a}_\beta \, da \quad (4.36)$$

4.5 Material Constitution

For a Neo-Hookean material with a given strain energy density function

$$W = \frac{\Lambda}{4} (J^2 - 1 - 2 \ln J) + \frac{\mu}{2} (I_1 - 2 - 2 \ln J) \quad (4.37)$$

³The complete derivation can be found in the Appendix B.2

and the traces of the right and left Cauchy-Green tensors in (4.17)

$$I_1 := \mathbf{C} : \mathbf{I}_0 = \mathbf{B} : \mathbf{I} = a_{\alpha\beta} \mathbf{A}^\alpha \otimes \mathbf{A}^\beta : \mathbf{A}_\gamma \otimes \mathbf{A}^\gamma = a_{\alpha\beta} \delta_\gamma^\alpha A^{\beta\gamma} = a_{\gamma\beta} A^{\beta\gamma} = a_{\alpha\beta} A^{\alpha\beta} \quad (4.38)$$

the Kirchhoff stress tensor can be written as

$$\tau^{\alpha\beta} = 2 \frac{\partial W}{\partial a_{\alpha\beta}} = \left(\frac{\Lambda}{2} (J^2 - 1) - \mu \right) a^{\alpha\beta} - \mu A^{\alpha\beta}. \quad (4.39)$$

Using (4.39), the compliance matrix in the current configuration

$$c^{\alpha\beta\gamma\delta} = \frac{\partial^2 W}{\partial a_{\alpha\beta} \partial a_{\gamma\delta}} = 2 \frac{\partial \tau^{\alpha\beta}}{\partial a_{\gamma\delta}} \quad (4.40)$$

can be written as⁴

$$c^{\alpha\beta\gamma\delta} = \Lambda J^2 a^{\alpha\beta} a^{\gamma\delta} + \left(\frac{\Lambda}{2} (J^2 - 1) - \mu \right) m^{\alpha\beta\gamma\delta}. \quad (4.41)$$

where

$$m^{\alpha\beta\gamma\delta} = \frac{1}{a} \left(e^{\alpha\gamma} e^{\delta\beta} + e^{\alpha\delta} e^{\gamma\beta} \right) - 2 a^{\alpha\beta} a^{\gamma\delta} \quad (4.42)$$

4.6 Volume Constraint

The volume enclosed by the membrane $\mathcal{S}$ may be constrained. For the volume enclosed by the reference configuration V_0 and the current configuration V , this can be defined as

$$g_v := V_0 - V = 0. \quad (4.43)$$

The enclosed volumes V and V_0 can be computed with the help of the following surface integrals

$$V = \frac{1}{3} \int_{\mathcal{S}} \mathbf{x} \cdot \mathbf{n} \, da, \quad V_0 = \frac{1}{3} \int_{\mathcal{S}_I} \mathbf{X} \cdot \mathbf{N} \, dA. \quad (4.44)$$

For quasi-static conditions, as is the case for the examples considered in this report, the medium enclosed by the membrane can be characterised by pressure and volume. Thus, g_v can be applied as a global constraint to the system.

4.7 Discretization

Following the procedures and nomenclature defined in Section 3.5, for quadrilateral finite elements Ω_0^e and Ω^e related to a reference element in the parametric space, the discretisations of the nodal variables in the current and the reference configurations are given according to (3.34). The tangent vectors (4.2) can be approximated by

$$\mathbf{a}_\alpha \approx \sum_I^{n_{en}} N_{I,\alpha} \mathbf{x}_I = \mathbf{N}_{,\alpha} \mathbf{x}_e \quad (4.45)$$

⁴A complete derivation can be found in the Appendix B.5.5

where summation is carried out over the n_{en} nodes of the element. The shape function matrix and its derivative with respect to the parametric coordinates is given as

$$\mathbf{N} := [N_1 \tilde{\mathbf{I}}, N_2 \tilde{\mathbf{I}}, \dots, N_{n_{en}} \tilde{\mathbf{I}}], \quad (4.46)$$

$$N_{I,\alpha} = \frac{\partial N_I}{\partial \xi^\alpha}. \quad (4.47)$$

Using (B.14), and (4.45), the internal virtual work over a finite element is discretised as

$$\begin{aligned} G_{\text{int}}^e &= \int_{\Omega_0^e} \mathbf{w}_{,\alpha} \cdot \tau^{\alpha\beta} \mathbf{a}_\beta dA \approx \mathbf{w}_e^T \int_{\Omega_0^e} \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA \mathbf{x}_e \\ &=: \mathbf{w}_e^T \mathbf{f}_{\text{int}}^e. \end{aligned} \quad (4.48)$$

The internal virtual work (4.34) can further be decomposed and discretised into its in-plane and out-of-plane components using (B.15) and the discretisation of the curvature tensor in order to obtain the corresponding force vectors, $\mathbf{f}_{\text{inti}}^e$ and $\mathbf{f}_{\text{into}}^e$

$$G_{\text{inti}}^e = \int_{\Omega_0^e} w_{\alpha;\beta} \tau^{\alpha\beta} dA \approx \mathbf{w}_e^T \mathbf{f}_{\text{inti}}^e = \mathbf{w}_e^T \int_{\Omega_0^e} \tau^{\alpha\beta} \left[\mathbf{N}_{,\alpha}^T \mathbf{N}_{,\beta} + \mathbf{N}^T (\mathbf{n} \otimes \mathbf{n}) \mathbf{N}_{,\alpha\beta} \right] dA \mathbf{x}_e, \quad (4.49)$$

$$G_{\text{into}}^e = - \int_{\Omega_0^e} w \tau^{\alpha\beta} b_{\alpha\beta} dA \approx \mathbf{w}_e^T \mathbf{f}_{\text{into}}^e = - \mathbf{w}_e^T \int_{\Omega_0^e} \tau^{\alpha\beta} \mathbf{N}^T (\mathbf{n} \otimes \mathbf{n}) \mathbf{N}_{,\alpha\beta} dA \mathbf{x}_e. \quad (4.50)$$

The external virtual work (4.35) can be discretised to yield the external force vector $\mathbf{f}_{\text{ext}}^e$,

$$\begin{aligned} G_{\text{ext}}^e &= \int_{\Omega_0^e} \mathbf{w} \cdot \mathbf{f}_0 dA + \int_{\partial_t \Omega^e} \mathbf{w} \cdot \bar{\mathbf{t}} ds + \int_{\Omega^e} w p da, \\ &\approx \mathbf{w}_e^T \left(\int_{\Omega_0^e} \mathbf{N}^T \mathbf{f}_0 dA + \int_{\partial_t \Omega^e} \mathbf{N}^T \bar{\mathbf{t}} ds + \int_{\Omega^e} \mathbf{N}^T p \mathbf{n} da \right) =: \mathbf{w}_e^T \mathbf{f}_{\text{ext}}^e. \end{aligned} \quad (4.51)$$

In (4.51), the external loading is assumed to be of the form $\mathbf{f} = \mathbf{f}_0/J + p\mathbf{n}$, where $\mathbf{f}_0$ and p are the specified loading parameters. Using (4.48) and (4.51), the discretised weak form can be written as

$$\mathbf{w}^T [\mathbf{f}_{\text{int}}^e - \mathbf{f}_{\text{ext}}^e] = 0. \quad (4.52)$$

Since the discretised test functions $\mathbf{w}$ are arbitrary and zero on the Dirichlet boundary, the system of discretised nonlinear equilibrium equations to be solved for the unknown nodal positions $\mathbf{x}$ is

$$\mathbf{f}(\mathbf{x}, p) := \mathbf{f}_{\text{int}} - \mathbf{f}_{\text{ext}} = 0. \quad (4.53)$$

For the volume constraint (4.43), V_0 can be prescribed externally, thus the discretisation of V is sufficient for the discretisation of g_v . The volume enclosed by the discretised membrane surface can be given as

$$V = \sum_{e=1}^{n_{el}} V^e = \frac{1}{3} \sum_{e=1}^{n_{el}} \int_{\Omega^e} \mathbf{n}^T \mathbf{N} dA \mathbf{x}_e. \quad (4.54)$$

Volume constraints are included in the formulation with the help of the Lagrange multiplier method. The multiplier associated with the constrain in this case is the pressure p acting on the membrane[Sauer 2014]. In this case, the nonlinear system of equations (4.53) is given

as

$$\mathbf{f}(\mathbf{x}, p) = \mathbf{0}, \quad (4.55)$$

$$g_v(\mathbf{x}) = 0, \quad (4.56)$$

that needs to be solved for the unknown nodal positions $\mathbf{x}$ and pressure p .

4.8 Linearization

As in Section 3.6, due to the existent nonlinearities in the system (4.53) will be solved using Newton's method. This requires consistent linearisation of the discrete system with respect to the variables involved. The derivations of linearised quantities required to formulate $\Delta \mathbf{f}_{\text{int}}^e$ and $\Delta \mathbf{f}_{\text{ext}}^e$ can be found in the Appendix B.5. The linearisation of $\mathbf{f}_{\text{int}}$ with respect to $\mathbf{x}$ at the element level can be given as

$$\begin{aligned} \Delta \mathbf{f}_{\text{int}}^e &= \int_{\Omega^e} \Delta \left[\mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} \mathbf{x}_e \right] dA \\ &= \underbrace{\int_{\Omega^e} c^{\alpha\beta\gamma\delta} \mathbf{N}_{,\alpha}^T (\mathbf{a}_\beta \otimes \mathbf{a}_\gamma) \mathbf{N}_{,\delta} dA}_{=: \mathbf{k}_{\text{mat}}^e} \Delta \mathbf{x}_e + \underbrace{\int_{\Omega^e} \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA}_{=: \mathbf{k}_{\text{geo}}^e} \Delta \mathbf{x}_e. \end{aligned} \quad (4.57)$$

The two contributions can be split into the tangent matrices associated with the internal virtual work - the *material* and the *geometric stiffness matrix* such that

$$\Delta \mathbf{f}_{\text{int}}^e = \left(\mathbf{k}_{\text{mat}}^e + \mathbf{k}_{\text{geo}}^e \right) \Delta \mathbf{x}_e. \quad (4.58)$$

For dead loading, the external force vector at the element level $\mathbf{f}_{\text{ext}}^e$ defined in (4.51) can be reduced to

$$\mathbf{f}_{\text{ext}}^e = \int_{\Omega^e} \mathbf{N}^T p \mathbf{n} da. \quad (4.59)$$

The reduced external force vector linearised with respect to $\mathbf{x}$ and the pressure p is given as

$$\begin{aligned} \Delta \mathbf{f}_{\text{ext}}^e &= \int_{\Omega^e} \rho \mathbf{N}^T (\mathbf{n} \otimes \mathbf{g}) da \Delta \mathbf{x}_e + \int_{\Omega^e} p \mathbf{N}^T (\mathbf{n} \otimes \mathbf{a}^\alpha - \mathbf{a}^\alpha \otimes \mathbf{n}) \mathbf{N}_{,\alpha} da \Delta \mathbf{x}_e \\ &=: \mathbf{k}_{\text{ext}}^e \Delta \mathbf{x}_e, \end{aligned} \quad (4.60)$$

where the tangent matrix associated with the external virtual work is $\mathbf{k}_{\text{ext}}^e$. At the element level, the linearisation of g_v^e can be given as

$$\begin{aligned} \Delta g_v^e &= \Delta V_0 - \frac{1}{3} \Delta \left[\int_{\Omega^e} \mathbf{n}^T \mathbf{N} da \mathbf{x}_e \right] \\ &= 0 - \frac{1}{3} \int_{\Omega^e} \mathbf{n}^T \mathbf{N} da \Delta \mathbf{x}_e - \frac{1}{3} \int_{\Omega^e} \mathbf{x} \cdot (\mathbf{n} \otimes \mathbf{a}^\alpha - \mathbf{a}^\alpha \otimes \mathbf{n}) \mathbf{n}_{,\alpha} da \Delta \mathbf{x}_e \\ &:= \mathbf{h}_v^e \Delta \mathbf{x}_e. \end{aligned} \quad (4.61)$$

When volume constraints are applicable, the internal pressure p_v acts as the unknown Lagrange multiplier and needs to be accounted for. Thus, the linearised external force vector with the constraint is given as

$$\Delta \mathbf{f}_{\text{ext}}^e = \mathbf{k}_{\text{ext}}^e \Delta \mathbf{x}_e + \mathbf{l}_{\text{ext}}^e \Delta p_v, \quad (4.62)$$

where

$$\mathbf{l}_{\text{ext}}^e = \frac{\partial \mathbf{f}_{\text{ext}}^e}{\partial p_v} = \int_{\Omega^e} \mathbf{N}^T \mathbf{n} \, da. \quad (4.63)$$

Using (4.57), (4.62), and (4.61), the tangent matrix associated with the constrained nonlinear system of equations (4.55) can be assembled as

$$\mathbf{k}^e := \begin{bmatrix} \mathbf{k}_{\text{int}}^e - \mathbf{k}_{\text{ext}}^e & -\mathbf{l}_{\text{ext}}^e \\ \mathbf{h}_v^e & 0 \end{bmatrix} \quad (4.64)$$

which describes the changes in $\mathbf{f}_{\text{int}} - \mathbf{f}_{\text{ext}}$ and g_v due to the changes in $\mathbf{x}_e$ and pressure p_v .

4.9 Numerical Examples: Inflation of Square Sheet

The validation of the framework is undertaken through the consideration of a square sheet with length $\frac{L}{L_0} = 10$ units and width $\frac{W}{W_0} = 10$ units respectively under gravitational loading and gravitational loading with a volume constraint. An isotropic pre-stretch of $\lambda_0 = 1.1$ is applied to provide an initial out-of-plane stiffness, remove existing instabilities, and the structure is then inflated. The sheet is meshed using standard quadrilateral Lagrangian elements with the additional possibility of h- and p-refinements. The real elements are mapped onto a master element onto which the numerical integration is carried out to solve the system of nonlinear equations. Figures 4.2 and 4.3 depict the inflation of the square sheet under gravitational loading and volume constraints respectively with the colouring denoting the first invariant of stress. As can be seen, for the case with gravitational loading, increasing values of stress are found at the boundaries of the sheet. On the contrary, for the case of loading with a volume constraint, maximum stress is seen at the bottom tip with increasing amounts of deformation.

Furthermore, the internal pressure is plotted against the enclosed volume in Figure 4.4 for

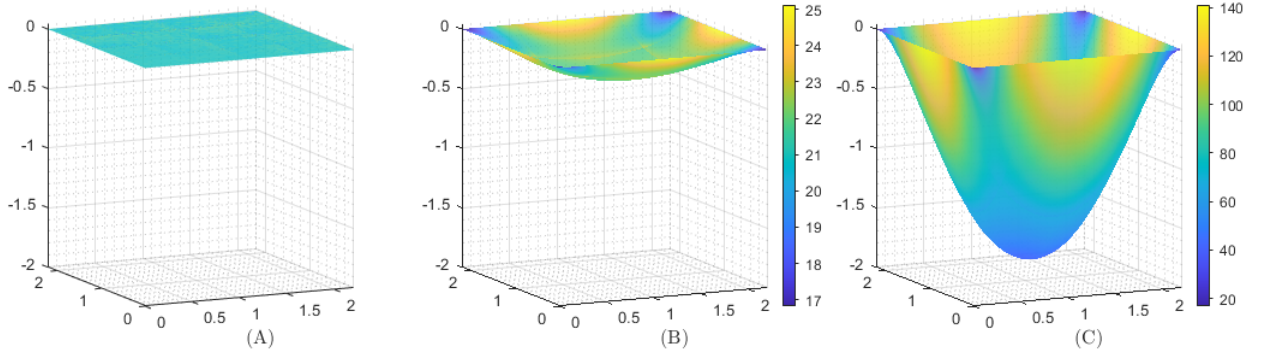


FIGURE 4.2: Inflation of square sheet under gravitational loading: Configurations for $V = \{0, 0.6, 6\} V_0$. The colouring denotes the first invariant of stress.

various orders of approximating polynomials for the case of loading with volume constraint. The significant difference between the results of linear Lagrange elements as opposed to the higher-order elements is a result of the higher-order elements capturing the shape of the deformed structure more accurately. The relation of internal pressure and enclosed volume begins to converge to some solution for quadratic and quintic polynomials.

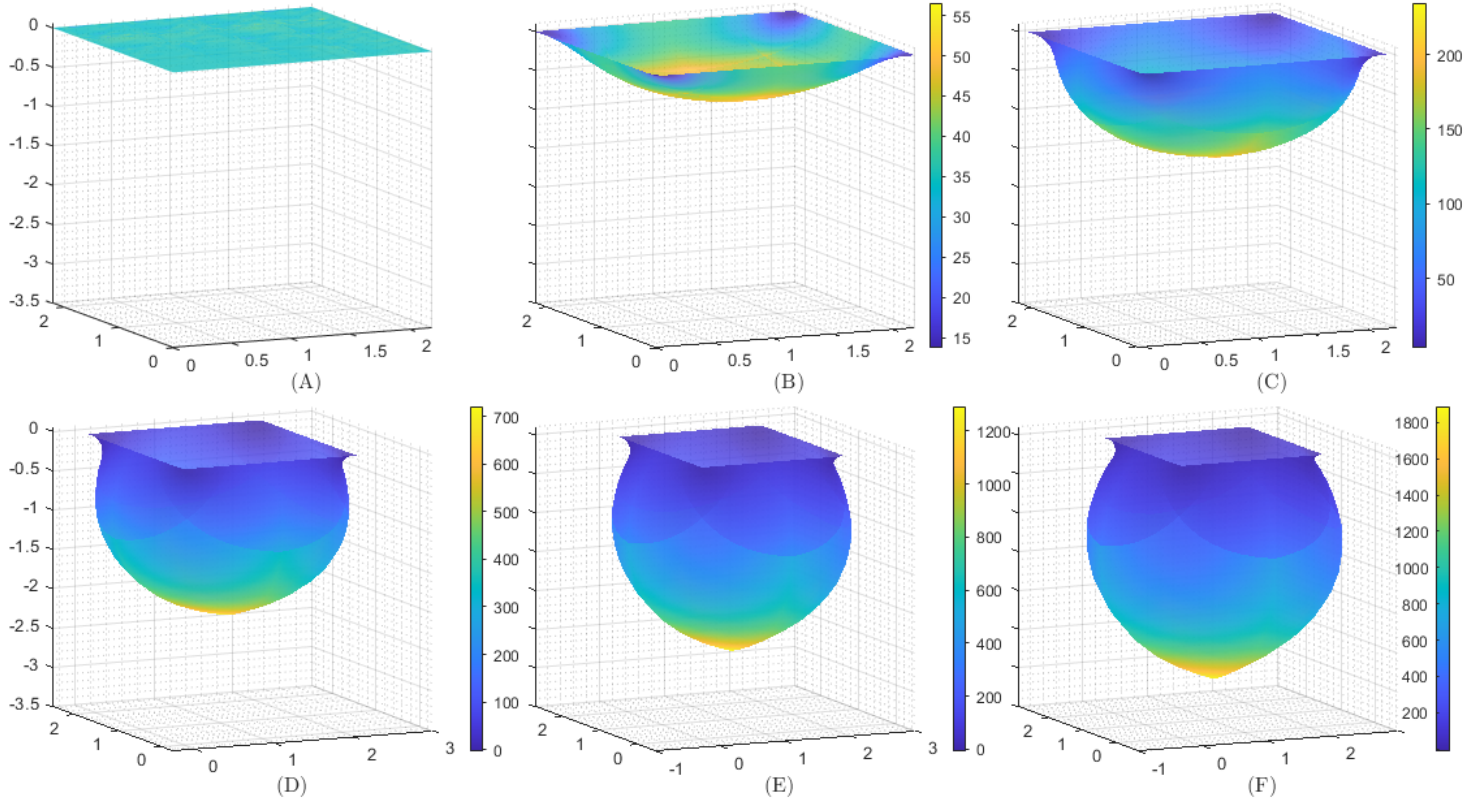


FIGURE 4.3: Inflation of square sheet under loading with volume constraint: Configurations for $V = \{0, 2, 5, 10, 15, 20\} V_0$. The colouring denotes the first invariant of stress.



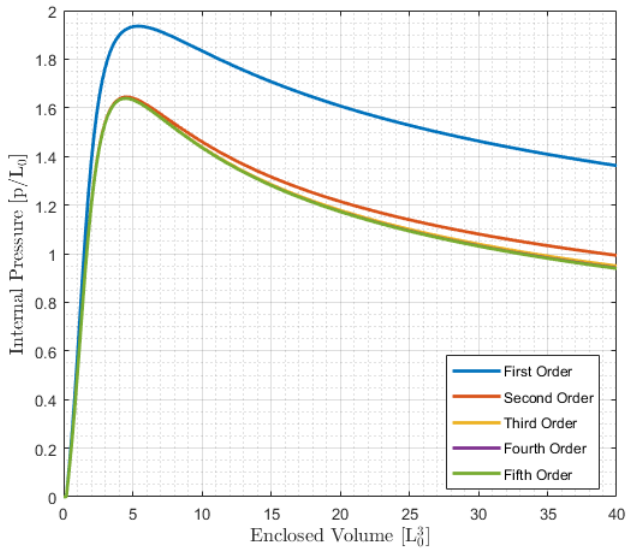


FIGURE 4.4: Internal pressure against volume for the inflation of square sheet


This is seen qualitatively in figure 4.5 which shows the deformed sheet for a prescribed volume of $V = 400V_0$ with 4×4 elements of various orders. With increasing order of the used approximation polynomial, the deformed configuration becomes smoother. For quadratic and cubic elements, the highest value of the first invariant of the stress tensor is found at a pronounced 'peak' at the bottom. Whereas in the quantic elements it disappears altogether, giving a smooth representation of the deformed structure. Based on this observation, one can state that the higher-order elements can represent the problem more accurately and closer to reality. Further improvements to the current framework can be achieved by using different approximation polynomials like isogeometric shape functions as can be seen in [16].

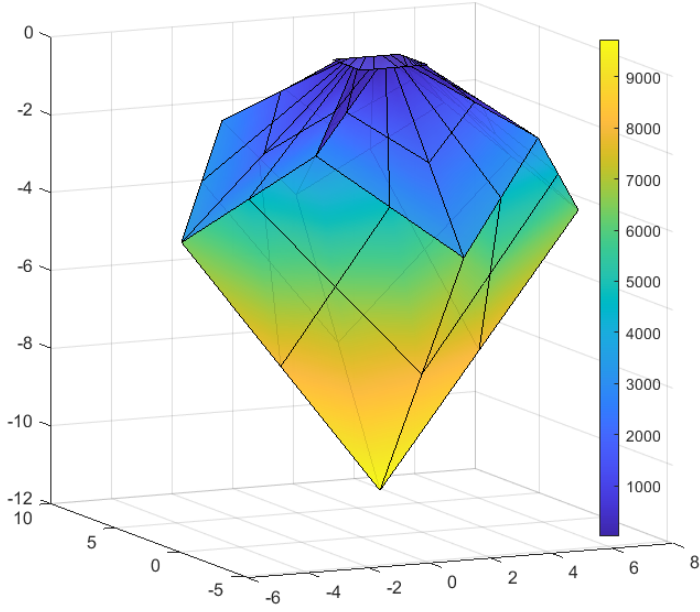


(A) 4x4 linear elements

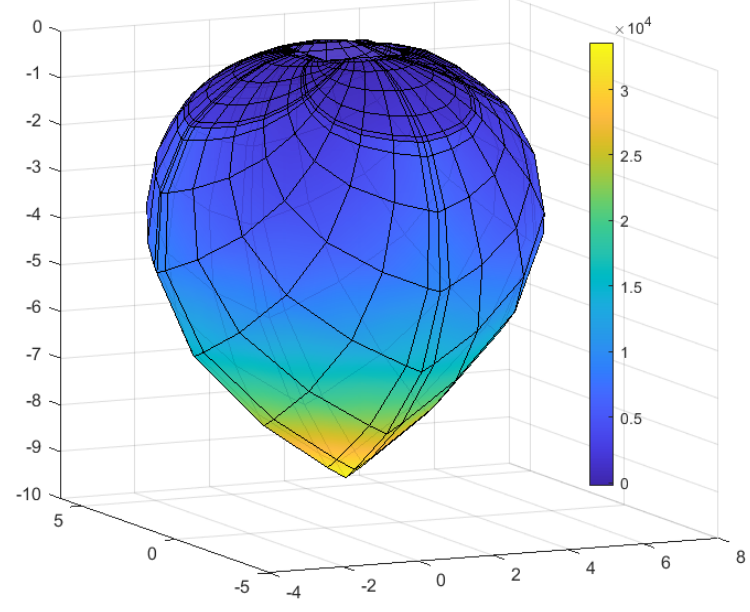

(B) 4x4 quadratic elements

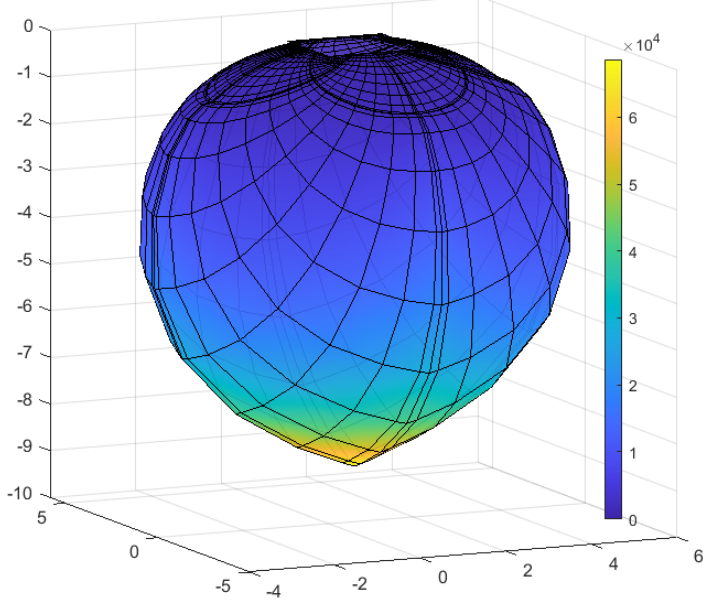

(C) 4x4 cubic elements

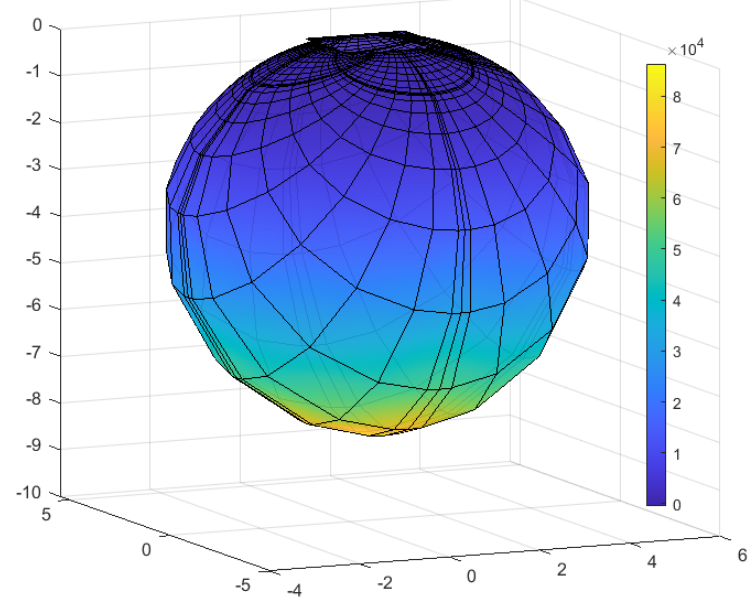

(D) 4x4 quintic elements

FIGURE 4.5: Inflated square sheet: $V = 400V_0$

5 Conclusion

A general nonlinear framework for the solution of rotation-free solid membranes is presented. The theory in Section 2 details the solution of general elliptic partial differential equations using the Finite Element Method. The function spaces of the test and trial functions are introduced for the well-posedness of the weak formulation necessary for a meaningful solution of the boundary value problem. Dirichlet, Neumann, and mixed boundary conditions are considered and the isoparametric parametric concept along with numerical quadrature is used to simplify the implementation of the solution on MATLAB. Section 3 develops a nonlinear framework for the solution of problems involving large deformations of beams in a Euclidean basis. Discretisation of general kinematical quantities, balance laws, and constitution is introduced. The resulting nonlinear system of equations is solved using the Newton-Raphson method. This framework is validated using simple numerical examples while comprehensively covering the load and displacement driven boundary conditions. After a thorough development of the foundation, Section 4 extends the previous chapters to develop the framework for curved structures. Based on the differential geometry of curved surfaces, the resulting framework is general, accounts for large deformations, and general material laws. The use of curvilinear coordinates further eases computation as the resulting formulation only uses three degrees of freedom, avoids the use of a local cartesian coordinate system, the transformation of derivatives, and allows the splitting of the strong and weak forms into the in-plane and out-of-plane parts allowing an easy extension of the framework to liquid membranes. The solution of the final nonlinear system is conducted using the theory developed in the previous chapters with the volume constraints being included in the system using the Lagrange multiplier method. This framework is validated through the consideration of the inflation of a square sheet. It is expected that the MATLAB implementation of the formulation will be able to reproduce the results of [16] in the future.

A Nonlinear Framework

A.1 Material Model Expressed in $\mathbf{S}$

Given the Cauchy stress tensor (3.27) and the definition of the Second Piola-Kirchhoff stress tensor, (3.29) can be written as,

$$\begin{aligned}
 \mathbf{S} &= J\mathbf{F}^{-1} \left[\frac{\mu}{J} (\mathbf{b} - \mathbf{I}) + \frac{\Lambda}{J} \ln J \mathbf{I} \right] \mathbf{F}^{-T} \\
 &= J \left[\frac{\mu}{J} (\mathbf{F}^{-1} \mathbf{b} - \mathbf{F}^{-1}) + \frac{\Lambda}{J} \ln J \mathbf{F}^{-1} \right] \mathbf{F}^{-T} \\
 &= J \left[\frac{\mu}{J} (\mathbf{F}^{-1} (\mathbf{F}\mathbf{F}^T) - \mathbf{F}^{-1}) + \frac{\Lambda}{J} \ln J \mathbf{F}^{-1} \right] \mathbf{F}^{-T} \\
 &= J \left[\frac{\mu}{J} (\mathbf{F}^T - \mathbf{F}^{-1}) \mathbf{F}^{-T} + \frac{\Lambda}{J} \ln J \mathbf{F}^{-1} \mathbf{F}^{-T} \right] \\
 &= \mu \left(\mathbf{F}^T \mathbf{F}^{-T} - (\mathbf{F}^T \mathbf{F})^{-1} \right) + \Lambda \ln J (\mathbf{F}^T \mathbf{F})^{-1}
 \end{aligned} \tag{A.1}$$

$$\therefore \mathbf{S} = \mu (\mathbf{I} - \mathbf{C}^{-1}) + \Lambda \ln J \mathbf{C}^{-1} \tag{A.2}$$

A.2 Derivation of Compliance Matrix in Reference Configuration

As the formulation assumes the existence of a cartesian basis, the right Cauchy-Green tensor and its inverse can be written,

$$\begin{aligned}
 \mathbf{C} &= C_{ij}^i \mathbf{e}_i \otimes \mathbf{e}^j \\
 \mathbf{C}^{-1} &= \left(C^{-1} \right)_{ij}^i \mathbf{e}_i \otimes \mathbf{e}^j.
 \end{aligned} \tag{A.3}$$

Writing (A.2) in indicial form using (A.3) and using the definition (3.28)

$$\begin{aligned}
S_{.j}^i &= \mu \left[\delta_{.i}^i - (C^{-1})_{.j}^i \right] + \Lambda \ln J (C^{-1})_{.j}^i \\
\Rightarrow 2 \frac{\partial S_{.j}^i}{\partial C_{.b}^a} &= 2\mu \left[0 - \frac{\partial (C^{-1})_{.j}^i}{\partial C_{.b}^a} \right] + 2\Lambda \frac{\partial (\ln J (C^{-1})_{.j}^i)}{\partial C_{.b}^a} \\
&= 2\mu \left[0 - \frac{\partial (C^{-1})_{.j}^i}{\partial C_{.b}^a} \right] + 2\Lambda (C^{-1})_{.j}^i \mathbf{e}_i \otimes \mathbf{e}^j \otimes \frac{\partial (\ln J)}{\partial C_{.b}^a} + 2\Lambda \ln J \frac{\partial (C^{-1})_{.j}^i}{\partial C_{.b}^a} \\
&= 2(-\mu + \Lambda \ln J) \frac{\partial (C^{-1})_{.j}^i}{\partial C_{.b}^a} + 2\Lambda (C^{-1})_{.j}^i \mathbf{e}_i \otimes \mathbf{e}^j \otimes \left[\frac{1}{J} \frac{\partial J}{\partial C_{.b}^a} \right] \\
\Rightarrow \mathbb{C}_{.j.b}^{i.a} &= 2(-\mu + \Lambda \ln J) (C^{-1})_{.a}^i (C^{-1})_{.j}^b + \Lambda (C^{-1})_{.j}^i (C^{-1})_{.b}^a \\
&\quad (A.4)
\end{aligned}$$

A.3 Derivation of Compliance Matrix in Current Configuration

Given the expression of the compliance matrix in reference configuration

$$\mathbb{C} = 2(-\mu + \Lambda \ln J) (C^{-1})_{.a}^i (C^{-1})_{.j}^b \mathbf{e}_i \otimes \mathbf{e}^a \otimes \mathbf{e}_b \otimes \mathbf{e}^j + \Lambda (C^{-1})_{.j}^i (C^{-1})_{.b}^a \mathbf{e}_i \otimes \mathbf{e}^j \otimes \mathbf{e}_a \otimes \mathbf{e}^b. \quad (A.5)$$

and using the push-forward transformation to transform (A.5) to the current configuration

$$\begin{aligned}
\mathbb{c} &= 2(-\mu + \Lambda \ln J) (C^{-1})_{.a}^i (C^{-1})_{.j}^b (F \mathbf{e}_i \otimes \mathbf{e}^a F^T) \otimes (F \mathbf{e}_b \otimes \mathbf{e}^j F^T) \\
&\quad + \Lambda (C^{-1})_{.j}^i (C^{-1})_{.b}^a (F \mathbf{e}_i \otimes \mathbf{e}^j F^T) \otimes (F \mathbf{e}_a \otimes \mathbf{e}^b F^T) \\
&:= \mathbb{II} + \mathbb{III} \quad (A.6)
\end{aligned}$$

Operating on $\mathbb{II}$

$$\begin{aligned}
\mathbb{II} &= 2(-\mu + \Lambda \ln J) (C^{-1})_{.a}^i (C^{-1})_{.j}^b \\
&\quad [F_{.q}^p \mathbf{e}_p (\mathbf{e}^q \cdot \mathbf{e}_i)] \otimes [(\mathbf{e}^a \cdot \mathbf{e}_r) \mathbf{e}^s (F^T)_{.s}^r] [F_{.u}^t \mathbf{e}_t (\mathbf{e}^u \cdot \mathbf{e}_b)] \otimes [(\mathbf{e}^j \cdot \mathbf{e}_v) \mathbf{e}^w (F^T)_{.w}^v] \\
&= 2(-\mu + \Lambda \ln J) (F^{-1} F^{-T})_{.a}^i (F^{-1} F^{-T})_{.j}^b [F_{.q}^p \delta_{.i}^q \delta_{.r}^a (F^T)_{.s}^r F_{.u}^t \delta_{.b}^u \delta_{.v}^j (F^T)_{.w}^v] \mathbf{e}_p \otimes \mathbf{e}^s \otimes \mathbf{e}_t \otimes \mathbf{e}^w \\
\mathbb{II}_{.w.t}^{p.s} &= 2(-\mu + \Lambda \ln J) (F^{-1})_{.c}^i (F^{-T})_{.a}^c (F^{-1})_{.d}^b (F^{-T})_{.j}^d [F_{.i}^p \delta_{.r}^a (F^T)_{.s}^r F_{.b}^t \delta_{.v}^j (F^T)_{.w}^v] \\
&= 2(-\mu + \Lambda \ln J) [F_{.i}^p (F^{-1})_{.c}^i F_{.b}^t (F^{-1})_{.d}^b] [(F^{-T})_{.a}^c \delta_{.r}^a (F^T)_{.s}^r] [(F^{-T})_{.j}^d \delta_{.v}^j (F^T)_{.w}^v] \\
&= 2(-\mu + \Lambda \ln J) \delta_{.c}^p \delta_{.d}^t (F^{-T})_{.c}^c (F^T)_{.r}^r (F^{-T})_{.d}^d (F^T)_{.v}^v \\
&= 2(-\mu + \Lambda \ln J) \delta_{.c}^p \delta_{.d}^t \delta_{.s}^c \delta_{.w}^d \\
\Rightarrow \mathbb{II} &= 2(-\mu + \Lambda \ln J) \delta_{.s}^p \delta_{.w}^t \mathbf{e}_p \otimes \mathbf{e}^s \otimes \mathbf{e}_t \otimes \mathbf{e}^w \quad (A.7)
\end{aligned}$$

Similarly for $\mathbb{III}$

$$\begin{aligned}
\mathbb{III} &= \frac{\Lambda}{2} \left(C^{-1} \right)^i_{.j} \left(C^{-1} \right)^a_{.b} \left[F_{.q}^p \mathbf{e}_p (\mathbf{e}^q \cdot \mathbf{e}_i) \right] \otimes \left[(\mathbf{e}^j \cdot \mathbf{e}_v) \mathbf{e}^w \left(F^T \right)^v_{.w} \right] \\
&\quad \otimes \left[F_{.s}^r \mathbf{e}_r (\mathbf{e}^s \cdot \mathbf{e}_a) \right] \otimes \left[(\mathbf{e}^b \cdot \mathbf{e}_t) \mathbf{e}^u \left(F^T \right)^t_{.u} \right] \\
&= \frac{\Lambda}{2} \left(C^{-1} \right)^i_{.j} \left(C^{-1} \right)^a_{.b} \left[F_{.q}^p \delta_{.i}^q \delta_{.v}^j \left(F^T \right)^v_{.w} F_{.s}^r \delta_{.a}^s \delta_{.t}^b \left(F^T \right)^t_{.u} \right] \mathbf{e}_p \otimes \mathbf{e}^w \otimes \mathbf{e}_r \otimes \mathbf{e}^u \\
\mathbb{III}_{.w.u}^{p.r.} &= \frac{\Lambda}{2} \left(F^{-1} F^{-T} \right)^i_{.j} \left(F^{-1} F^{-T} \right)^a_{.b} \left[F_{.i}^p \delta_{.v}^j \left(F^T \right)^v_{.w} F_{.a}^r \delta_{.t}^b \left(F^T \right)^t_{.u} \right] \\
&= \frac{\Lambda}{2} \left(F^{-1} \right)^i_{.c} \left(F^{-T} \right)^c_{.j} \left(F^{-1} \right)^a_{.d} \left(F^{-T} \right)^d_{.b} \left[F_{.i}^p \delta_{.v}^j \left(F^T \right)^v_{.w} F_{.a}^r \delta_{.t}^b \left(F^T \right)^t_{.u} \right] \\
&= \frac{\Lambda}{2} \left(F_{.i}^p \left(F^{-1} \right)^i_{.c} \right) \left(F_{.a}^r \left(F^{-1} \right)^a_{.d} \right) \left[\left(F^{-T} \right)^c_{.j} \delta_{.v}^j \left(F^T \right)^v_{.w} \right] \left[\left(F^{-T} \right)^d_{.b} \delta_{.t}^b \left(F^T \right)^t_{.u} \right] \\
&= \frac{\Lambda}{2} \delta_{.c}^p \delta_{.d}^r \left[\left(F^{-T} \right)^c_{.v} \left(F^T \right)^v_{.w} \right] \left[\left(F^{-T} \right)^d_{.t} \left(F^T \right)^t_{.u} \right] \\
&= \frac{\Lambda}{2} \delta_{.c}^p \delta_{.d}^r \delta_{.w}^c \delta_{.u}^d \mathbf{e}_p \otimes \mathbf{e}^w \otimes \mathbf{e}_r \otimes \mathbf{e}^u \\
&= \frac{\Lambda}{2} \underbrace{\delta_{.w}^p \delta_{.u}^r \mathbf{e}_p \otimes \mathbf{e}^w \otimes \mathbf{e}_r \otimes \mathbf{e}^u}_{r \rightarrow s, u \rightarrow t} \\
\Rightarrow \mathbb{III} &= \frac{\Lambda}{2} \delta_{.w}^p \delta_{.t}^s \mathbf{e}_p \otimes \mathbf{e}^w \otimes \mathbf{e}_s \otimes \mathbf{e}^t
\end{aligned} \tag{A.8}$$

Using (A.7) and (A.8), the compliance matrix in the current configuration in indicial form is

$$\mathbb{C}_{.w.t}^{p.s.} = 2(-\mu + \Lambda \ln J) \delta_{.s}^p \delta_{.w}^t + \frac{\Lambda}{2} \delta_{.w}^p \delta_{.t}^s. \tag{A.9}$$

B Shell Formulations

B.1 Curvilinear Coordinates

B.1.1 Proof: $\mathbf{a}_{\alpha;\beta} = (\mathbf{n} \otimes \mathbf{n}) \mathbf{a}_{\alpha,\beta}$

Using (4.12)

$$(\mathbf{n} \otimes \mathbf{n}) = \tilde{\mathbf{1}} - \mathbf{1}, \quad (\text{B.1})$$

it can be written

$$\begin{aligned} (\mathbf{n} \otimes \mathbf{n}) \mathbf{a}_{\alpha,\beta} &= (\tilde{\mathbf{1}} - \mathbf{1}) \mathbf{a}_{\alpha,\beta} \\ &= \tilde{\mathbf{1}} \mathbf{a}_{\alpha,\beta} - (\mathbf{a}_\gamma \otimes \mathbf{a}^\gamma) \mathbf{a}_{\alpha,\beta} \\ &= \mathbf{a}_{\alpha,\beta} - (\mathbf{a}_{\alpha,\beta} \cdot \mathbf{a}^\gamma) \mathbf{a}_\gamma \\ &= \mathbf{a}_{\alpha,\beta} - \Gamma_{\alpha\beta}^\gamma \mathbf{a}_\gamma \\ &= \mathbf{n} \cdot \mathbf{a}_{\alpha;\beta} \end{aligned} \quad (\text{B.2})$$

B.1.2 Computation of Components of $b_{\alpha\beta}$

Using the results from the previous section of the Appendix,

$$\begin{aligned} \mathbf{n} \cdot \mathbf{a}_{\alpha;\beta} &= \mathbf{n} \cdot (\mathbf{n} \otimes \mathbf{n}) \mathbf{a}_{\alpha,\beta} \\ &= (\mathbf{n} \cdot \mathbf{n}) (\mathbf{a}_{\alpha,\beta} \cdot \mathbf{n}) \\ &= \mathbf{1} (\mathbf{a}_{\alpha,\beta} \cdot \mathbf{n}) =: b_{\alpha\beta} \end{aligned} \quad (\text{B.3})$$

B.2 Weak Form Derivation

$$\int_S \mathbf{w} [\mathbf{t}_{;\alpha}^\alpha + \mathbf{f}] \, da = 0. \quad (\text{B.4})$$

Decomposing $\mathbf{w}$ into its surface and normal components

$$0 = \int_S [w_\gamma \mathbf{a}^\gamma + w \mathbf{n}] [\sigma_{;\alpha}^{\beta\alpha} \mathbf{a}_\beta + \sigma^{\beta\alpha} b_{\beta\alpha} \mathbf{n} + \mathbf{f}] \, da \quad (\text{B.5})$$

$$0 = \int_S w_\gamma \mathbf{a}^\gamma [\sigma_{;\alpha}^{\beta\alpha} \mathbf{a}_\beta + f^\alpha \mathbf{a}_\alpha] \, da + \int_S w \mathbf{n} [\sigma^{\beta\alpha} b_{\beta\alpha} \mathbf{n} + p \mathbf{n}] \, da \quad (\text{B.6})$$

$$\begin{aligned} 0 &= \int_S (w_\gamma \sigma_{;\alpha}^{\beta\alpha} \delta_\beta^\gamma + f^\alpha \delta_\alpha^\gamma) \, da + \int_S w [\sigma^{\beta\alpha} b_{\beta\alpha} + p] \, da \\ &= \int_S [w_\beta \sigma_{;\alpha}^{\beta\alpha} + f^\gamma] \, da + \int_S [w \sigma^{\beta\alpha} b_{\beta\alpha} + p] \, da \\ &= \int_S [w_\beta \sigma_{;\alpha}^{\beta\alpha} + f^\gamma] \, da + \int_S [w \sigma^{\beta\alpha} b_{\beta\alpha} + p] \, da \\ &= \int_S [w_\gamma \sigma_{;\alpha}^{\gamma\alpha} + w_\gamma f^\gamma] \, da + \int_S [w \sigma^{\beta\alpha} b_{\beta\alpha} + p] \, da \end{aligned} \quad (\text{B.7})$$

Using divergence theorem

$$\begin{aligned} \int_S w_\gamma \sigma^{\gamma\alpha}_{;\alpha} \mathbf{d}a &= \int_S (w_\gamma \sigma^{\gamma\alpha})_{;\alpha} \mathbf{d}a - \int_S w_{\gamma;\alpha} \sigma^{\gamma\alpha} \mathbf{d}a \\ &= \int_{\partial S} w_\gamma \sigma^{\gamma\alpha} m_\alpha \mathbf{d}s - \int_S w_{\gamma;\alpha} \sigma^{\gamma\alpha} \mathbf{d}a \end{aligned} \quad (\text{B.8})$$

using $\mathbf{t} = m_\alpha \mathbf{t}^\alpha = m_\alpha \sigma^{\beta\alpha} \mathbf{a}_\beta$ it is possible to rewrite the surface integral of (B.8) as

$$\int_{\partial S} w_\gamma \sigma^{\gamma\alpha} m_\alpha \mathbf{d}s = \int_{\partial S} w_\gamma \bar{\mathbf{t}}^\gamma \mathbf{d}s \quad (\text{B.9})$$

the weak form can be written as,

$$0 = \int_{\partial S} w_\gamma \bar{\mathbf{t}}^\gamma \mathbf{d}s - \int_S w_{\gamma;\alpha} \sigma^{\gamma\alpha} \mathbf{d}a + \int_S w_\gamma f^\gamma \mathbf{d}a + \int_S w \sigma^{\beta\alpha} b_{\beta\alpha} \mathbf{d}a + \int_S w p \mathbf{d}s. \quad (\text{B.10})$$

B.3 Computation of $w_{\alpha;\beta}$

$$\begin{aligned} w_{\alpha;\beta} &= (\mathbf{w} \cdot \mathbf{a}_\alpha)_{;\beta} = \mathbf{w}_{;\beta} \cdot \mathbf{a}_\alpha + \mathbf{w} \cdot \mathbf{a}_{\alpha;\beta} \\ &= w_{;\beta} \mathbf{a}_\alpha + (w_\gamma \mathbf{a}^\gamma + w \mathbf{n}) \mathbf{a}_{\alpha;\beta} \\ &= \mathbf{w}_{;\beta} \cdot \mathbf{a}_\alpha + w_\gamma \mathbf{a}^\gamma \cdot \mathbf{a}_{\alpha;\beta} + w \mathbf{n} \cdot \mathbf{a}_{\alpha;\beta} \\ &= \mathbf{w}_{;\beta} \cdot \mathbf{a}_\alpha + w b_{\alpha\beta} \end{aligned} \quad (\text{B.11})$$

B.4 Discretisation of $w_{\alpha;\beta}$

Using the following results,

$$w_\alpha = \mathbf{w} \cdot \mathbf{a}_\alpha = (\mathbf{N} \mathbf{w}_e)^T \mathbf{a}_\alpha = \mathbf{w}_e^T \mathbf{N}^T \mathbf{a}_\alpha = \mathbf{w}_e^T \mathbf{N}^T (\mathbf{N}_{,\alpha} \mathbf{x}_e), \quad (\text{B.12})$$

$$w \approx \mathbf{w} \cdot \mathbf{n} = (\mathbf{N} \mathbf{w}_e)^T \mathbf{n} = \mathbf{w}_e^T \mathbf{N}^T \mathbf{n}, \quad (\text{B.13})$$

and

$$w_{;\alpha} \approx \mathbf{N}_{,\alpha} \mathbf{w}_e + \mathbf{N} \mathbf{w}_{e,\alpha} = \mathbf{N}_{,\alpha} \mathbf{w}_e, \quad (\text{B.14})$$

the following can be calculated

$$\begin{aligned} w_{\alpha;\beta} &= \mathbf{w}_{;\beta} \cdot \mathbf{a}_\alpha + w b_{\alpha\beta} \\ &\approx (\mathbf{N} \mathbf{w}_e)_{;\beta} \cdot \mathbf{a}_\alpha + w \mathbf{n} \cdot \mathbf{N}_{,\alpha\beta} \mathbf{x}_e \\ &= (\mathbf{N}_{,\beta} \mathbf{w}_e) \cdot \mathbf{a}_\alpha + w \mathbf{n} \cdot \mathbf{N}_{,\alpha\beta} \mathbf{x}_e \\ &= (\mathbf{N}_{,\beta} \mathbf{w}_e) \cdot (\mathbf{N}_{,\alpha} \mathbf{x}_e) + w \mathbf{n} \cdot \mathbf{N}_{,\alpha\beta} \mathbf{x}_e \\ &= \mathbf{w}_e^T \mathbf{N}_{,\beta}^T \mathbf{N}_{,\alpha} \mathbf{x}_e + (w \cdot \mathbf{n}) \cdot \mathbf{N}_{,\alpha\beta} \mathbf{x}_e \\ &= \mathbf{w}_e^T \mathbf{N}_{,\beta}^T \mathbf{N}_{,\alpha} \mathbf{x}_e + \mathbf{w}_e^T \mathbf{N}^T \mathbf{n} (\mathbf{N}_{,\alpha\beta} \cdot \mathbf{n}) \mathbf{x}_e \\ &= \mathbf{w}_e^T \left[\mathbf{N}_{,\beta}^T \mathbf{N}_{,\alpha} + \mathbf{N}^T (\mathbf{n} \otimes \mathbf{n}) \mathbf{N}_{,\alpha\beta} \right] \mathbf{x}_e \end{aligned} \quad (\text{B.15})$$

B.5 Linearisation

B.5.1 Linearisation of a_α

$$\mathbf{a}_\alpha = \mathbf{N}_{,\alpha} \mathbf{x}_e \quad (\text{B.16})$$

According to the definition of the tangent vector (4.2), the linearisation of the undiscretised form is

Linearising the parametric definition of the surface

$$\mathbf{x} = \mathbf{x}(\xi^1, \xi^2), \quad (\text{B.17})$$

$$\implies \Delta \mathbf{x} = \frac{\partial \mathbf{x}}{\partial \xi^1} \Delta \xi^1 + \frac{\partial \mathbf{x}}{\partial \xi^2} \Delta \xi^2, \quad (\text{B.18})$$

and using the definition of the tangent vector (4.2)

$$\mathbf{a}_\alpha = \mathbf{x}_{,\alpha} = \frac{\partial}{\partial \xi^\alpha} \left(\mathbf{x}(\xi^1, \xi^2) \right), \quad (\text{B.19})$$

the linearisation of $\mathbf{a}_\alpha$ can be written as

$$\Delta \mathbf{a}_\alpha = \Delta(\mathbf{x}_{,\alpha}) = \frac{\partial}{\partial \xi^1} \left[\frac{\partial \mathbf{x}}{\partial \xi^\alpha} \right] \Delta \xi^1 + \frac{\partial}{\partial \xi^2} \left[\frac{\partial \mathbf{x}}{\partial \xi^\alpha} \right] \Delta \xi^2. \quad (\text{B.20})$$

Using the property that the differential operator commutes and (B.18)

$$\Delta \mathbf{a}_\alpha = \frac{\partial}{\partial \xi^\alpha} \left[\frac{\partial \mathbf{x}}{\partial \xi^1} \Delta \xi^1 + \frac{\partial \mathbf{x}}{\partial \xi^2} \Delta \xi^2 \right] = \frac{\partial}{\partial \xi^\alpha} \Delta \mathbf{x}. \quad (\text{B.21})$$

Substituting the discretised value of $\Delta \mathbf{x}$ in (B.21),

$$\Delta \mathbf{a}_\alpha \approx \frac{\partial}{\partial \xi^\alpha} [\mathbf{N} \Delta \mathbf{x}_e] = \mathbf{N}_{,\alpha} \Delta \mathbf{x}_e \quad (\text{B.22})$$

B.5.2 Linearisation of $a_{\alpha\beta}$

$$a_{\alpha\beta} = \mathbf{a}_\alpha \cdot \mathbf{a}_\beta \quad (\text{B.23})$$

Using (B.22)

$$\begin{aligned} \Delta a_{\alpha\beta} &= \Delta(\mathbf{a}_\alpha \cdot \mathbf{a}_\beta) = \Delta \mathbf{a}_\alpha \cdot \mathbf{a}_\beta + \mathbf{a}_\alpha \cdot \Delta \mathbf{a}_\beta = \mathbf{a}_\beta \cdot \Delta \mathbf{a}_\alpha + \mathbf{a}_\alpha \cdot \Delta \mathbf{a}_\beta \approx (\mathbf{a}_\beta \cdot \mathbf{N}_\alpha + \mathbf{a}_\alpha \cdot \mathbf{N}_\beta) \Delta \mathbf{x}_e \\ &= [(\mathbf{N}_{,\beta} \mathbf{x}_e) \cdot \mathbf{N}_{,\alpha}] \Delta \mathbf{x}_e + [(\mathbf{N}_\alpha \mathbf{x}_e) \cdot \mathbf{N}_\beta] \Delta \mathbf{x}_e = [\mathbf{x}_e^T \mathbf{N}_{,\beta}^T \mathbf{N}_\alpha + \mathbf{x}_e^T \mathbf{N}_{,\alpha}^T \mathbf{N}_\beta] \Delta \mathbf{x}_e \\ &= \mathbf{x}_e^T [\mathbf{N}_{,\beta}^T \mathbf{N}_{,\alpha} + \mathbf{N}_{,\alpha}^T \mathbf{N}_{,\beta}] \Delta \mathbf{x}_e \end{aligned} \quad (\text{B.24})$$

B.5.3 Linearisation of $\mathbf{J}$

Using the chain rule it can be written

$$\Delta J = \frac{\partial J}{\partial J_a} \frac{\partial J_a}{\partial a_{\gamma\delta}} \frac{\partial a_{\gamma\delta}}{\partial a_\alpha} \Delta a_\alpha. \quad (\text{B.25})$$

Using the definitions in (4.19)

$$\begin{aligned}
\Delta J &= \frac{1}{J_A} \frac{\partial \sqrt{\det a_{\gamma\delta}}}{\partial a_{\gamma\delta}} \frac{\partial a_{\gamma\delta}}{\partial a_\alpha} \Delta a_\alpha \\
&= \left(\frac{1}{J_A} \right) \left(\frac{1}{2 \sqrt{\det a_{\gamma\delta}}} \frac{\partial (\det a_{\gamma\delta})}{\partial a_{\gamma\delta}} \right) \left(\frac{\partial a_{\gamma\delta}}{\partial a_\alpha} \right) \Delta a_\alpha \\
&= \left(\frac{1}{J_A} \right) \left(\frac{1}{2 J_a} J_a^2 a^{\gamma\delta} \right) \left(\frac{\partial a_{\gamma\delta}}{\partial a_\alpha} \right) \Delta a_\alpha \\
&= \frac{J_a}{2 J_A} a^{\gamma\delta} \frac{\partial (a_\gamma \cdot a_\delta)}{\partial a_\alpha} \Delta a_\alpha \\
&= \frac{J}{2} a^{\gamma\delta} [\delta_\gamma^\alpha a_\delta + a_\gamma \delta_\delta^\alpha] \Delta a_\alpha \\
&= \frac{J}{2} [a^{\alpha\delta} a_\delta + a^{\alpha\gamma} a_\gamma] \Delta a_\alpha \\
&= \frac{J}{2} (2 a^\alpha) \Delta a_\alpha \\
\implies \Delta J &= J a^\alpha \Delta a_\alpha
\end{aligned} \tag{B.26}$$

With the discretised definitions (B.26) is given as

$$\Delta J \approx J a^\alpha \cdot \mathbf{N}_{,\alpha} \Delta \mathbf{x}_e. \tag{B.27}$$

B.5.4 Linearisation of $a^{\alpha\beta}$

Using (4.5), the definition (4.4) can be rewritten as

$$a^{\alpha\beta} = \frac{1}{a} e^{\alpha\gamma} a_{\gamma\delta} e^{\delta\beta} \tag{B.28}$$

where a is the determinant of the metric tensor and $e^{\alpha\gamma}$ is the unit alternator. Thus, the linearisation of (B.28) is

$$\begin{aligned}
\Delta a^{\alpha\beta} &= \frac{\partial a^{\alpha\beta}}{\partial a_{\rho\phi}} \Delta a_{\rho\phi} = \frac{\partial [a^{-1} e^{\alpha\gamma} a_{\gamma\delta} e^{\delta\beta}]}{\partial a_{\rho\phi}} \Delta a_{\rho\phi} \\
&= \underbrace{\frac{\partial a^{-1}}{\partial a_{\rho\phi}} e^{\alpha\gamma} a_{\gamma\delta} e^{\delta\beta} \Delta a_{\rho\phi}}_I + \underbrace{\frac{1}{a} e^{\alpha\gamma} \frac{\partial a_{\gamma\delta}}{\partial a_{\rho\phi}} e^{\delta\beta} \Delta a_{\rho\phi}}_{II}.
\end{aligned} \tag{B.29}$$

Here

$$\begin{aligned}
I &= \frac{\partial a^{-1}}{\partial a_{\rho\phi}} e^{\alpha\gamma} a_{\gamma\delta} e^{\delta\beta} \Delta a_{\rho\phi} = (-1) a^{-2} a a^{\rho\phi} e^{\alpha\gamma} a_{\gamma\delta} e^{\delta\beta} \Delta a_{\rho\phi} \\
&= -\frac{1}{a} a^{\rho\phi} e^{\alpha\gamma} a_{\gamma\delta} e^{\delta\beta} \Delta a_{\rho\phi} = -a^{\rho\phi} \left[\frac{1}{a} e^{\alpha\gamma} a_{\gamma\delta} e^{\delta\beta} \right] [a_\rho \Delta a_\phi + a_\phi \Delta a_\rho] \\
&= -a^{\rho\phi} a^{\alpha\beta} [a_\rho \Delta a_\phi + a_\phi \Delta a_\rho] = \underbrace{-a^{\rho\phi} a^{\alpha\beta} a_\rho \Delta a_\phi}_{\rho \rightarrow \gamma, \phi \rightarrow \delta} - \underbrace{a^{\rho\phi} a^{\alpha\beta} a_\phi \Delta a_\rho}_{\rho \rightarrow \delta, \phi \rightarrow \gamma} \\
&= -a^{\gamma\delta} a^{\alpha\beta} a_\gamma \Delta a_\delta - a^{\delta\gamma} a^{\alpha\beta} a_\gamma \Delta a_\delta = -\left(a^{\gamma\delta} + a^{\delta\gamma} \right) a^{\alpha\beta} a_\gamma \Delta a_\delta \\
&= -2 a^{\gamma\delta} a^{\alpha\beta} a_\gamma \Delta a_\delta.
\end{aligned} \tag{B.30}$$

As the metric tensor is symmetric

$$\frac{\partial a_{\gamma\delta}}{\partial a_{\rho\phi}} = \frac{1}{2} \frac{\partial [a_{\gamma\delta} + a_{\delta\gamma}]}{\partial a_{\rho\phi}}, \quad (\text{B.31})$$

$$\begin{aligned} II &= \frac{1}{a} e^{\alpha\gamma} \frac{\partial a_{\gamma\delta}}{\partial a_{\rho\phi}} e^{\delta\beta} \Delta a_{\rho\phi} \\ &= \frac{1}{a} e^{\alpha\gamma} \left[\frac{1}{2} \frac{\partial (a_{\gamma\delta} + a_{\delta\gamma})}{\partial a_{\rho\phi}} \right] e^{\delta\beta} \Delta a_{\rho\phi} \\ &= \frac{1}{a} e^{\alpha\gamma} \frac{1}{2} \frac{\partial a_{\gamma\delta}}{\partial a_{\rho\phi}} e^{\delta\beta} \Delta a_{\rho\phi} + \frac{1}{a} e^{\alpha\gamma} \frac{1}{2} \frac{\partial a_{\delta\gamma}}{\partial a_{\rho\phi}} e^{\delta\beta} \Delta a_{\rho\phi} \\ &= \frac{1}{2a} e^{\alpha\gamma} \left[\delta_\gamma^\rho \delta_\delta^\phi \right] e^{\delta\beta} [a_\rho \Delta a_\phi + a_\phi \Delta a_\rho] + \frac{1}{2a} e^{\alpha\gamma} \left[\delta_\delta^\rho \delta_\gamma^\phi \right] e^{\delta\beta} [a_\rho \Delta a_\phi + a_\phi \Delta a_\rho] \\ &= \frac{1}{2a} e^{\alpha\gamma} e^{\delta\beta} [a_\rho \delta_\gamma^\rho \Delta a_\phi \delta_\delta^\phi + a_\phi \delta_\delta^\phi \Delta a_\rho \delta_\gamma^\rho] + \frac{1}{2a} e^{\alpha\gamma} e^{\delta\beta} [a_\rho \delta_\delta^\rho \Delta a_\phi \delta_\gamma^\phi + a_\phi \delta_\gamma^\phi \Delta a_\rho \delta_\delta^\rho] \\ &= \frac{1}{2a} e^{\alpha\gamma} e^{\delta\beta} [a_\gamma \Delta a_\delta + a_\delta \Delta a_\gamma] + \frac{1}{2a} e^{\alpha\gamma} e^{\delta\beta} [a_\delta \Delta a_\gamma + a_\gamma \Delta a_\delta] \\ &= \frac{1}{a} e^{\alpha\gamma} e^{\delta\beta} [a_\gamma \Delta a_\delta + a_\delta \Delta a_\gamma] = \frac{1}{a} e^{\alpha\gamma} e^{\delta\beta} [a_\gamma \Delta a_\delta + a_\delta \Delta a_\gamma] \\ &= \frac{1}{a} e^{\alpha\gamma} e^{\delta\beta} a_\gamma \Delta a_\delta + \frac{1}{a} e^{\alpha\gamma} e^{\delta\beta} a_\delta \Delta a_\gamma = \frac{1}{a} e^{\alpha\gamma} e^{\delta\beta} a_\gamma \Delta a_\delta + \frac{1}{a} e^{\alpha\delta} e^{\gamma\beta} a_\gamma \Delta a_\delta \\ &= \frac{1}{a} \left(e^{\alpha\gamma} e^{\delta\beta} + e^{\alpha\delta} e^{\gamma\beta} \right) a_\gamma \Delta a_\delta \end{aligned} \quad (\text{B.32})$$

Using (B.30), (B.32), and the appropriate discretisations, equation (B.29) can be written as

$$\Delta a^{\alpha\beta} = -2a^{\alpha\beta} a^{\gamma\delta} a_\gamma \Delta a_\delta + \frac{1}{a} \left(e^{\alpha\gamma} e^{\delta\beta} + e^{\alpha\delta} e^{\gamma\beta} \right) a_\gamma \Delta a_\delta = m^{\alpha\beta\gamma\delta} a_\gamma \Delta a_\delta \approx m^{\alpha\beta\gamma\delta} a_\gamma \mathbf{N}_{,\delta} \Delta \mathbf{x}_e \quad (\text{B.33})$$

where

$$m^{\alpha\beta\gamma\delta} = \frac{1}{a} \left(e^{\alpha\gamma} e^{\delta\beta} + e^{\alpha\delta} e^{\gamma\beta} \right) - 2a^{\alpha\beta} a^{\gamma\delta} \quad (\text{B.34})$$

B.5.5 Linearisation of $\tau^{\alpha\beta}$: Derivation of Compliance Matrix

- With the help of equations (4.37) and (4.38), the Kircchhof stress tensor can be written as

$$\begin{aligned} \tau^{\alpha\beta} &= 2 \frac{\partial W}{\partial a_{\alpha\beta}} = 2 \left[\frac{\Lambda}{4} \left(\frac{\partial J^2}{\partial a_{\alpha\beta}} - 2 \frac{\partial \ln J}{\partial a_{\alpha\beta}} \right) + \frac{\mu}{2} \left(\frac{\partial I_1}{\partial a_{\alpha\beta}} - 2 \frac{\partial \ln J}{\partial a_{\alpha\beta}} \right) \right] \\ &= \frac{\Lambda}{2} \left(\frac{\partial J^2}{\partial J} \frac{\partial J}{\partial a_{\alpha\beta}} - 2 \frac{\partial \ln J}{\partial J} \frac{\partial J}{\partial a_{\alpha\beta}} \right) + \mu \left(\frac{\partial I_1}{\partial a_{\alpha\beta}} - 2 \frac{\partial \ln J}{\partial J} \frac{\partial J}{\partial a_{\alpha\beta}} \right) \end{aligned} \quad (\text{B.35})$$

Computing the derivative of J as defined in (4.19) with respect to the metric tensor on the surface,

$$\begin{aligned}\frac{\partial J}{\partial a_{\alpha\beta}} &= \frac{1}{J_A} \frac{\partial J_a}{\partial (a_{\alpha\beta})} = \frac{1}{J_A} \frac{\partial (\sqrt{\det a_{\alpha\beta}})}{\partial (\det a_{\alpha\beta})} \frac{\partial (\det a_{\alpha\beta})}{\partial a_{\alpha\beta}} \\ &= \frac{1}{J_A} \frac{1}{2} (\det a_{\alpha\beta})^{-\frac{1}{2}} (\det a_{\alpha\beta}) (a_{\alpha\beta}^{-1})^T \\ &= \frac{1}{2J_A} J_a a^{\alpha\beta} = \frac{J}{2} a^{\alpha\beta}\end{aligned}\quad (\text{B.36})$$

and using (4.38) and (B.36), equation (B.35) can be written as

$$\begin{aligned}\tau^{\alpha\beta} &= \frac{\Lambda}{2} \left(2J \frac{J}{2} a^{\alpha\beta} - \frac{1}{J} \frac{J}{2} a^{\alpha\beta} \right) + \mu \left(A^{\alpha\beta} - 2 \frac{1}{J} \frac{J}{2} a^{\alpha\beta} \right) \\ &= \frac{\Lambda}{2} (J^2 - 1) a^{\alpha\beta} + \mu (A^{\alpha\beta} - a^{\alpha\beta}).\end{aligned}\quad (\text{B.37})$$

The compliance matrix in the current configuration is defined as

$$c^{\alpha\beta\gamma\delta} = \frac{\partial^2 W}{\partial a_{\alpha\beta} \partial a_{\gamma\delta}} = 2 \frac{\partial \tau^{\alpha\beta}}{\partial a_{\gamma\delta}} \quad (\text{B.38})$$

Equation (B.37) can be rewritten as

$$\tau^{\alpha\beta} = \frac{\Lambda}{2} (J^2 - 1) + \mu A^{\alpha\beta} - \mu a^{\alpha\beta} = \left(\frac{\Lambda}{2} (J^2 - 1) - \mu \right) a^{\alpha\beta} - \mu A^{\alpha\beta} \quad (\text{B.39})$$

With (B.39), equation (B.38) can be written as

$$\begin{aligned}c^{\alpha\beta\gamma\delta} &= \Delta \tau^{\alpha\beta} = 2 \left[\frac{\partial}{\partial a_{\gamma\delta}} \left(\frac{\Lambda}{2} (J^2 - 1) - \mu \right) a^{\alpha\beta} + \left(\frac{\Lambda}{2} (J^2 - 1) - \mu \right) \frac{\partial a^{\alpha\beta}}{\partial a_{\gamma\delta}} \right] \\ &= 2 \left[\frac{\Lambda}{2} \frac{\partial J^2}{\partial a_{\gamma\delta}} a^{\alpha\beta} + \left(\frac{\Lambda}{2} (J^2 - 1) - \mu \right) \frac{1}{2} m^{\alpha\beta\gamma\delta} \right] \\ &= \Lambda J^2 a^{\alpha\beta} a^{\gamma\delta} + \left(\frac{\Lambda}{2} (J^2 - 1) - \mu \right) m^{\alpha\beta\gamma\delta}\end{aligned}\quad (\text{B.40})$$

- For another Neo-Hookean material with the Cauchy stress tensor given as,

$$\sigma^{\alpha\beta} = \frac{\mu}{J} \left(A^{\alpha\beta} - \frac{a^{\alpha\beta}}{J^2} \right) \quad (\text{B.41})$$

and the definition of the Kircchhof stress tensor,

$$\tau = J \sigma \quad (\text{B.42})$$

the components of the tensor can be written as

$$\tau^{\alpha\beta} = \mu \left(A^{\alpha\beta} - a^{\alpha\beta} J^{-2} \right). \quad (\text{B.43})$$

Thus the linearisation of (B.43) using (B.38) is

$$\Delta \tau^{\alpha\beta} = \mu \Delta \left(A^{\alpha\beta} \right) - \mu \Delta \left(a^{\alpha\beta} J^{-2} \right) = \underbrace{\mu \Delta \left(A^{\alpha\beta} \right)}_{\substack{=0 \\ \text{as reference metric}}} - \frac{\mu}{J^2} \Delta a^{\alpha\beta} - \mu a^{\alpha\beta} \Delta \left(J^{-2} \right) \quad (\text{B.44})$$

$$\implies \Delta \tau^{\alpha\beta} = -\frac{\mu}{J^2} \Delta a^{\alpha\beta} - \mu a^{\alpha\beta} - \frac{2}{J^3} \Delta J. \quad (\text{B.45})$$

Using (B.27) and (B.33), it is possible to rewrite (B.45) as

$$\begin{aligned} \Delta \tau^{\alpha\beta} &\approx -\frac{\mu}{J^2} m^{\alpha\beta\gamma\delta} \mathbf{a}_\gamma \mathbf{N}_{,\delta} \Delta \mathbf{x}_e + \frac{2}{J^3} \mu a^{\alpha\beta} \left(J a^\delta \mathbf{N}_\delta \Delta \mathbf{x}_e \right) \\ &= -\frac{\mu}{J^2} \left[2a^{\alpha\beta} a^{\delta\gamma} \mathbf{a}_\gamma \mathbf{N}_{,\delta} \Delta \mathbf{x}_e - m^{\alpha\beta\gamma\delta} \mathbf{a}_\gamma \mathbf{N}_{,\delta} \Delta \mathbf{x}_e \right] \\ &= \frac{\mu}{J^2} \left[2a^{\alpha\beta} a^{\delta\gamma} - m^{\alpha\beta\gamma\delta} \right] \mathbf{a}_\gamma \mathbf{N}_{,\delta} \Delta \mathbf{x}_e \\ c^{\alpha\beta\gamma\delta} &= \frac{\mu}{J^2} \left[4a^{\alpha\beta} a^{\delta\gamma} - \frac{1}{a} \left(a^{\alpha\gamma} e^{\delta\beta} + e^{\alpha\delta} e^{\gamma\beta} \right) \right] \mathbf{a}_\gamma \cdot \mathbf{N}_{,\delta} \Delta \mathbf{x}_e \end{aligned} \quad (\text{B.46})$$

B.5.6 Linearisation of $\mathbf{f}_{\text{int}}^e$

Given the internal force vector for an element

$$\mathbf{f}_{\text{int}}^e = \int_{\Omega^e} \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA \mathbf{x}_e, \quad (\text{B.47})$$

the linearisation of (B.47) with respect to $\mathbf{x}$ can be derived as follows

$$\begin{aligned} \Delta \mathbf{f}_{\text{int}}^e &= \int_{\Omega^e} \Delta \left[\mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} \mathbf{x}_e \right] dA \\ &= \int_{\Omega^e} \mathbf{N}_{,\alpha}^T \Delta \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA \mathbf{x}_e + \int_{\Omega^e} \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA \Delta \mathbf{x}_e \\ &= \int_{\Omega^e} \mathbf{N}_{,\alpha}^T c^{\alpha\beta\gamma\delta} \mathbf{a}_\gamma \cdot \mathbf{N}_\delta \Delta \mathbf{x}_e \mathbf{N}_{,\beta} dA \mathbf{x}_e + \int_{\Omega^e} \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA \Delta \mathbf{x}_e \\ &= \int_{\Omega^e} \mathbf{N}_{,\alpha}^T c^{\alpha\beta\gamma\delta} (\mathbf{a}_\gamma \cdot \mathbf{N}_\delta) (\mathbf{N}_{,\beta} \mathbf{x}_e) dA \Delta \mathbf{x}_e + \int_{\Omega^e} \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA \Delta \mathbf{x}_e \\ &= \int_{\Omega^e} c^{\alpha\beta\gamma\delta} \mathbf{N}_{,\alpha}^T (\mathbf{a}_\gamma \mathbf{N}_\delta) \mathbf{a}_\beta dA \Delta \mathbf{x}_e + \int_{\Omega^e} \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA \Delta \mathbf{x}_e \\ &= \int_{\Omega^e} c^{\alpha\beta\gamma\delta} \mathbf{N}_{,\alpha}^T (\mathbf{a}_\alpha \otimes \mathbf{a}_\gamma) \mathbf{N}_{,\delta} dA \Delta \mathbf{x}_e + \int_{\Omega^e} \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} dA \Delta \mathbf{x}_e \\ &= \int_{\Omega^e} \left[c^{\alpha\beta\gamma\delta} \mathbf{N}_{,\alpha}^T (\mathbf{a}_\beta \otimes \mathbf{a}_\gamma) \mathbf{N}_{,\delta} + \mathbf{N}_{,\alpha}^T \tau^{\alpha\beta} \mathbf{N}_{,\beta} \right] dA \Delta \mathbf{x}_e. \end{aligned} \quad (\text{B.48})$$

B.5.7 Linearisation of $\mathbf{f}_{\text{ext}}^e$

Given the reduced external force vector based for dead loading

$$\mathbf{f}_{\text{ext}}^e = \int_{\Omega^e} \mathbf{N}^T p \mathbf{n} da, \quad (\text{B.49})$$

the linearisation carried out with respect to $\mathbf{x}$ and p^1 can be written as follows

$$\begin{aligned}
\Delta \mathbf{f}_{\text{ext}}^e &= \int_{\Omega^e} \Delta \left[\mathbf{N}^T p \mathbf{n} \, da \right] \\
&= \int_{\Omega^e} \mathbf{N}^T \Delta(p) \mathbf{n} \, da + \int_{\Omega^e} \mathbf{N}^T p \Delta(\mathbf{n} \, da) \\
&= \int_{\Omega^e} \mathbf{N}^T \Delta(\rho \mathbf{g} \cdot \mathbf{x}) \mathbf{n} \, da + \int_{\Omega^e} \mathbf{N}^T p \Delta(\mathbf{n} \, da) \\
&= \int_{\Omega^e} \mathbf{N}^T \rho \left(\underbrace{\Delta \mathbf{g} \cdot \mathbf{x}}_{=0} + \mathbf{g} \cdot \Delta \mathbf{x}_e \right) \mathbf{n} \, da + \int_{\Omega^e} \mathbf{N}^T p \Delta(\mathbf{n} \, da) \\
&= \int_{\Omega^e} \rho \mathbf{N}^T (\mathbf{g} \cdot \Delta \mathbf{x}_e) \mathbf{n} \, da + \int_{\Omega^e} \mathbf{N}^T p \Delta(\mathbf{n} \, da) \\
&= \int_{\Omega^e} \rho \mathbf{N}^T (\mathbf{n} \otimes \mathbf{g}) \, da \Delta \mathbf{x}_e + \int_{\Omega^e} p \mathbf{N}^T (\mathbf{n} \otimes \mathbf{a}^\alpha - \mathbf{a}^\alpha \otimes \mathbf{n}) \mathbf{N}_{,\alpha} \, da \Delta \mathbf{x}_e
\end{aligned} \tag{B.50}$$

¹only in the case of hydrostatic loading

Bibliography

- [1] P. Arbenz. *Lecture Notes: Introduction to Finite Elements and Sparse Linear System Solving*. 2017.
- [2] M. Bischoff et al. “Models and Finite Elements for Thin-Walled Structures”. In: *Encyclopedia of Computational Mechanics*. John Wiley & Sons, Ltd, 2004. Chap. 3. ISBN: 9780470091357.
- [3] S. Brenner and L.R. Scott. *The Mathematical Theory of Finite Element Methods*. Texts in Applied Mathematics. Springer New York, 2002. ISBN: 9780387954516.
- [4] W.F. Chen. *Handbook of Structural Engineering*. CRC Press, 1997. ISBN: 9781439834350.
- [5] P.G. Ciarlet. *The Finite Element Method for Elliptic Problems*. ISSN. Elsevier Science, 1978. ISBN: 9780080875255.
- [6] W. Flügge. *Stresses in Shells*. Springer Berlin Heidelberg, 2013. ISBN: 9783642882913.
- [7] A.N. Gent and R.P. Campion. *Engineering with Rubber: How to Design Rubber Components*. Hanser, 2001. ISBN: 9781569902998.
- [8] M. Itskov. *Lecture Notes: Continuum Mechanics*. 2020.
- [9] A. Larcher and N. C. Deñgirmenci. *Lecture Notes: The Finite Element Method*. 2013.
- [10] M. Loibl. *Implementation and validation of an isogeometric hierarchic shell formulation (Dissertation)*. 2019.
- [11] R.D. Mindlin. “Influence of Rotatory Inertia and Shear on Flexural Motions of Isotropic, Elastic Plates”. In: *Journal of Applied Mechanics* 18.1 (1951), pp. 31–38.
- [12] P.M. Naghdi. “A New Derivation of the General Equations of Elastic Shells”. In: *International Journal of Engineering Science* 1.4 (1963). ISSN: 0020-7225.
- [13] Ali H. Nayfeh and P. Frank Pai. “Shells”. In: *Linear and Nonlinear Structural Mechanics*. John Wiley & Sons, Ltd, 2004. Chap. 9. ISBN: 9783527617562.
- [14] P. Podio-Guidugli. “An Exact Derivation of the Thin Plate Equation”. In: *Journal of Elasticity* 22.2 (1989), pp. 121–133.
- [15] E. Reissner. “A new derivation of the equations for the deformation of elastic shells”. In: *American Journal of Mathematics* 63.1 (1941), pp. 177–184.
- [16] R. A Sauer, T. X. Duong, and C. J. Corbett. “A Computational Formulation for Constrained Solid and Liquid Membranes Considering Isogeometric Finite Elements”. In: *Computer Methods in Applied Mechanics and Engineering* 271 (2014), pp. 48–68. ISSN: 0045-7825.
- [17] R.A. Sauer. *Lecture Notes: Nonlinear Finite Element Methods for Solids*. 2016.
- [18] D.J. Steigmann. “On the Relationship Between the Cosserat and Kirchhoff-Love Theories of Elastic Shells”. In: *Mathematics and Mechanics of Solids* 4.3 (1999), pp. 275–288.
- [19] E. Süli. *Lecture Notes on Finite Element Methods for Partial Differential Equations*. 2012.

- [20] C. Truesdell. *The Elements of Continuum Mechanics: Lectures given in August - September 1965 for the Department of Mechanical and Aerospace Engineering Syracuse University Syracuse, New York*. Springer Berlin Heidelberg, 2012. ISBN: 9783642649769.
- [21] C. Truesdell et al. *Mechanics of Solids: Volume II: Linear Theories of Elasticity and Thermoelasticity, Linear and Nonlinear Theories of Rods, Plates, and Shells*. Springer Berlin Heidelberg, 1984. ISBN: 9783540055358.
- [22] E. Ventsel and T. Krauthammer. *Thin Plates and Shells: Theory: Analysis, and Applications*. Taylor & Francis, 2001. ISBN: 9780824705756.
- [23] P. Wriggers. *Nonlinear Finite Element Methods*. Springer Berlin Heidelberg, 2008. ISBN: 9783540710011.