Engine Model(s): PT6A


74-00-00

IGNITION - DESCRIPTION AND OPERATION

1. Description and Operation (Ref. Figs. 1 and 2)

Printed on 10/NOV/26 P&WC Proprietary – subject to restrictions in Technical Data Agreement

Figure 1 Spark Ignition - Schematic

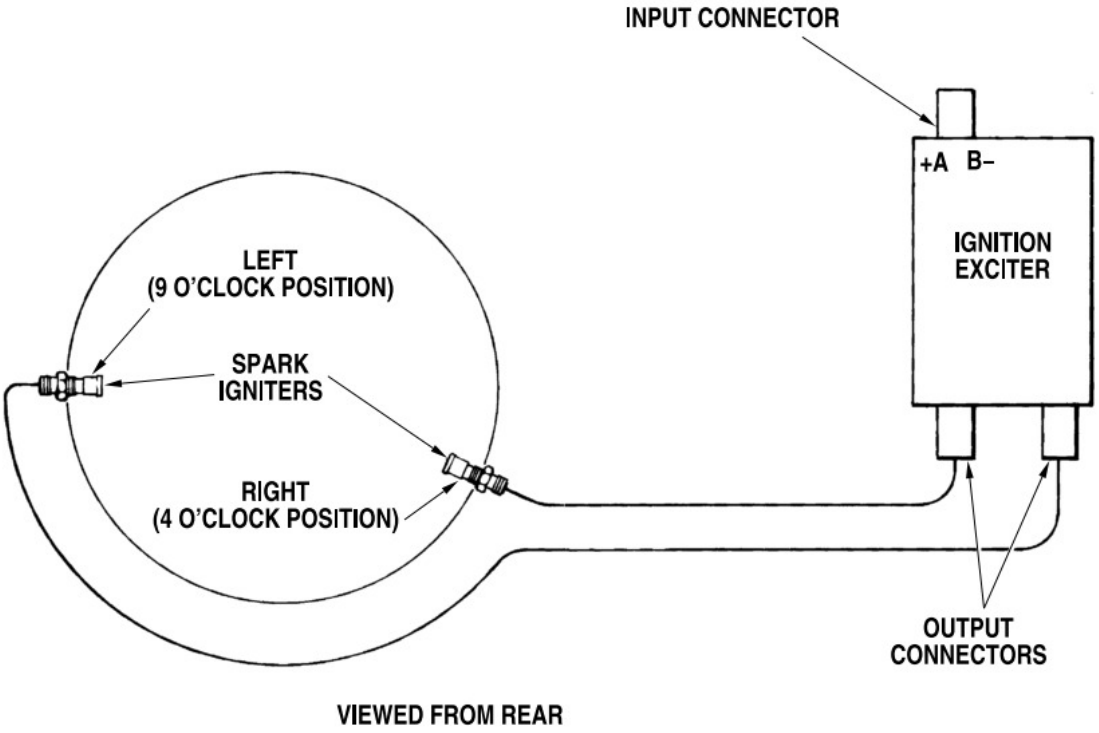

c1818a

Printed on 10/NOV/26 P&WC Proprietary – subject to restrictions in Technical Data Agreement


Two types of ignition systems are available, dependent on a specific application of an engine model to a related airframe. Each system, energized from the aircraft nominal 28-volt DC supply, provides the engine with fast light-ups at all ambient temperatures.

One application utilizes the spark ignition system (Ref. Fig. 1). This system consists of two spark igniters, two shielded cables and an ignition exciter which incorporates solid-state circuitry.

The second application utilizes the glow plug ignition system (Ref. Fig. 2). This system consists of two glow plugs, two shielded cables and an ignition current regulator which incorporates a selectable circuit of two sets of ballast tubes.

Printed on 10/NOV/26 P&WC Proprietary – subject to restrictions in Technical Data Agreement

Figure 2 Glow Plug Ignition - Schematic

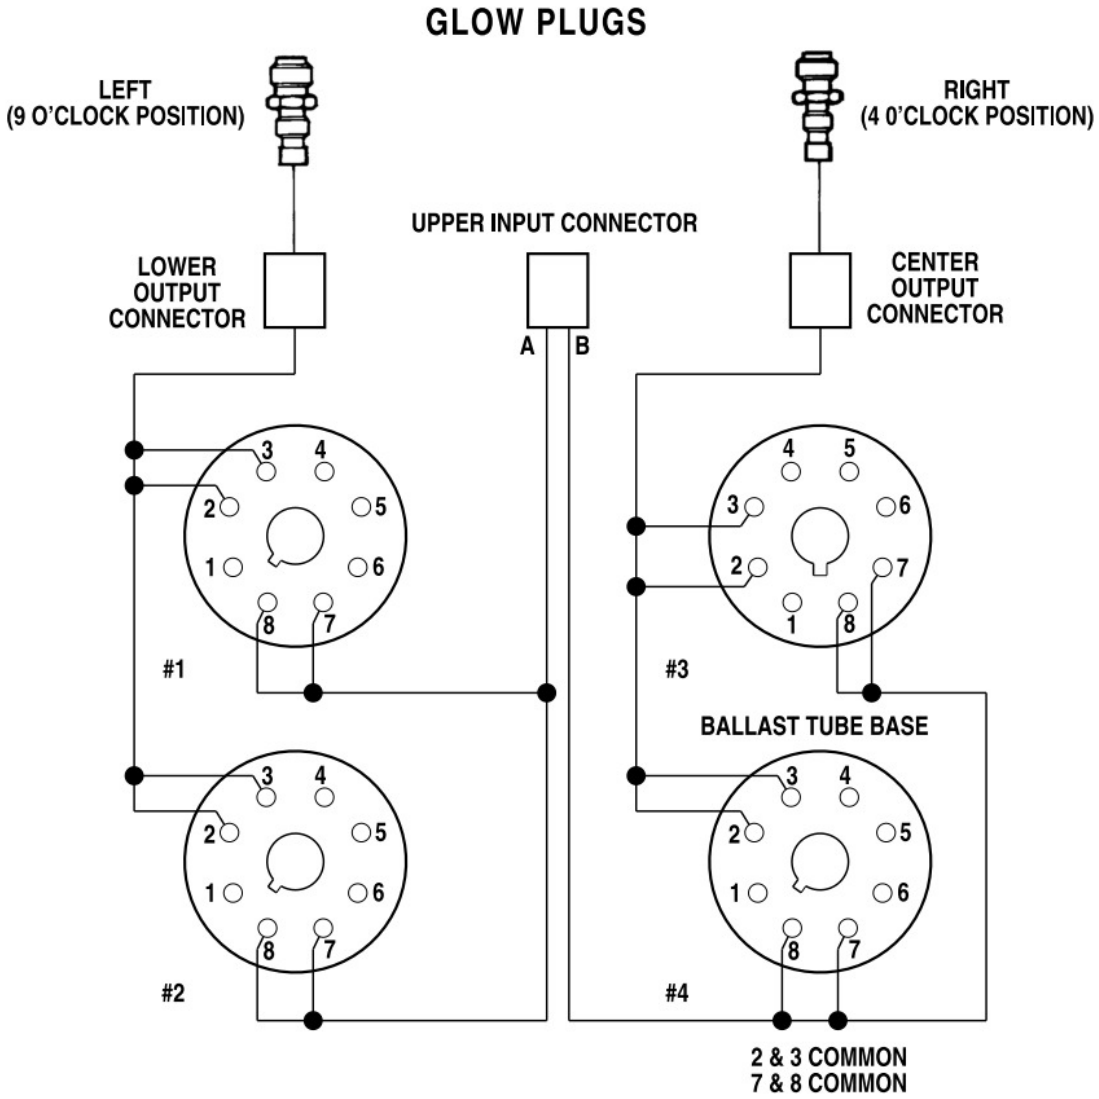

c448d

Printed on 10/NOV/26 P&WC Proprietary – subject to restrictions in Technical Data Agreement

2. Fault Isolation

For detailed procedures refer to Chapter 72-00-00, FAULT ISOLATION.

Printed on 10/NOV/26 P&WC Proprietary – subject to restrictions in Technical Data Agreement