# 1 Flash-Based SSDs

### Vocabularies

### 1. Flash Solid-State Storage

• Is a type of non-volatile computer storage that stores and retrieves digital information using only electronic circuits, without any involvement of moving mechanical parts

#### 2. NAND-Based Flash


• Is an electronic non-volatile computer memory storage medium using NAND-gate that can be electrically erased and reprogrammed.

### 3. Flash Page

• Is the smallest unit that can be programmed into flash

#### 4. Flash Block

• Is a group of pages and the smallest unit that can be erased.

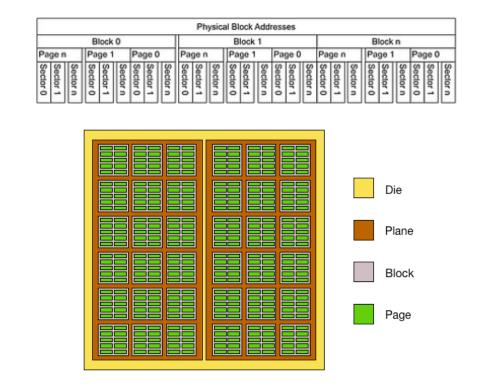

## 5. Wear Out

- Is similar to going past expiration date
- Means it has exceeded their endurance rating

### 6. Single-Level Cell

• Is a type of cell in solid-state storage that stores one bit of data per transister (0 or 1)

#### 7. Multi-Level Cell

• Is a type of cell in solid-state storage that stores two bits of data (i.e 00, 01, 10, 11) per cell using two different levels of charge

#### 8. Triple-Level Cell

• Is a type of cell in solid-state storage that stores three bits of data per cell (i.e 000, 001, 010, 011, 100, 101, 110, 111)

#### 9. Head Crash

• Is a condition where the drive head makes contact with the recording surface



#### 10. Disturbance

- Is also known as read disturbance or program disturbance
- Is a condition where accessing a bit in a page causes some bits to get flipped in neighboring pages

### 11. Flash Transition Layer

• Is an intermediate system made up software and hardware that manages SSD operations



## 12. Wear Leveling

• Is a technique for prolonging the service life of some kinds of erasable computer storage media, such as flash memory, which is used in solid-state drives (SSDs)

## 13. Direct Mapped


• Is a simplest organization of an **Flash Transition Layer** that maps read of logical page N directly to read of playsical page N.

### 14. Logging

• Is a concept in **log-structured file system** that buffer all writes (data + metadata) using an in-memory segment; once the segment is full, write the segment to a log

#### 15. Logical Block Address

• Is a common scheme used for specifying the location of blocks of data stored on computer storage devices, generally in secondary storage system

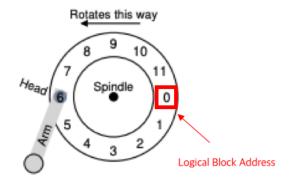

### 16. In-Memory Mapping Table

• Is a table inside the memory of the secondary storage device (is persistent in some form) that stores the physical address of each logical block in the system

#### 17. Garbage Block

- Is also called **Dead Block**
- Is old version of block in secondary storage, such as solid state drive

## 18. Garbage Collection


• Is the process of finding garbage blocks and reclaiming them for future use

#### 19. Cache Flush

• Is the process of clearing out sections of memory to ensure writes have actually been persisted in solid state drive

#### 20. **Trim**

• Is an operation that takes an address (and possibly a length) and informs the device that the block(s) specified by the address (and length) have been deleted

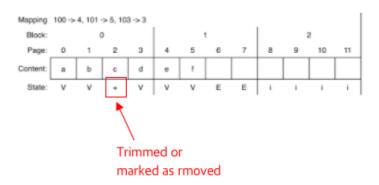

### 21. Overprovision

• Is an extra amount of flash space used to reduce the cost of **garbage collection**, increase the logitivity of flash drive, and prevents the device from slowing down



### 22. Page-Level FTL

- Is an intermediate system made of software and hardware that manages SSD operations at page-level.
  - It does not write a full block
  - Only writes the necessary page(s) of data along with the FTL metadata that must be written to track of the new position of the data

## 23. Hybrid Mapping

• Is a mapping technique used in **Flash Transition Layer** that utilizes both block-based mapping and page-based mapping to enable flexible writing but also reduce mapping costs

### 24. Log Blocks

 Are blocks in solid state storage where contents are erased and all writes are directed

### 25. Switch Merge

• This will be revisited when reading related section

## 26. Partial Merge

• This will be revisited when reading related section

### 27. Full Merge

• This will be revisited when reading related section

#### 1.1 Flash-Based SSDs

- Has two interesting problems to overcome
  - 1. To write a small chunk (called **flash page**), a bigger chunk (**flash block**) must be erased first
  - 2. Writing too often would cause a page to wear out

# 1.2 Storing a Single Bit

•

- 1.3 From Bits to Banks / Planes
- 1.4 Basic Flash Operations
- 1.5 From Raw Flash to Flash-Based SSDs
- 1.6 FTL Organization: A Bad Approach
- 1.7 A Log Structured FTL
- 1.8 Garbage Collection
- 1.9 Mapping Table Size
- 1.10 Hybrid Mapping
- 1.11 Wear Leveling
- 1.12 SSD Performance And Cost