

B.G.REICH®


ES 32-13


9 m³/hr @ 6 Mtr

0.5 HP 4P
50Hz 1450rpm

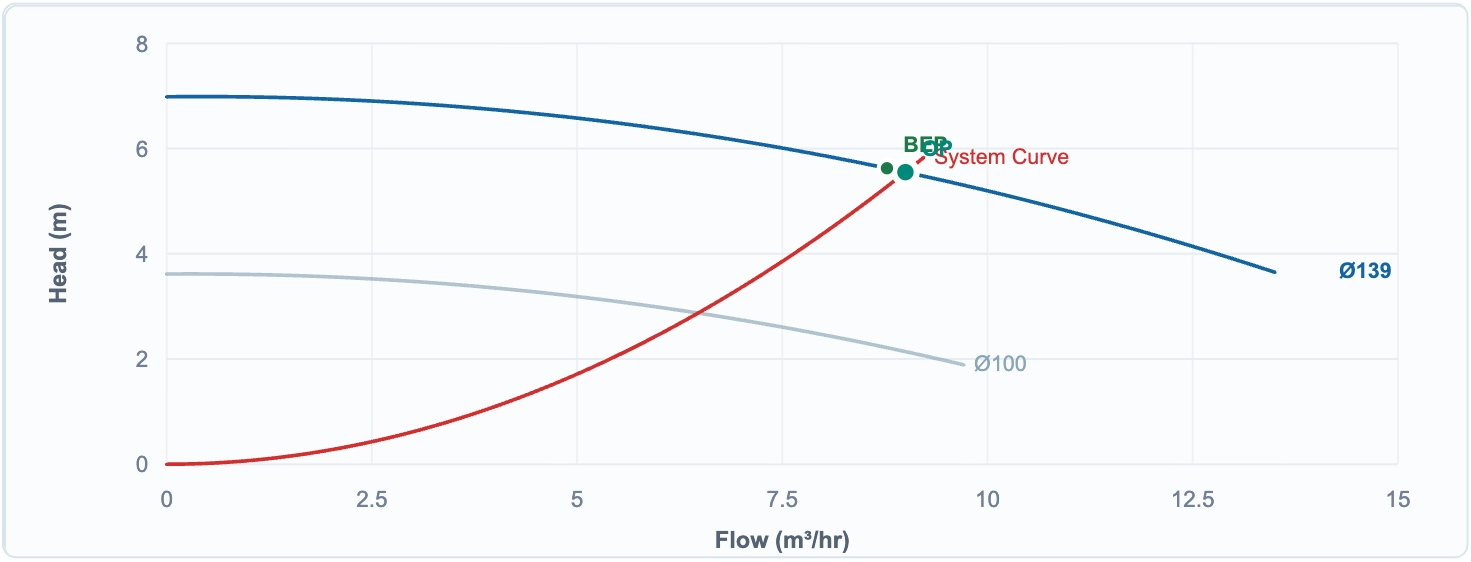

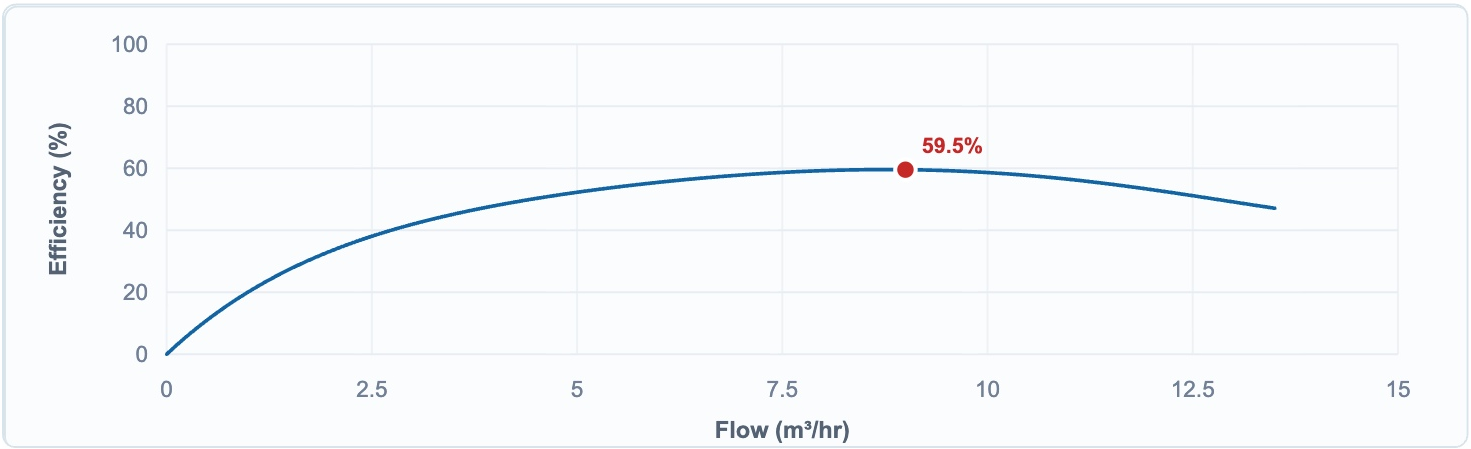

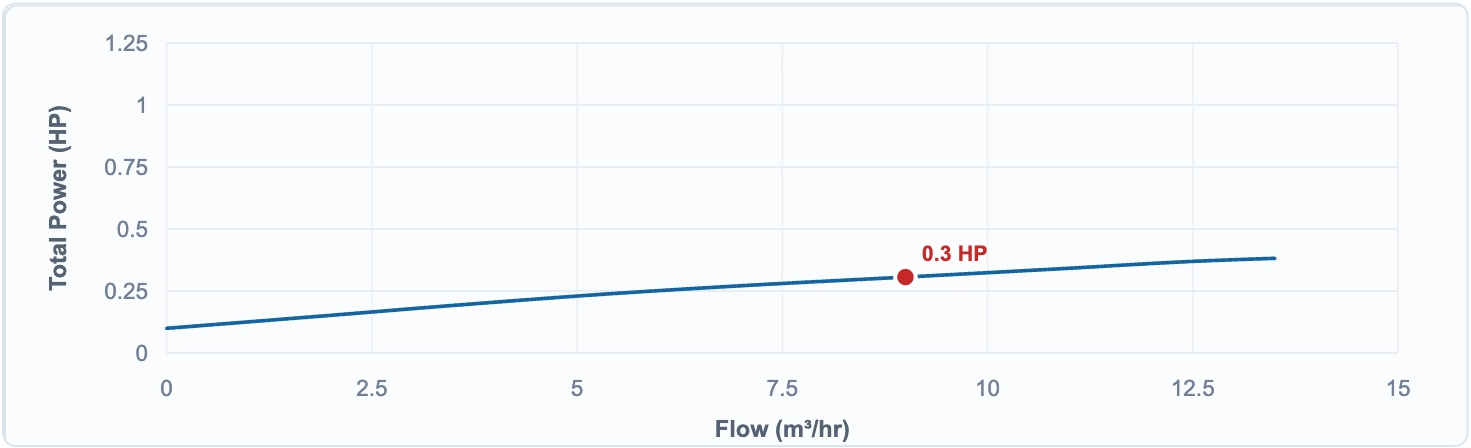

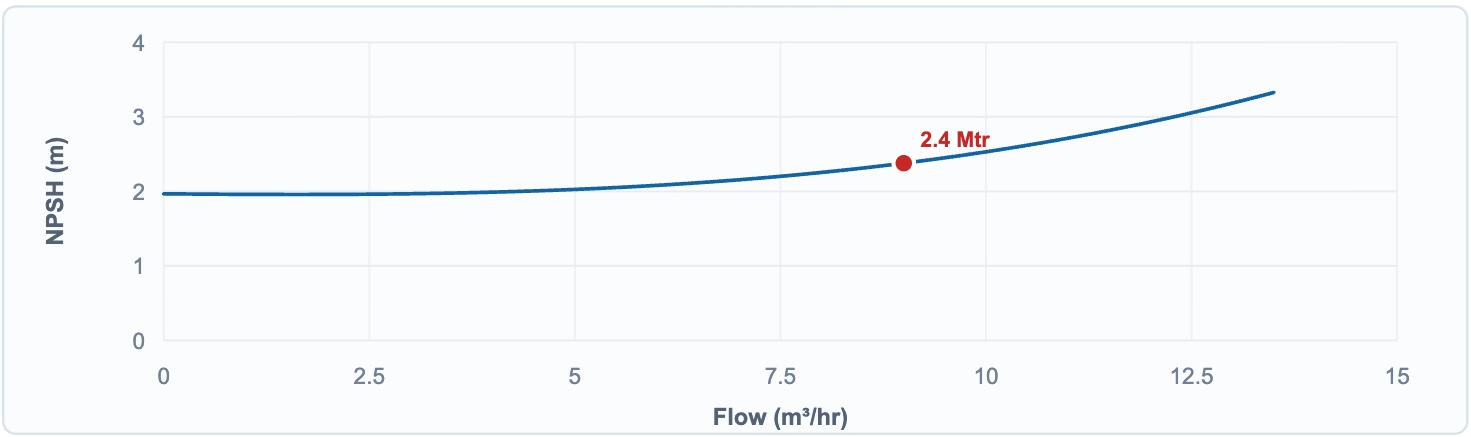

ISO 9906:Grade 3B

B.G.REICH®

Project:
-

TECHNICAL DATA

Operating Data			
Application	-		
Location	-	Capacity	9 m³/hr
Fluid	Water, Clean	Pressure	6 Mtr
Density	0.9983 kg/dm³	Temperature	20 °C
Kin. Viscosity	1.005 mm²/s		

Pump			
Brand	B.G.Reich	Country of Origin	Malaysia
Type	End Suction Pump	Country of Manufacture	China
Model	**ES 32-13**	Suction Size	DN50 PN16
Speed	1450 rpm	Discharge Size	DN32 PN16
Material: -		Efficiency	59.5 %
Casing	Cast Iron	Brake HP	0.3 HP
Impeller	Stainless Steel	Impeller Diameter	139 mm
Shaft	Stainless Steel	NPSHr	2.4 Mtr
Shaft Seal	Mechanical Seal	Max Casing Pressure	10 Bar
Bearing Type	Ball		

Motor			
Brand	B.G.Reich	Country of Origin	Malaysia
Type	TEFC	Country of Manufacture	China
Model	3BM0.5-4	Efficiency:	IE3
Rated Power	0.5 HP / 0.37 kW	100%	71.20 %
Speed	1360 rpm	75%	-
Rated FL Amp	1.05 Amp	Power Factor:-	
Frequency	50 Hz	100%	0.62
Rated Voltage	415 Volt	75%	-
Phase	3 Phase	Protection	IP 55
Insulation Class	Class F		

Pumpset			
Dimension: -		Weight	-
Length	-	Coupling Type	Flexible
Width	-		
Height	-		

* Approximate dimension & weight

B.G.Reich reserves the right to make modifications without notice.

Dimension

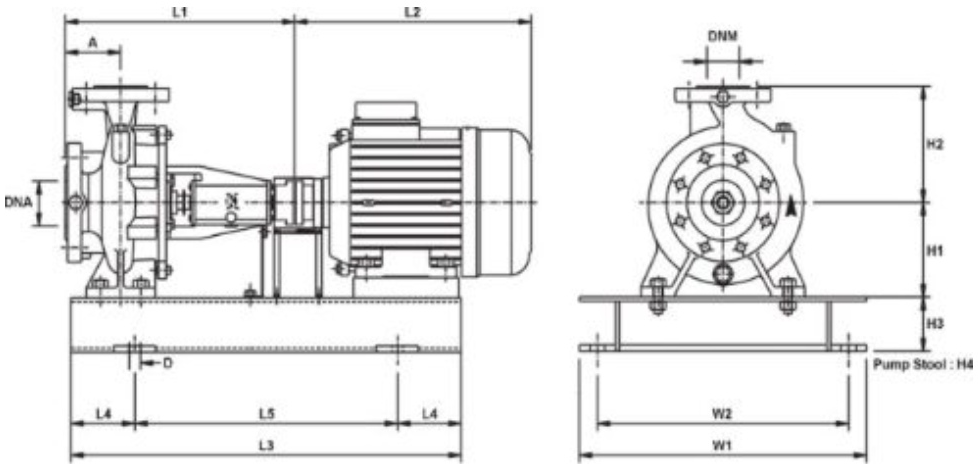


Table Dimensions

L1	-	DNA	-
L2	-	DNM	-
L3	-	A	-
L4	-	D	-
L5	-	Weight	-
W1	-		
W2	-		
H1	-		
H2	-		
H3	-		
H4	-		

* Approximate dimension & weight