

ROTTERDAM/Rotterdam
AERODROME CHART

TWR 118.205 Rotterdam Tower
119.705


122.180 Rotterdam Delivery

ATIS 128.565 Rotterdam Info

AD ELEV -14

VAR 2° E (2025)


ANNUAL RATE
OF CHANGE 10' E

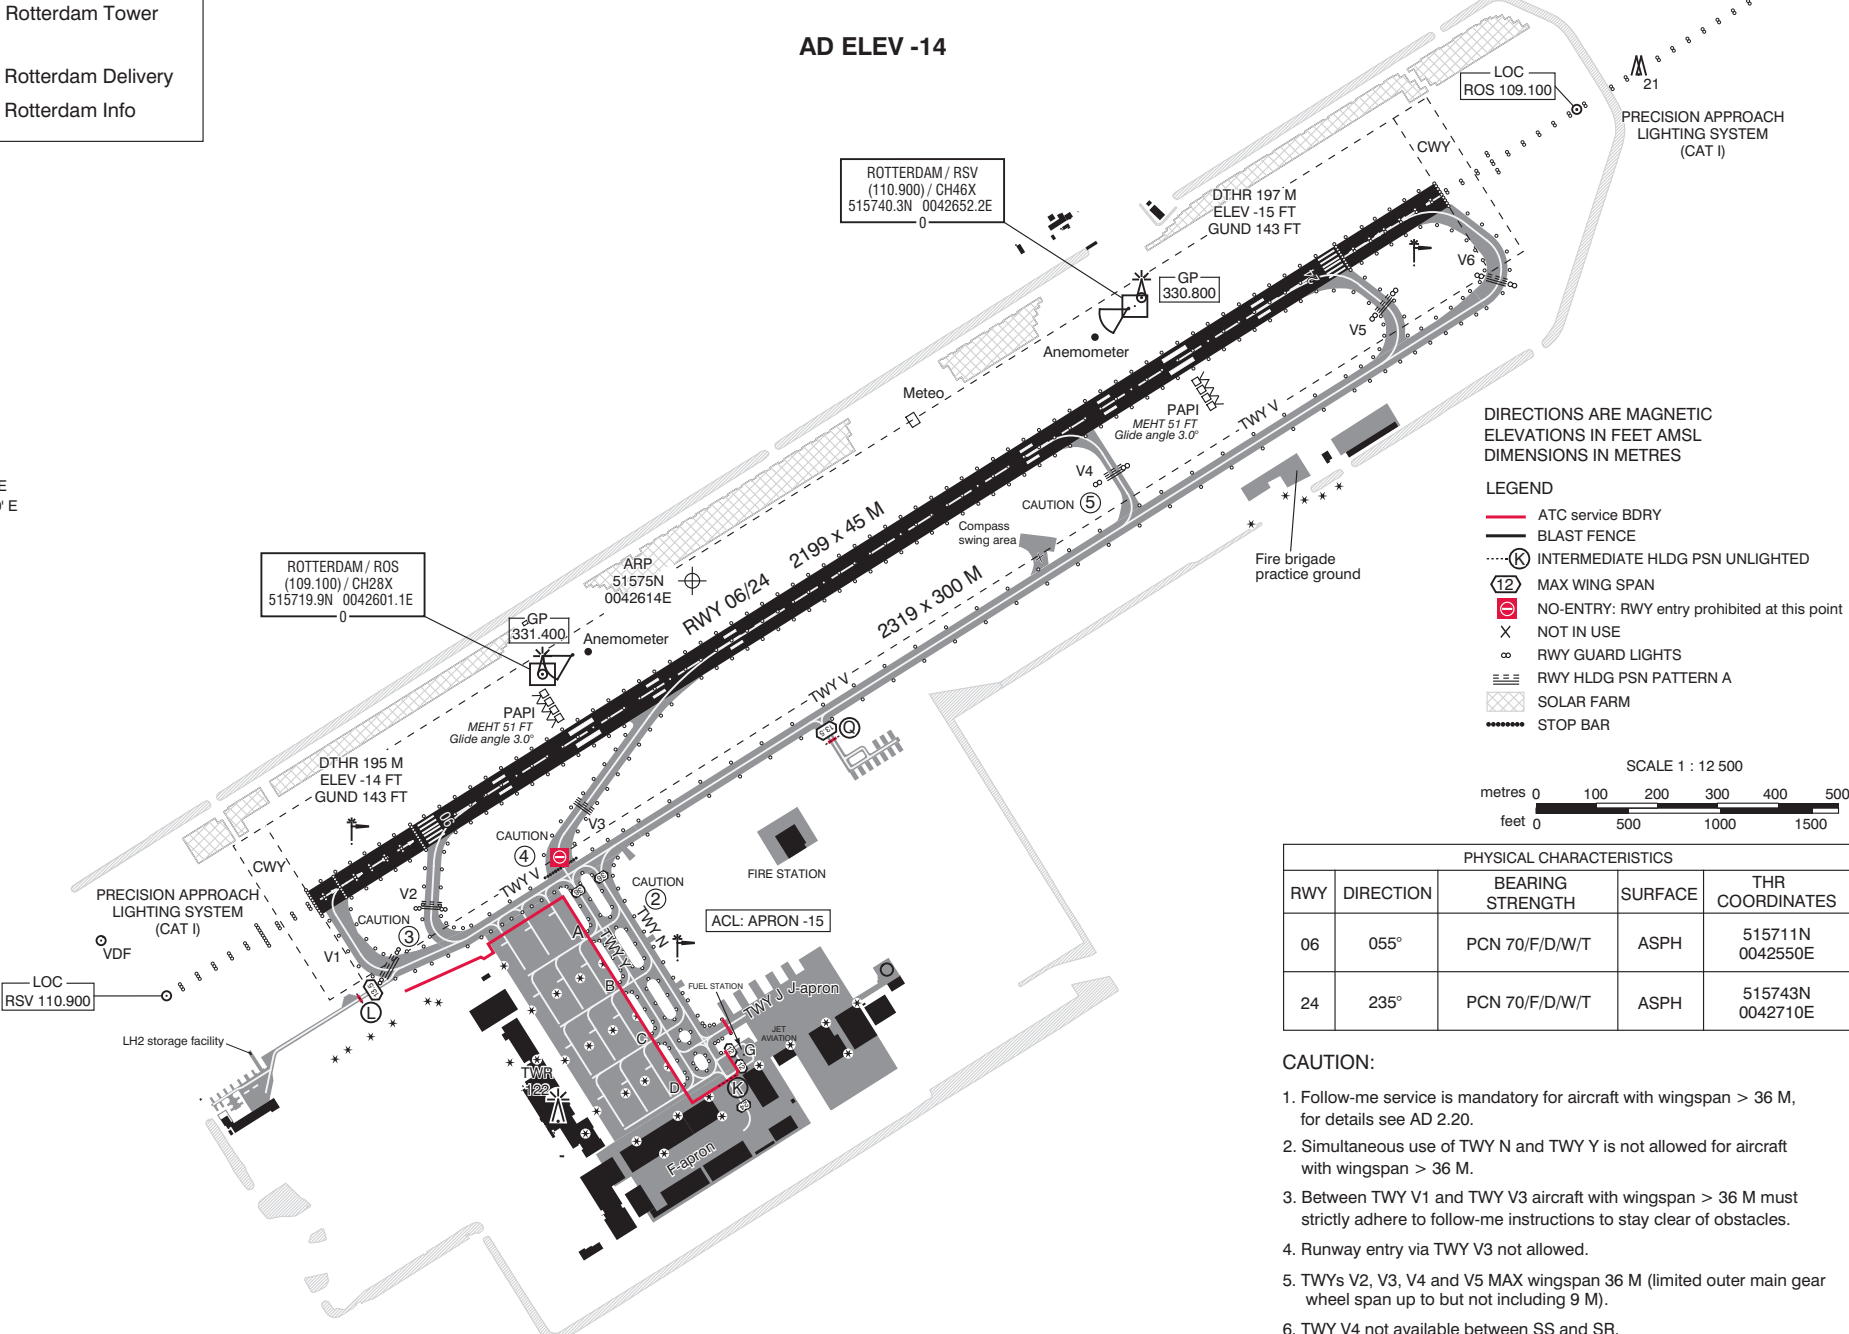

DIRECTIONS ARE MAGNETIC
ELEVATIONS IN FEET AMSL
DIMENSIONS IN METRES

LEGEND


- ATC service BDRY
- BLAST FENCE
- INTERMEDIATE HLDG PSN UNLIGHTED
- MAX WING SPAN
- NO-ENTRY: RWY entry prohibited at this point
- NOT IN USE
- RWY GUARD LIGHTS
- RWY HLDG PSN PATTERN A
- SOLAR FARM
- STOP BAR



PHYSICAL CHARACTERISTICS				
RWY	DIRECTION	BEARING STRENGTH	SURFACE	THR COORDINATES
06	055°	PCN 70/F/D/W/T	ASPH	515711N 0042550E
24	235°	PCN 70/F/D/W/T	ASPH	515743N 0042710E

- CAUTION:
- Follow-me service is mandatory for aircraft with wingspan > 36 M, for details see AD 2.20.
 - Simultaneous use of TWY N and TWY Y is not allowed for aircraft with wingspan > 36 M.
 - Between TWY V1 and TWY V3 aircraft with wingspan > 36 M must strictly adhere to follow-me instructions to stay clear of obstacles.
 - Runway entry via TWY V3 not allowed.
 - TWYs V2, V3, V4 and V5 MAX wingspan 36 M (limited outer main gear wheel span up to but not including 9 M).
 - TWY V4 not available between SS and SR.

ROTTERDAM/Rotterdam
AIRCRAFT PARKING / DOCKING CHART

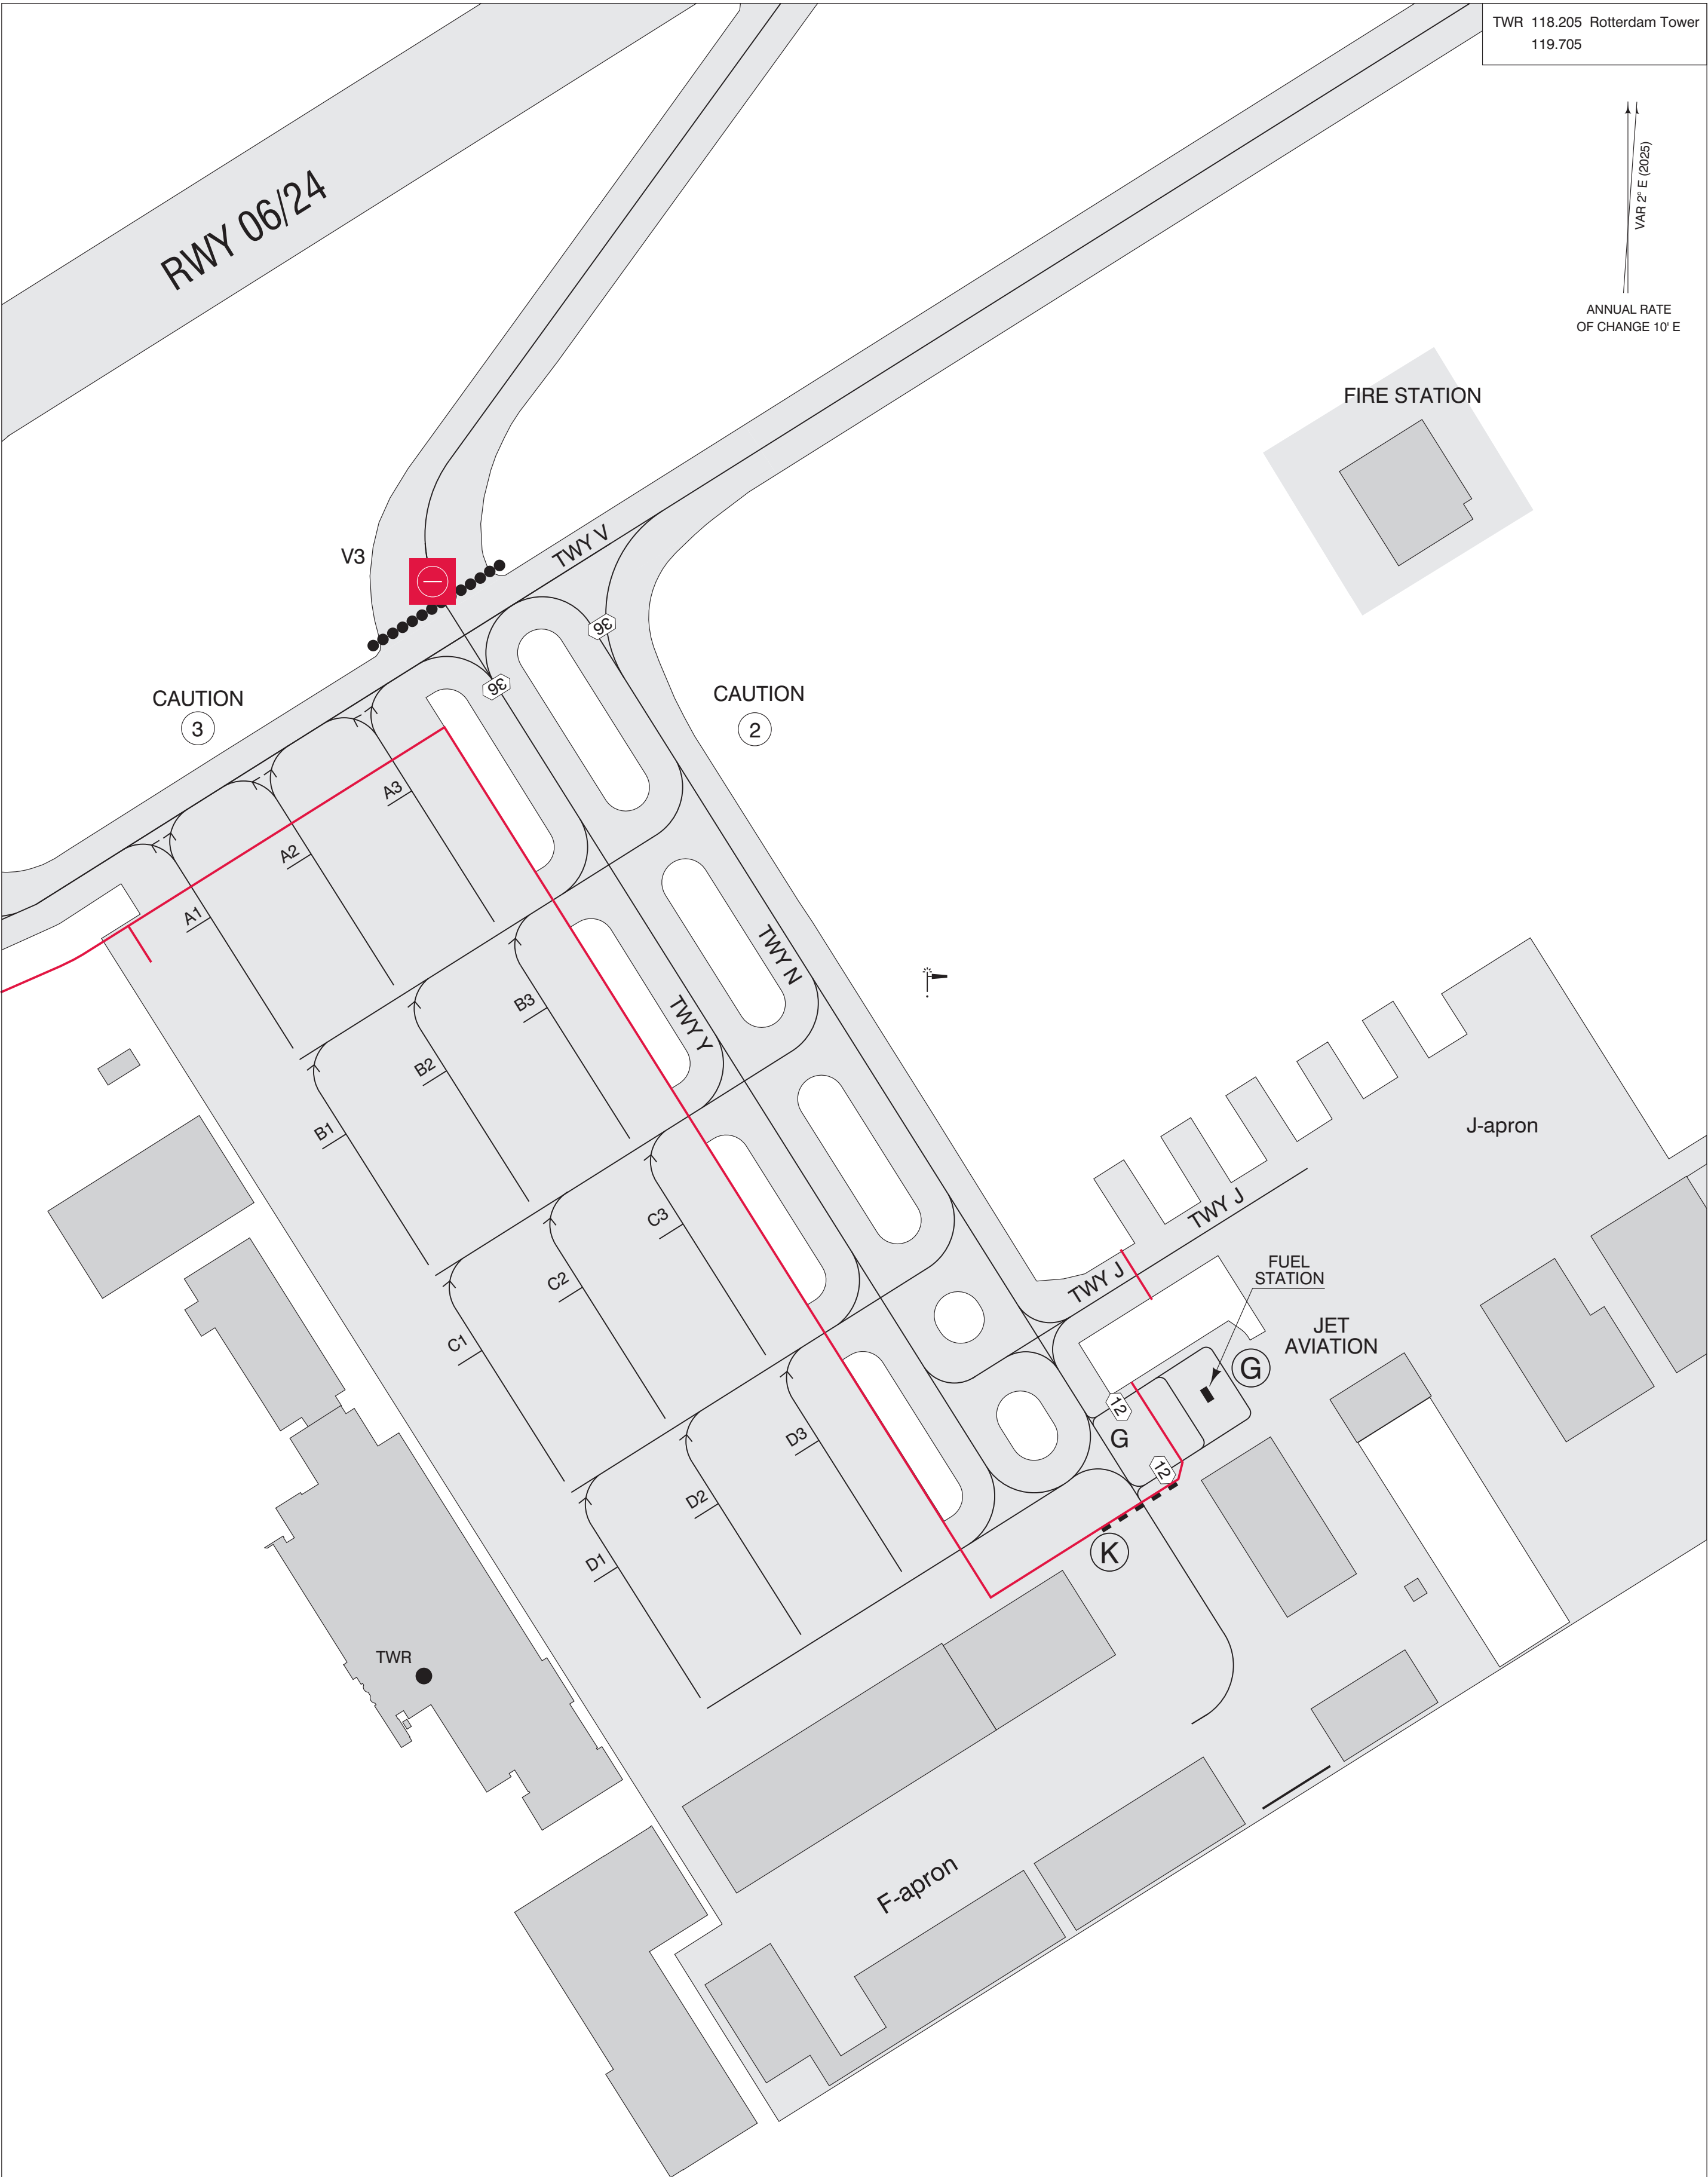


TWR 118.205 Rotterdam Tower
119.705

VAR 2° E (2025)

ANNUAL RATE
OF CHANGE 10' E

- CAUTION:
- Follow-me service is mandatory for aircraft with wingspan > 36 M, for details see AD 2.20.
 - Simultaneous use of TWY N and TWY Y is not allowed for aircraft with wingspan > 36 M.
 - Between TWY V1 and TWY V3 aircraft with wingspan > 36 M must strictly adhere to follow-me instructions to stay clear of obstacles.

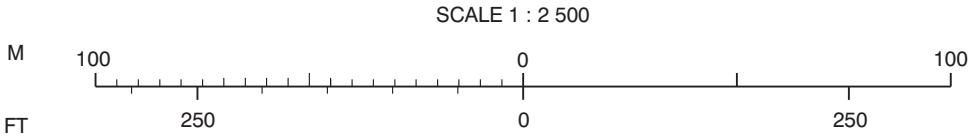

DIRECTIONS ARE MAGNETIC
ELEVATION IN FEET AMSL
DIMENSIONS IN METERS

LEGEND:

- ATC service BDRY
- - - (K) Intermediate HLDG PSN unlighted
- (36) MAX WING SPAN
- ⊘ No-entry: RWY entry prohibited at this point
- X NOT IN USE
- One-way arrow
- STOP BAR

INS COORDINATES FOR ACFT STANDS

STAND	LAT	LONG
A1	515705.48N	0042558.16E
A2	515706.30N	0042600.21E
A3	515707.11N	0042602.25E
B1	515702.77N	0042601.00E
B2	515703.59N	0042603.05E
B3	515704.40N	0042605.09E
C1	515700.05N	0042603.85E
C2	515700.86N	0042605.89E
C3	515701.68N	0042607.94E
D1	515657.33N	0042606.69E
D2	515658.15N	0042608.73E
D3	515658.96N	0042610.78E