




Robots

LBR iiwa

LBR iiwa 7 R800, LBR iiwa 14 R820

Operating instructions

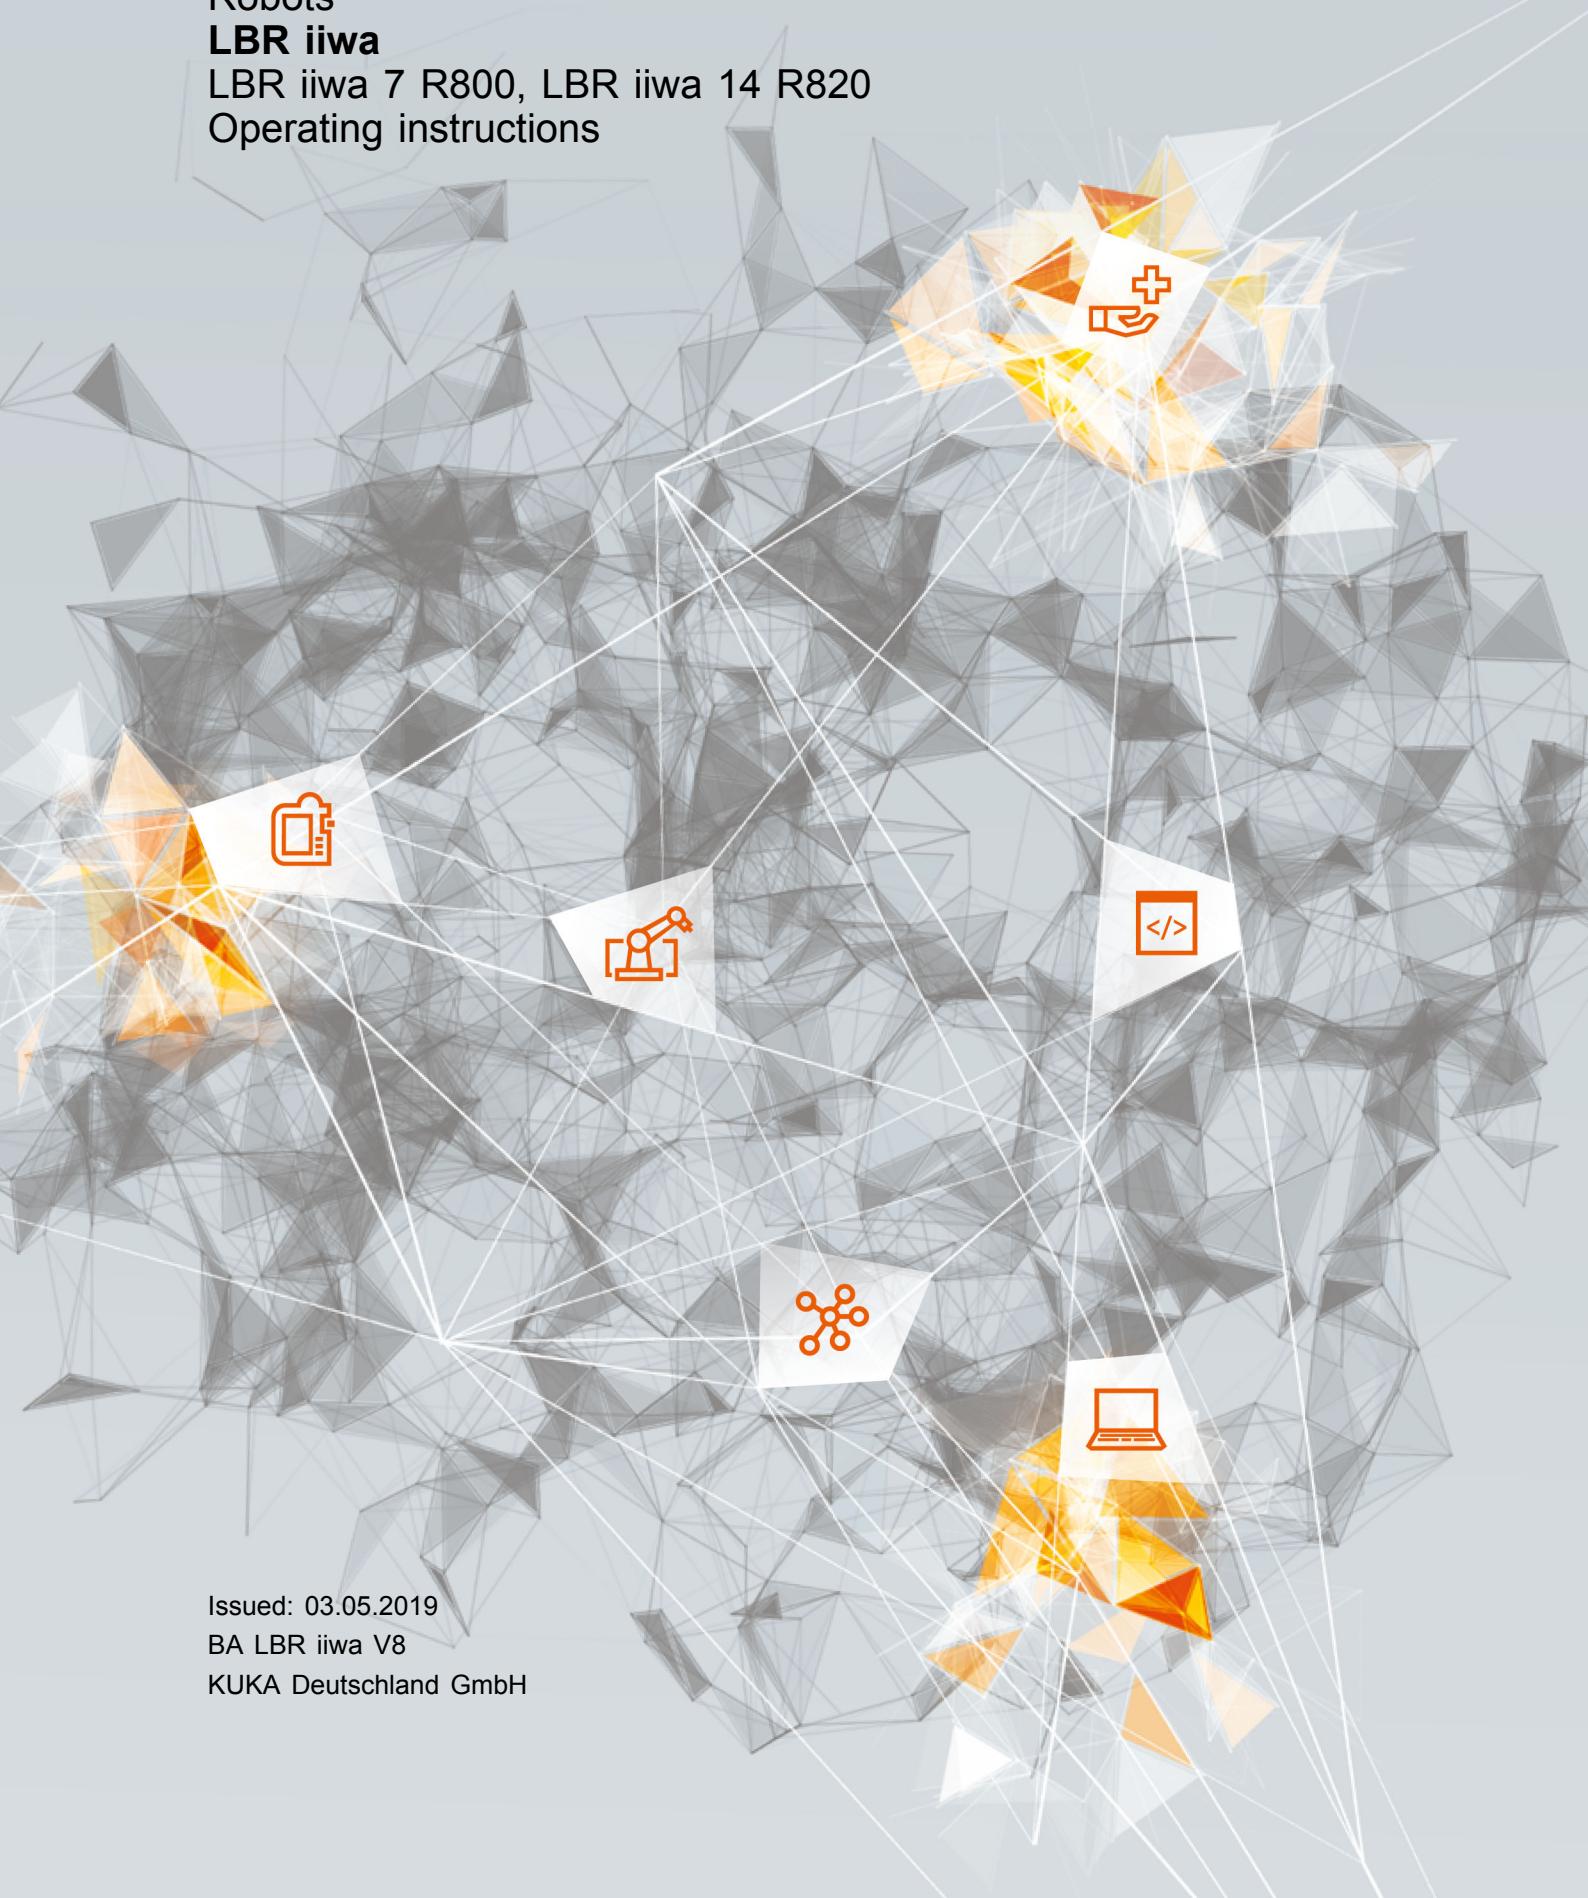

Issued: 03.05.2019

BA LBR iiwa V8

KUKA Deutschland GmbH

© Copyright 2019

KUKA Deutschland GmbH
Zugspitzstraße 140
D-86165 Augsburg
Germany

This documentation or excerpts therefrom may not be reproduced or disclosed to third parties without the express permission of KUKA Deutschland GmbH.

Other functions not described in this documentation may be operable in the controller. The user has no claims to these functions, however, in the case of a replacement or service work.

We have checked the content of this documentation for conformity with the hardware and software described. Nevertheless, discrepancies cannot be precluded, for which reason we are not able to guarantee total conformity. The information in this documentation is checked on a regular basis, however, and necessary corrections will be incorporated in the subsequent edition.

Subject to technical alterations without an effect on the function.

KIM-PS5-DOC

Translation of the original documentation

Publication: Pub BA LBR iiwa en
PB1881

Book structure: BA LBR iiwa V6.1
BS480

Version: BA LBR iiwa V8

Contents

1	Introduction.....	7
1.1	Industrial robot documentation.....	7
1.2	Representation of warnings and notes.....	7
1.3	Terms used.....	8
2	Purpose.....	9
2.1	Target group.....	9
2.2	Intended use.....	9
3	Product description.....	11
3.1	Overview of the robot system.....	11
3.2	Description of the LBR iiwa.....	11
4	Technical data.....	15
4.1	Technical data, overview.....	15
4.2	Technical data, LBR iiwa 7 R800.....	15
4.2.1	Basic data, LBR iiwa 7 R800.....	15
4.2.2	Axis data, LBR iiwa 7 R800.....	16
4.2.3	Payloads, LBR iiwa 7 R800.....	18
4.2.4	Foundation data, LBR iiwa 7 R800.....	19
4.3	Technical data, LBR iiwa 14 R820.....	21
4.3.1	Basic data, LBR iiwa 14 R820.....	21
4.3.2	Axis data, LBR iiwa 14 R820.....	22
4.3.3	Payloads, LBR iiwa 14 R820.....	24
4.3.4	Foundation data, LBR iiwa 14 R820.....	25
4.4	Plates and labels.....	27
4.5	Stopping distances and times.....	29
4.5.1	General information.....	29
4.5.2	Terms used.....	30
4.5.3	Stopping distances and stopping times for LBR iiwa 7 R800.....	32
4.5.3.1	Stopping distances and stopping times for STOP 0, axis 1 to axis 4.....	32
4.5.3.2	Stopping distances and stopping times for STOP 1, axis 1.....	33
4.5.3.3	Stopping distances and stopping times for STOP 1, axis 2.....	35
4.5.3.4	Stopping distances and stopping times for STOP 1, axis 3.....	37
4.5.3.5	Stopping distances and stopping times for STOP 1, axis 4.....	39
4.5.4	Stopping distances and stopping times for LBR iiwa 14 R820.....	40
4.5.4.1	Stopping distances and stopping times for STOP 0, axis 1 to axis 4.....	41
4.5.4.2	Stopping distances and stopping times for STOP 1, axis 1.....	42
4.5.4.3	Stopping distances and stopping times for STOP 1, axis 2.....	44
4.5.4.4	Stopping distances and stopping times for STOP 1, axis 3.....	46
4.5.4.5	Stopping distances and stopping times for STOP 1, axis 4.....	48
5	Safety.....	51
5.1	Legal framework.....	51
5.1.1	Liability.....	51
5.1.2	Intended use of the industrial robot.....	51
5.1.3	EC declaration of conformity and declaration of incorporation.....	52

5.2	Safety functions.....	52
5.2.1	Terms used.....	53
5.2.2	Personnel.....	55
5.2.3	Workspace, safety zone and danger zone.....	56
5.2.4	Safety-oriented functions.....	57
5.2.4.1	EMERGENCY STOP device.....	58
5.2.4.2	Enabling device.....	58
5.2.4.3	"Operator safety" signal.....	59
5.2.4.4	External EMERGENCY STOP device.....	59
5.2.4.5	External safety stop 1 (path-maintaining)	59
5.2.4.6	External enabling device.....	60
5.2.4.7	External safe operational stop.....	60
5.2.5	Triggers for safety-oriented stop reactions.....	60
5.2.6	Non-safety-oriented functions.....	61
5.2.6.1	Mode selection.....	61
5.2.6.2	Velocity monitoring in T1.....	62
5.2.6.3	Software limit switches.....	63
5.3	Additional protective equipment.....	63
5.3.1	Jog mode.....	63
5.3.2	Labeling on the industrial robot.....	63
5.3.3	External safeguards.....	63
5.4	Safety measures.....	64
5.4.1	General safety measures.....	64
5.4.2	IT security.....	66
5.4.3	Transportation.....	66
5.4.4	Start-up and recommissioning.....	66
5.4.5	Manual mode.....	69
5.4.6	Automatic mode.....	70
5.4.7	Maintenance and repair.....	70
5.4.8	Decommissioning, storage and disposal.....	71
5.4.9	Safety measures for "single point of control".....	71
5.5	Applied standards and directives.....	72
6	Planning.....	73
6.1	Mounting variant.....	73
6.1.1	Machine frame mounting with centering.....	73
6.2	Connecting cables and interfaces.....	75
7	Transportation.....	77
7.1	Transportation.....	77
7.1.1	Transportation with transport packaging.....	77
7.1.2	Transportation with transport box (optional).....	78
8	Start-up and recommissioning.....	81
8.1	Installing the machine frame mounting assembly.....	81
8.2	Installing a floor-mounted robot.....	81
8.3	Overview of connecting cables and interfaces.....	82
9	Maintenance.....	85
9.1	Maintenance.....	85

9.2	Cleaning the robot.....	85
10	Repair.....	87
11	Decommissioning, storage and disposal.....	89
11.1	Decommissioning, floor-mounted robots.....	89
11.2	Storage.....	90
11.3	Disposal.....	90
12	KUKA Service.....	93
12.1	Requesting support.....	93
12.2	KUKA Customer Support.....	93
	Index	101

1 Introduction

1.1 Industrial robot documentation

The industrial robot documentation consists of the following parts:

- Documentation for the robot arm
- Documentation for the robot controller
- Documentation for the smartPAD-2
- Operating and programming instructions for the System Software
- Instructions for options and accessories
- Spare parts in KUKA.Xpert

Each of these sets of instructions is a separate document.

1.2 Representation of warnings and notes

Safety

These warnings are provided for safety purposes and **must** be observed.



DANGER

These warnings mean that it is certain or highly probable that death or severe injuries **will** occur, if no precautions are taken.



WARNING

These warnings mean that death or severe injuries **may** occur, if no precautions are taken.



CAUTION

These warnings mean that minor injuries **may** occur, if no precautions are taken.

NOTICE

These warnings mean that damage to property **may** occur, if no precautions are taken.



These warnings contain references to safety-relevant information or general safety measures.

These warnings do not refer to individual hazards or individual precautionary measures.

This warning draws attention to procedures which serve to prevent or remedy emergencies or malfunctions:

SAFETY INSTRUCTION

The following procedure must be followed exactly!

Procedures marked with this warning **must** be followed exactly.

Notices

These notices serve to make your work easier or contain references to further information.



Tip to make your work easier or reference to further information.

1.3 Terms used

Term	Description
LBR iiwa	Lightweight robot intelligent industrial work assistant
Manipulator	The robot arm and the associated electrical installations
KCP smartPAD	<p>The KCP (KUKA Control Panel) teach pendant has all the operator control and display functions required for operating and programming the industrial robot.</p> <p>The KCP variant for the KUKA Sunrise Cabinet is called KUKA smartPAD. The general term "KCP", however, is generally used in this documentation.</p>

2 Purpose

2.1 Target group

This documentation is aimed at users with the following knowledge and skills:

- Advanced knowledge of mechanical engineering
- Advanced knowledge of electrical engineering
- Knowledge of the robot controller system



For optimal use of our products, we recommend that our customers take part in a course of training at KUKA College. Information about the training program can be found at www.kuka.com or can be obtained directly from our subsidiaries.

2.2 Intended use

Use

The industrial robot is intended for handling tools and fixtures, or for processing or transferring components or products. Use is only permitted under the specified environmental conditions.

Misuse

Any use or application deviating from the intended use is deemed to be impermissible misuse; examples of such misuse include:

- Transportation of persons and animals
- Use as a climbing aid
- Operation outside the permissible operating parameters
- Use in potentially explosive environments
- Outdoor operation
- Leaning on the robot arm
- Underground operation

NOTICE

Changing the structure of the robot, e.g. by drilling holes, can result in damage to the components. This is considered improper use and leads to loss of guarantee and liability entitlements.

3 Product description

3.1 Overview of the robot system

A robot system (>>> *Fig. 3-1*) comprises all the assemblies of an industrial robot, including the manipulator (mechanical system and electrical installations), controller, connecting cables, end effector (tool) and other equipment.

The industrial robot consists of the following components:

- Manipulator
- KUKA Sunrise Cabinet robot controller
- KUKA smartPAD control panel
- Connecting cables
- Software
- Options, accessories

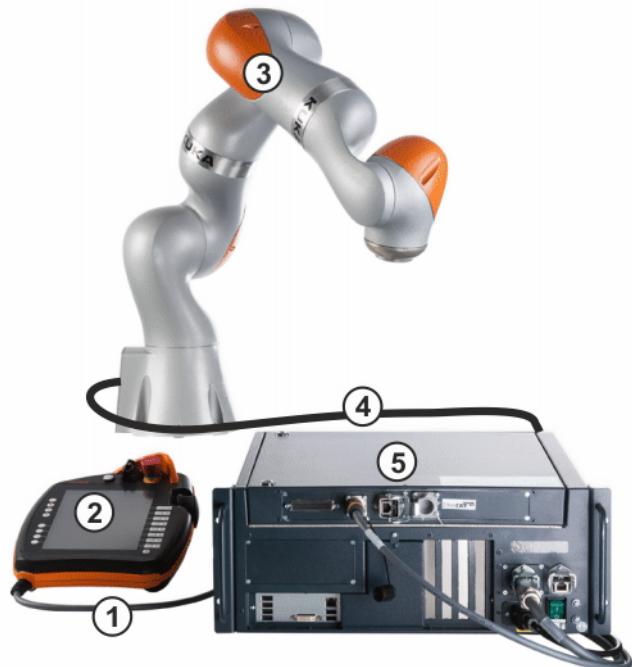


Fig. 3-1: Overview of robot system

- 1 Connecting cable to the smartPAD
- 2 KUKA smartPAD control panel
- 3 Manipulator
- 4 Connecting cable to KUKA Sunrise Cabinet robot controller
- 5 KUKA Sunrise Cabinet robot controller

3.2 Description of the LBR iiwa

Overview

The LBR iiwa is classified as a lightweight robot and is a jointed-arm robot with 7 axes. All drive units and current-carrying cables are located inside the robot.

Every axis contains multiple sensors that provide signals for robot control (e.g. position control and impedance control) and that are also used as a protective function for the robot. Every axis is monitored by sensors: axis range sensors ensure that the permissible axis range is adhered to, torque sensors ensure that the permissible axis loads are not exceeded, and temperature sensors monitor the thermal limit values of the electronics. In the case of an unfavorable combination of permanently high demand on robot power and external temperature influences, the LBR is protected by this temperature monitoring which switches it off if the thermal limit values are exceeded. Following a cooling time, the LBR can be restarted with no need for additional measures. Technical Support is available to answer any questions.

The kinematic system of both robot variants is of redundant design due to its 7 axes and consists of the following principal components:

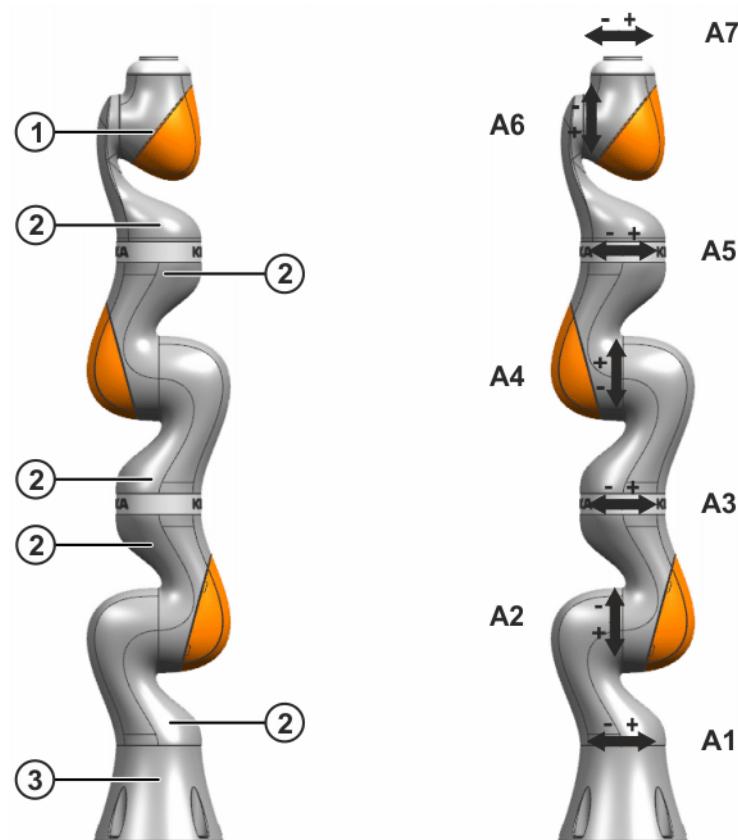


Fig. 3-2: Main assemblies and robot axes

- 1 In-line wrist
- 2 Joint module
- 3 Base frame

In-line wrist

The robot is fitted with a 2-axis in-line wrist. The motors are located in axes A6 and A7.

Joint module

The joint modules consist of an aluminum structure. The drive units are situated inside these modules. In this way, the drive units are linked to one another via the aluminum structures.

Base frame

The base frame is the base of the robot. Interface A1 is located at the rear of the base frame. It constitutes the interface for the connecting cables between the robot, the controller and the energy supply system.

Electrical installations

The electrical installations include all the supply and control cables for the motors of axes A1 to A7. All the connections on the motors are plug-and-socket connections. The entire cabling is routed internally in the robot.

The connecting cable is connected to the robot controller. The energy supply system cables are connected to the periphery.

4 Technical data

4.1 Technical data, overview

The technical data for the individual robot types can be found in the following sections:

Robot	Technical data
LBR iiwa 7 R800	<ul style="list-style-type: none"> Basic data (>>> 4.2.1 "Basic data, LBR iiwa 7 R800" Page 15) Axis data (>>> 4.2.2 "Axis data, LBR iiwa 7 R800" Page 16) Payloads (>>> 4.2.3 "Payloads, LBR iiwa 7 R800" Page 18) Mounting base data (>>> 4.2.4 "Foundation data, LBR iiwa 7 R800" Page 19) Plates and labels (>>> 4.4 "Plates and labels" Page 27) Stopping distances and times (>>> 4.5.3 "Stopping distances and stopping times for LBR iiwa 7 R800" Page 32)
LBR iiwa 14 R820	<ul style="list-style-type: none"> Basic data (>>> 4.3.1 "Basic data, LBR iiwa 14 R820" Page 21) Axis data (>>> 4.3.2 "Axis data, LBR iiwa 14 R820" Page 22) Payloads (>>> 4.3.3 "Payloads, LBR iiwa 14 R820" Page 24) Mounting base data (>>> 4.3.4 "Foundation data, LBR iiwa 14 R820" Page 25) Plates and labels (>>> 4.4 "Plates and labels" Page 27) Stopping distances and times (>>> 4.5.4 "Stopping distances and stopping times for LBR iiwa 14 R820" Page 40)

4.2 Technical data, LBR iiwa 7 R800

4.2.1 Basic data, LBR iiwa 7 R800

Basic data

	LBR iiwa 7 R800
Number of axes	7
Number of controlled axes	7
Volume of working envelope	1.7 m ³
Pose repeatability (ISO 9283)	± 0.1 mm
Weight	approx. 23.9 kg
Rated payload	7 kg

LBR iiwa 7 R800	
Maximum reach	800 mm
Protection rating (IEC 60529)	IP54
Protection rating, in-line wrist (IEC 60529)	IP54
Sound level	< 75 dB (A)
Mounting position	Floor; Ceiling; Wall
Footprint	-
Hole pattern: mounting surface for kinematic system	C184
Permissible angle of inclination	-
Default color	Base frame: white aluminum (RAL 9006); Moving parts: white aluminum (RAL 9006); Cover: KUKA orange 2567
Controller	KUKA Sunrise Cabinet
Transformation name	-

Ambient conditions

Ambient temperature during operation	5 °C to 45 °C (278 K to 318 K)
Ambient temperature during storage/transportation	0 °C to 45 °C (273 K to 318 K)
Air humidity	20 % to 80 %



In the case of overheating, the robot switches off automatically and is thus protected against thermal destruction.

4.2.2 Axis data, LBR iiwa 7 R800

Axis data

Motion range	
A1	±170 °
A2	±120 °
A3	±170 °
A4	±120 °
A5	±170 °
A6	±120 °
A7	±175 °
Speed with rated payload	
A1	98 °/s
A2	98 °/s
A3	100 °/s
A4	130 °/s

A5	140 °/s
A6	180 °/s
A7	180 °/s

Working envelope

The diagram (>>> [Fig. 4-1](#)) shows the shape and size of the working envelope for the robot:

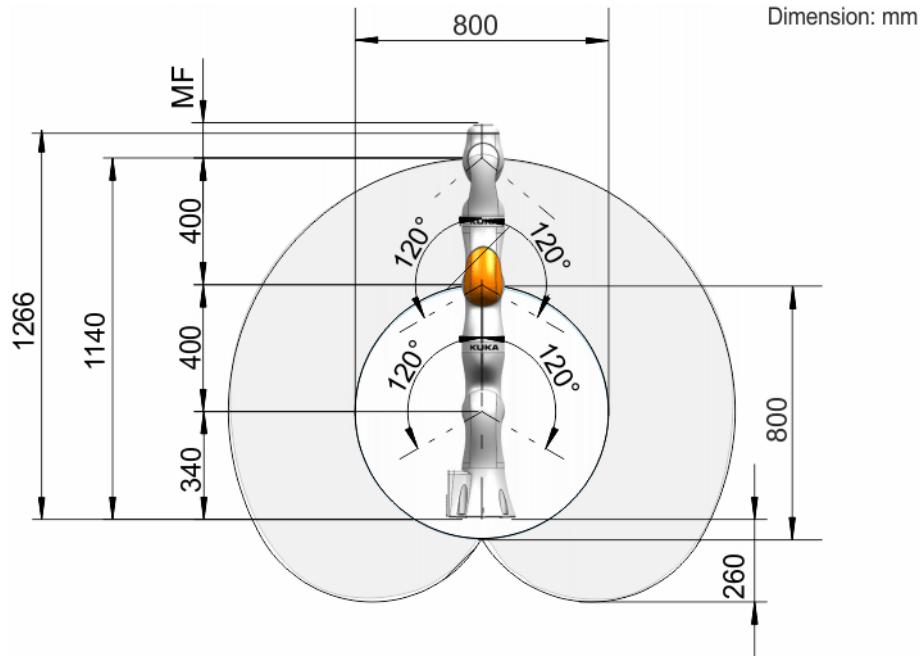


Fig. 4-1: LBR iiwa 7 R800 working envelope, side view

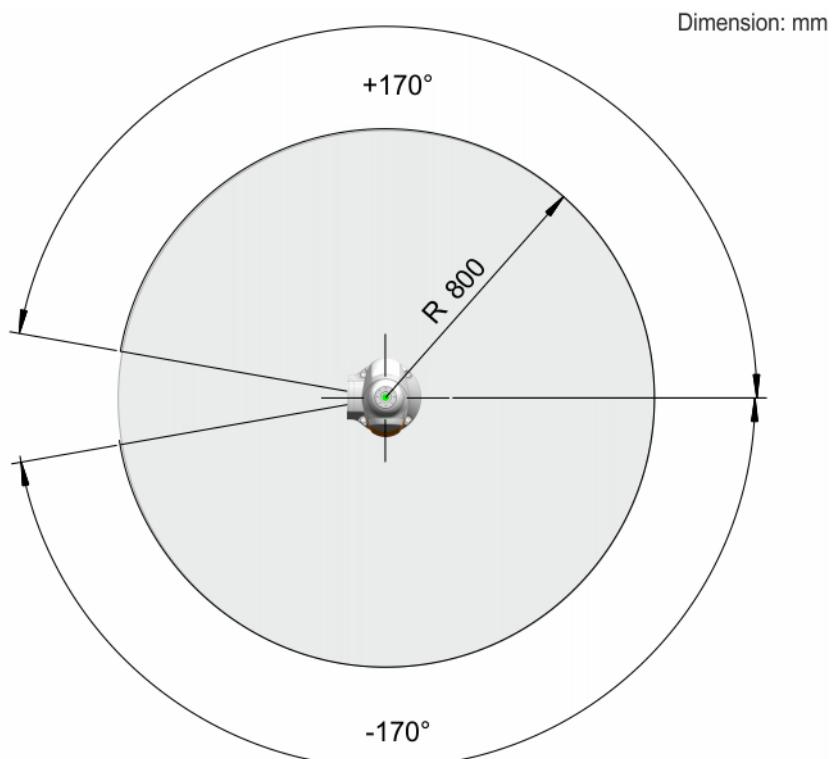


Fig. 4-2: LBR iiwa 7 R800 working envelope, top view



The height of the LBR iiwa depends on the media flange mounted on it. The dimensions of the media flange can be found in the Media Flange documentation.

4.2.3 Payloads, LBR iiwa 7 R800

Payloads

Rated payload	7 kg
Rated mass moment of inertia	0.3 kgm ²
Rated total load	7 kg
Rated supplementary load, base frame	0 kg
Maximum supplementary load, base frame	-
Rated supplementary load, rotating column	0 kg
Maximum supplementary load, rotating column	-
Rated supplementary load, link arm	0 kg
Maximum supplementary load, link arm	-
Rated supplementary load, arm	0 kg
Maximum supplementary load, arm	-
Nominal distance to load center of gravity	
L _{xy}	35 mm
L _z	60 mm

Load center of gravity

For all payloads, the load center of gravity refers to the distance from the face of the mounting flange on axis A7.

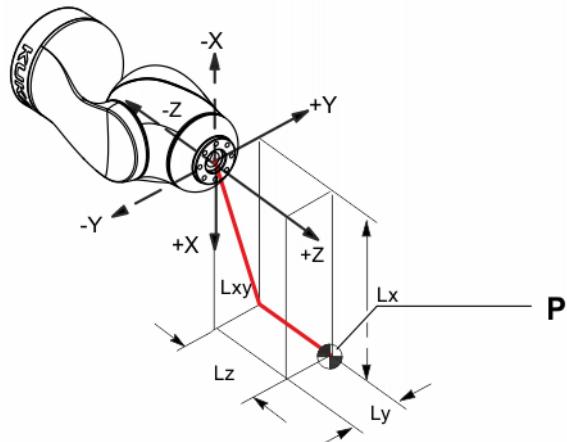


Fig. 4-3: Load center of gravity

Permissible mass inertia at the design point (L_x , L_y , L_z) is 0.3 kgm².

Payload diagram

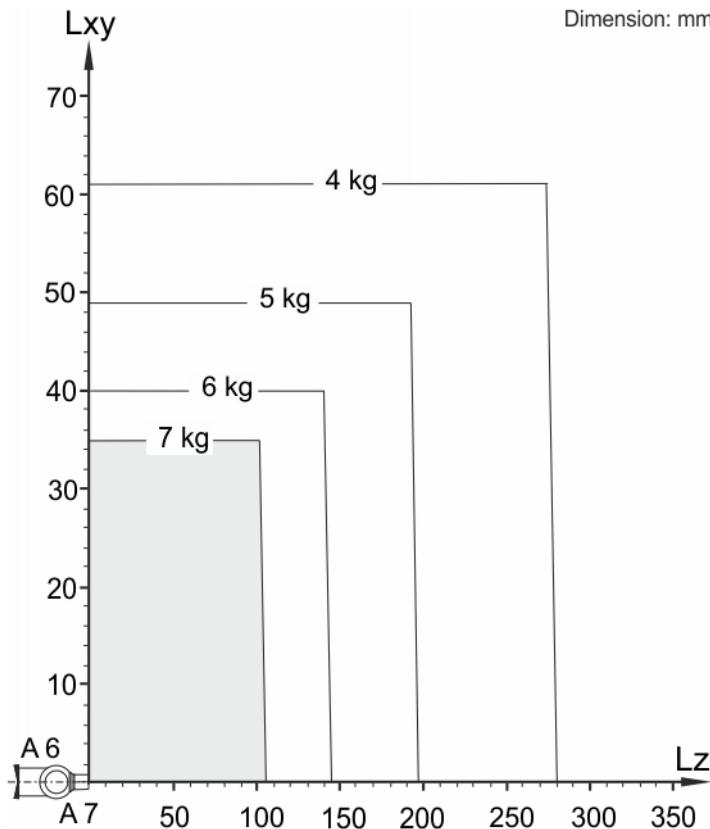


Fig. 4-4: LBR iiwa 7 R800 payload diagram



The payloads depend on the type of media flange used.
Further information about the payloads dependent on the media flange can be found in the **Media Flange** documentation.

NOTICE

This loading curve corresponds to the maximum load capacity. Both values (payload and mass moment of inertia) must be checked in all cases. Exceeding this capacity will reduce the service life of the robot and overload the motors and the gears; in any such case KUKA Customer Support must be consulted beforehand.

The values determined here are necessary for planning the robot application. For commissioning the robot, additional input data are required in accordance with the operating and programming instructions of the control software.

Supplementary load

The robot cannot carry a supplementary load.

4.2.4 Foundation data, LBR iiwa 7 R800

Foundation loads

The specified forces and moments already include the payload and the inertia force (weight) of the robot.

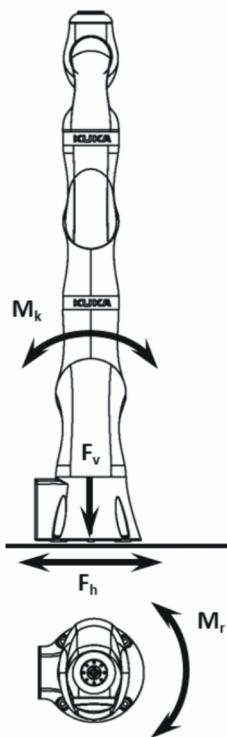


Fig. 4-5: Loads acting on the foundation, floor mounting

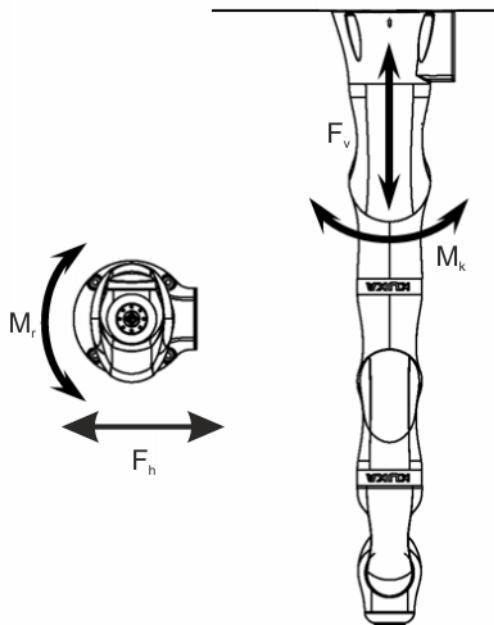


Fig. 4-6: Loads acting on the foundation, ceiling mounting

Vertical force $F(v)$	
$F(v \text{ normal})$	-
$F(v \text{ max})$	524 N
Horizontal force $F(h)$	
$F(h \text{ normal})$	-
$F(h \text{ max})$	240 N
Tilting moment $M(k)$	

M(k normal)	-
M(k max)	310 Nm
Torque about axis 1 M(r)	
M(r normal)	-
M(r max)	156 Nm

Vertical force F(v), horizontal force F(h), tilting torque M(k), torque about axis 1 M(r)

NOTICE

The foundation loads specified in the table are the maximum loads that may occur. They must be referred to when dimensioning the foundations and must be adhered to for safety reasons. Failure to do so may result in material damage.

4.3 Technical data, LBR iiwa 14 R820

4.3.1 Basic data, LBR iiwa 14 R820

Basic data

	LBR iiwa 14 R820
Number of axes	7
Number of controlled axes	7
Volume of working envelope	1.8 m ³
Pose repeatability (ISO 9283)	± 0.15 mm
Weight	approx. 29.9 kg
Rated payload	14 kg
Maximum reach	820 mm
Protection rating (IEC 60529)	IP54
Protection rating, in-line wrist (IEC 60529)	IP54
Sound level	< 75 dB (A)
Mounting position	Floor; Ceiling; Wall
Footprint	-
Hole pattern: mounting surface for kinematic system	C216
Permissible angle of inclination	-
Default color	Base frame: white aluminum (RAL 9006); Moving parts: white aluminum (RAL 9006); Cover: KUKA orange 2567
Controller	KUKA Sunrise Cabinet
Transformation name	-

Ambient conditions

Ambient temperature during operation	5 °C to 45 °C (278 K to 318 K)
Ambient temperature during storage/transportation	0 °C to 45 °C (273 K to 318 K)
Air humidity	20 % to 80 %



In the case of overheating, the robot switches off automatically and is thus protected against thermal destruction.

4.3.2 Axis data, LBR iiwa 14 R820

Axis data

Motion range	
A1	±170 °
A2	±120 °
A3	±170 °
A4	±120 °
A5	±170 °
A6	±120 °
A7	±175 °
Speed with rated payload	
A1	85 °/s
A2	85 °/s
A3	100 °/s
A4	75 °/s
A5	130 °/s
A6	135 °/s
A7	135 °/s

Working envelope

The diagram (>>> *Fig. 4-7*) shows the shape and size of the working envelope for the robot:

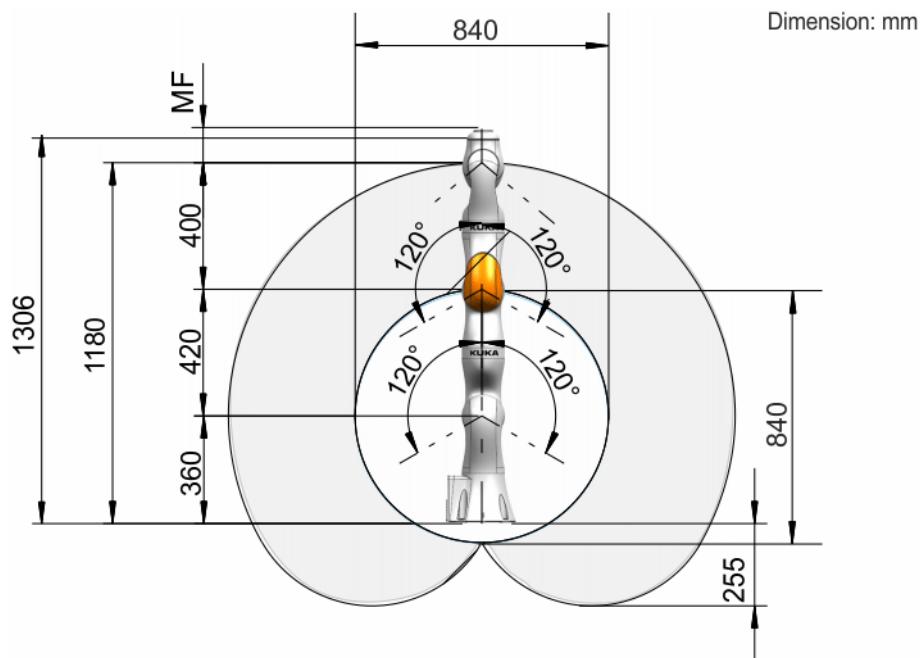


Fig. 4-7: LBR iiwa 14 R820 working envelope, side view

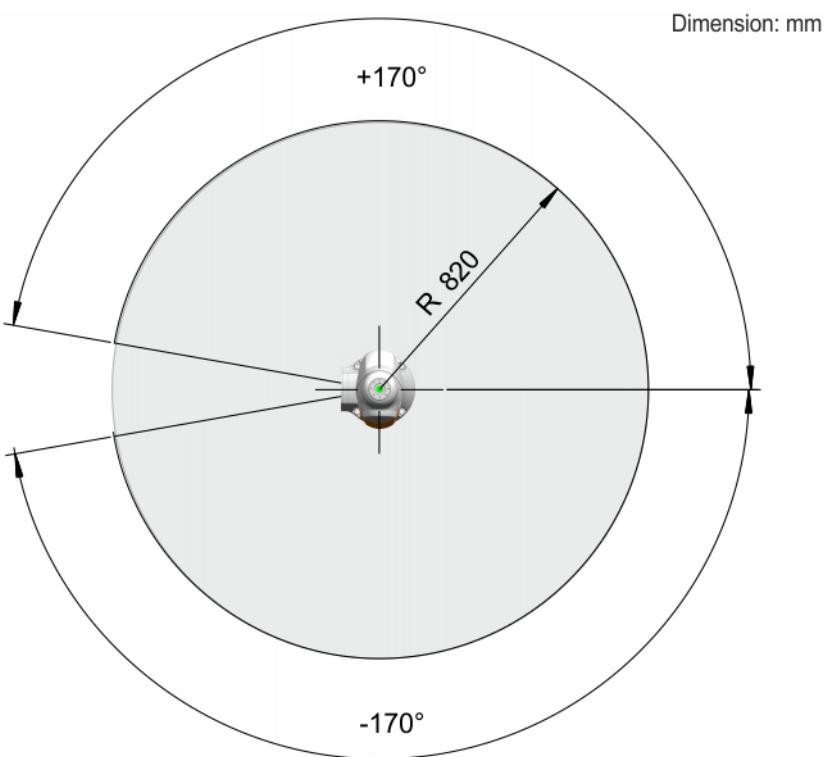


Fig. 4-8: LBR iiwa 14 R820 working envelope, top view



The height of the LBR iiwa depends on the media flange mounted on it. The dimensions of the media flange can be found in the Media Flange documentation.

4.3.3 Payloads, LBR iiwa 14 R820

Payloads

Rated payload	14 kg
Rated mass moment of inertia	0.3 kgm ²
Rated total load	14 kg
Rated supplementary load, base frame	0 kg
Maximum supplementary load, base frame	-
Rated supplementary load, rotating column	0 kg
Maximum supplementary load, rotating column	-
Rated supplementary load, link arm	0 kg
Maximum supplementary load, link arm	-
Rated supplementary load, arm	0 kg
Maximum supplementary load, arm	-
Nominal distance to load center of gravity	
L _{xy}	40 mm
L _z	44 mm

Load center of gravity

For all payloads, the load center of gravity refers to the distance from the face of the mounting flange on axis A7.

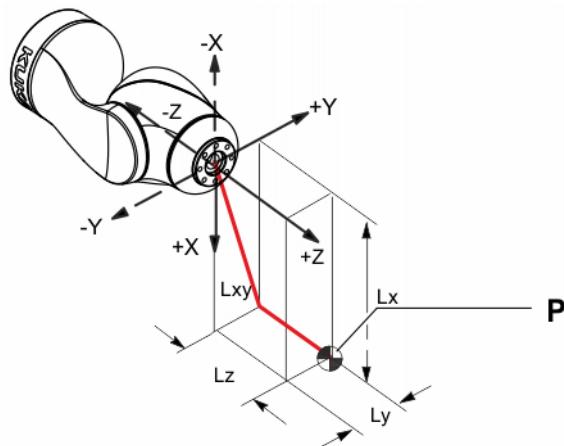


Fig. 4-9: Load center of gravity

Permissible mass inertia at the design point (L_x , L_y , L_z) is 0.3 kgm^2 .

Payload diagram

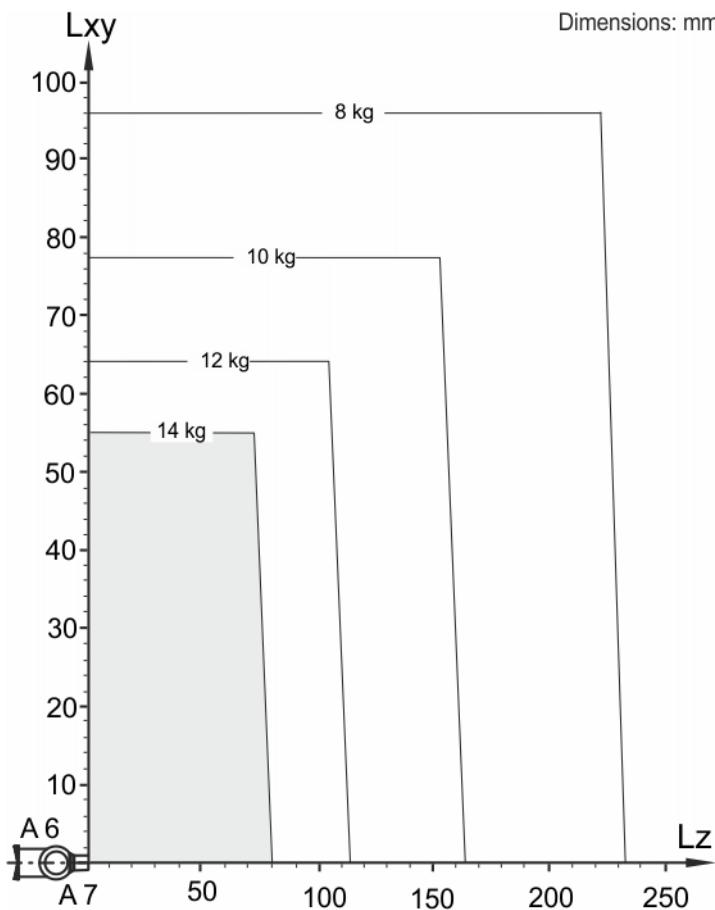


Fig. 4-10: LBR iiwa 14 R820 payload diagram



The payloads depend on the type of media flange used. Further information about the payloads dependent on the media flange can be found in the **Media Flange** documentation.

NOTICE

This loading curve corresponds to the maximum load capacity. Both values (payload and mass moment of inertia) must be checked in all cases. Exceeding this capacity will reduce the service life of the robot and overload the motors and the gears; in any such case KUKA Customer Support must be consulted beforehand.

The values determined here are necessary for planning the robot application. For commissioning the robot, additional input data are required in accordance with the operating and programming instructions of the control software.

Supplementary load

The robot cannot carry a supplementary load.

4.3.4 Foundation data, LBR iiwa 14 R820

Mounting base loads

The specified forces and moments already include the payload and the inertia force (weight) of the robot.

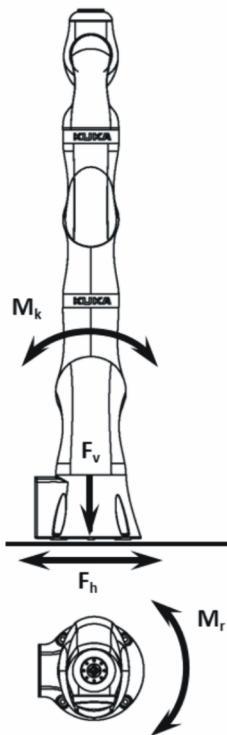


Fig. 4-11: Loads acting on the foundation, floor mounting

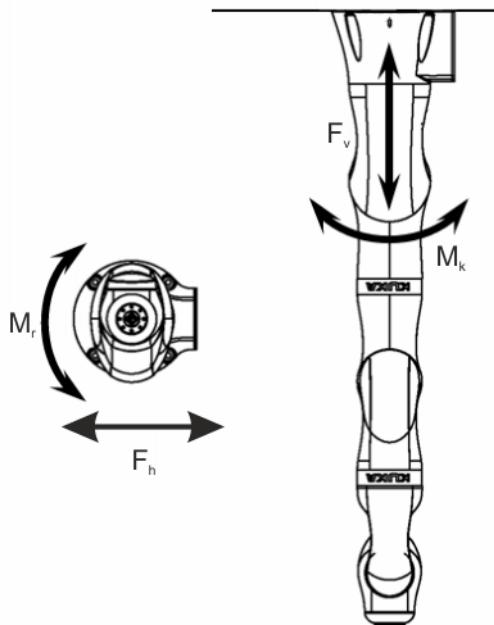


Fig. 4-12: Loads acting on the foundation, ceiling mounting

Vertical force $F(v)$	
$F(v \text{ normal})$	-
$F(v \text{ max})$	541.2 N
Horizontal force $F(h)$	
$F(h \text{ normal})$	-
$F(h \text{ max})$	228.4 N
Tilting moment $M(k)$	

M(k normal)	-
M(k max)	281.6 Nm
Torque about axis 1 M(r)	
M(r normal)	-
M(r max)	172.6 Nm

Vertical force F(v), horizontal force F(h), tilting torque M(k), torque about axis 1 M(r)

NOTICE

The foundation loads specified in the table are the maximum loads that may occur. They must be referred to when dimensioning the foundations and must be adhered to for safety reasons. Failure to do so may result in material damage.

4.4 Plates and labels

Identification plate

The following plates and labels are attached to the robot. They must not be removed or rendered illegible. Illegible plates and labels must be replaced.

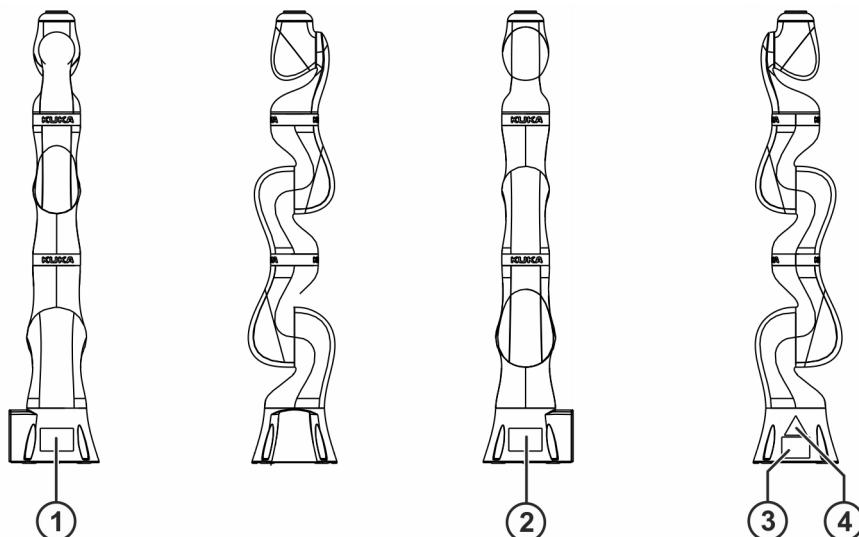
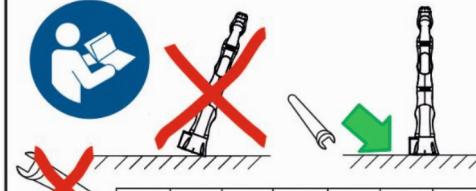
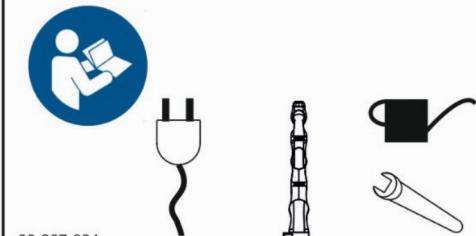
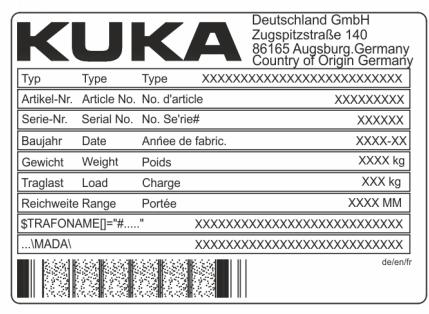


Fig. 4-13: Plates and labels

Item	Description																																				
1	  <p>00-267-894 A1 A2 A3 A4 A5 A6 A7 0° 0° 0° 0° 0° 0° 0° 0°</p> <table border="1"> <tr> <td>⚠ CAUTION</td> <td>Move the robot into its transport position before removing the mounting base!</td> </tr> <tr> <td>⚠ ATTENTION</td> <td>Amener le robot en position de transport avant de défaire la fixation aux fondations!</td> </tr> <tr> <td>⚠ VORSICHT</td> <td>Roboter vor Lösen der Fundamentbefestigung in Transportstellung bringen!</td> </tr> </table> <p>Transport position Before loosening the bolts of the mounting base, the robot must be in the transport position as indicated in the table. Risk of toppling!</p>	⚠ CAUTION	Move the robot into its transport position before removing the mounting base!	⚠ ATTENTION	Amener le robot en position de transport avant de défaire la fixation aux fondations!	⚠ VORSICHT	Roboter vor Lösen der Fundamentbefestigung in Transportstellung bringen!																														
⚠ CAUTION	Move the robot into its transport position before removing the mounting base!																																				
⚠ ATTENTION	Amener le robot en position de transport avant de défaire la fixation aux fondations!																																				
⚠ VORSICHT	Roboter vor Lösen der Fundamentbefestigung in Transportstellung bringen!																																				
2	  <p>00-267-894</p> <table border="1"> <tr> <td>⚠ CAUTION</td> <td>Secure the system before beginning work on the robot. Read and observe the safety instructions!</td> </tr> <tr> <td>⚠ ATTENTION</td> <td>Bloquer le système avant d'effectuer des travaux sur le robot. Lire et respecter les remarques relatives à la sécurité!</td> </tr> <tr> <td>⚠ VORSICHT</td> <td>Vor Arbeiten am Roboter, System sichern. Sicherheitshinweise lesen und beachten!</td> </tr> </table> <p>Work on the robot Before start-up, transportation or maintenance, read and follow the assembly and operating instructions.</p>	⚠ CAUTION	Secure the system before beginning work on the robot. Read and observe the safety instructions!	⚠ ATTENTION	Bloquer le système avant d'effectuer des travaux sur le robot. Lire et respecter les remarques relatives à la sécurité!	⚠ VORSICHT	Vor Arbeiten am Roboter, System sichern. Sicherheitshinweise lesen und beachten!																														
⚠ CAUTION	Secure the system before beginning work on the robot. Read and observe the safety instructions!																																				
⚠ ATTENTION	Bloquer le système avant d'effectuer des travaux sur le robot. Lire et respecter les remarques relatives à la sécurité!																																				
⚠ VORSICHT	Vor Arbeiten am Roboter, System sichern. Sicherheitshinweise lesen und beachten!																																				
3	 <p>KUKA Deutschland GmbH Zugspitzstraße 140 86165 Augsburg, Germany Country of Origin: Germany</p> <table border="1"> <tr> <td>Typ</td> <td>Type</td> <td>Type</td> <td>XXXXXXXXXXXXXXXXXXXXXX</td> </tr> <tr> <td>Artikel-Nr.</td> <td>Article No.</td> <td>No. d'article</td> <td>XXXXXXX</td> </tr> <tr> <td>Serie-Nr.</td> <td>Serial No.</td> <td>No. Série#</td> <td>XXXXXX</td> </tr> <tr> <td>Baujahr</td> <td>Date</td> <td>Annee de fabric.</td> <td>XXXX-XX</td> </tr> <tr> <td>Gewicht</td> <td>Weight</td> <td>Poids</td> <td>XXXX kg</td> </tr> <tr> <td>Traglast</td> <td>Load</td> <td>Charge</td> <td>XXX kg</td> </tr> <tr> <td>Reichweite</td> <td>Range</td> <td>Portée</td> <td>XXXX MM</td> </tr> <tr> <td colspan="2">\$TRAFONAME[]="#...."</td> <td></td> <td>XXXXXXXXXXXXXXXXXXXXXX</td> </tr> <tr> <td colspan="2">...IMADA/</td> <td></td> <td>XXXXXXXXXXXXXXXXXXXXXX</td> </tr> </table> <p>deien/r</p> <p>Identification plate Content according to Machinery Directive.</p>	Typ	Type	Type	XXXXXXXXXXXXXXXXXXXXXX	Artikel-Nr.	Article No.	No. d'article	XXXXXXX	Serie-Nr.	Serial No.	No. Série#	XXXXXX	Baujahr	Date	Annee de fabric.	XXXX-XX	Gewicht	Weight	Poids	XXXX kg	Traglast	Load	Charge	XXX kg	Reichweite	Range	Portée	XXXX MM	\$TRAFONAME[]="#...."			XXXXXXXXXXXXXXXXXXXXXX	...IMADA/			XXXXXXXXXXXXXXXXXXXXXX
Typ	Type	Type	XXXXXXXXXXXXXXXXXXXXXX																																		
Artikel-Nr.	Article No.	No. d'article	XXXXXXX																																		
Serie-Nr.	Serial No.	No. Série#	XXXXXX																																		
Baujahr	Date	Annee de fabric.	XXXX-XX																																		
Gewicht	Weight	Poids	XXXX kg																																		
Traglast	Load	Charge	XXX kg																																		
Reichweite	Range	Portée	XXXX MM																																		
\$TRAFONAME[]="#...."			XXXXXXXXXXXXXXXXXXXXXX																																		
...IMADA/			XXXXXXXXXXXXXXXXXXXXXX																																		

Item	Description
4	 <p>Danger zone Entering the danger zone of the robot is prohibited if the robot is in operation or ready for operation. Risk of injury!</p>

4.5 Stopping distances and times

4.5.1 General information

Information concerning the position control data:

- The stopping distance is the axis angle traveled by the robot from the moment the stop signal is triggered until the robot comes to a complete standstill.
- The stopping time is the time that elapses from the moment the stop signal is triggered until the robot comes to a complete standstill.
- The data are given for axes A1, A2, A3 and A4. These axes are the axes with the greatest deflection.
- The data apply to single-axis motions. Superposed axis motions can result in longer stopping distances.
- As reference, PTP motions with position control have been used without further parameterization (e.g. `robot.move(ptp(Zielpose))`).
- Stopping distances and stopping times in accordance with DIN EN ISO 10218-1, Annex B.
- Stop categories:
 - Stop category 0 » STOP 0
 - Stop category 1 » STOP 1 (path-maintaining)
according to IEC 60204-1
- The values specified are guide values determined by means of tests and simulation. They are average values which conform to the requirements of DIN EN ISO 10218-1. The actual stopping distances and stopping times may differ due to internal and external influences on the braking torque. It is therefore advisable to determine the exact stopping distances and stopping times under the real conditions of the actual robot application.
- Measuring technique
The stopping distances were measured using the robot-internal measuring technique with rated payloads.

- The wear on the brakes varies depending on the operating mode, robot application and the number of STOP 0 stops triggered. It is therefore advisable to check the stopping distance at least once a year.

The stopping distances and stopping times can be determined, for example, by using safety monitoring to trigger axis-specific or Cartesian workspace monitoring of the safety stop that is to be checked and evaluating the corresponding measured data from the trace (by means of DataRecorder).

4.5.2 Terms used

Term	Description
m	Mass of the rated load and the supplementary load on the arm.
Phi	Angle of rotation ($^{\circ}$) about the corresponding axis. This value can be entered in the controller via the KCP and is displayed on the KCP.
POV	Program override (%) = velocity of the robot motion. This value can be entered in the controller via the KCP and is displayed on the KCP.
Extension	Distance (l in %) between axis 1 and the intersection of axes 6 and 7.
KCP	The KCP teach pendant has all the operator control and display functions required for operating and programming the robot system.

Extension

The following figures illustrate the 0%, 33%, 66% and 100% extensions of axes A1-A4:

Extension 0%

The robot is in 0% extension when the axes are in the following positions:

Axis	A1 (J1)	A2 (J2)	A3 (J4)	A4 (J5)	A5 (J6)	A6 (J7)	A7 (J8)
1	0°	0°	0°	0°	0°	0°	0°
2	0°	0°	90°	0°	0°	0°	0°
3	0°	90°	0°	90°	0°	0°	0°
4	0°	90°	0°	90°	90°	0°	0°

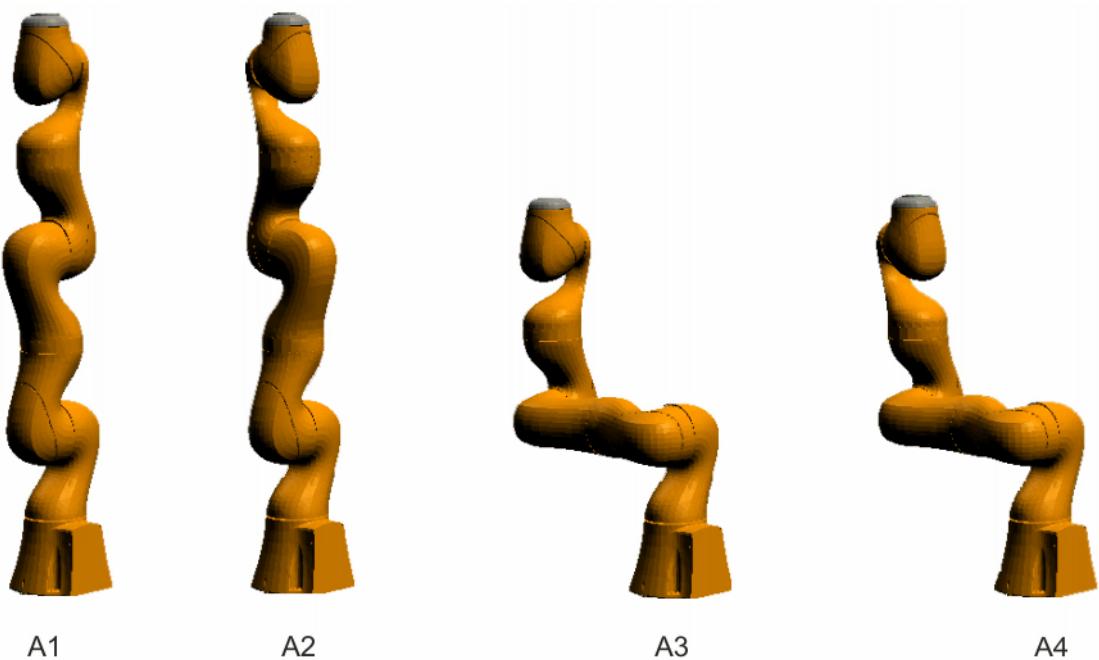


Fig. 4-14: Extension 0%, axis 1 - axis 4

Extension 33%

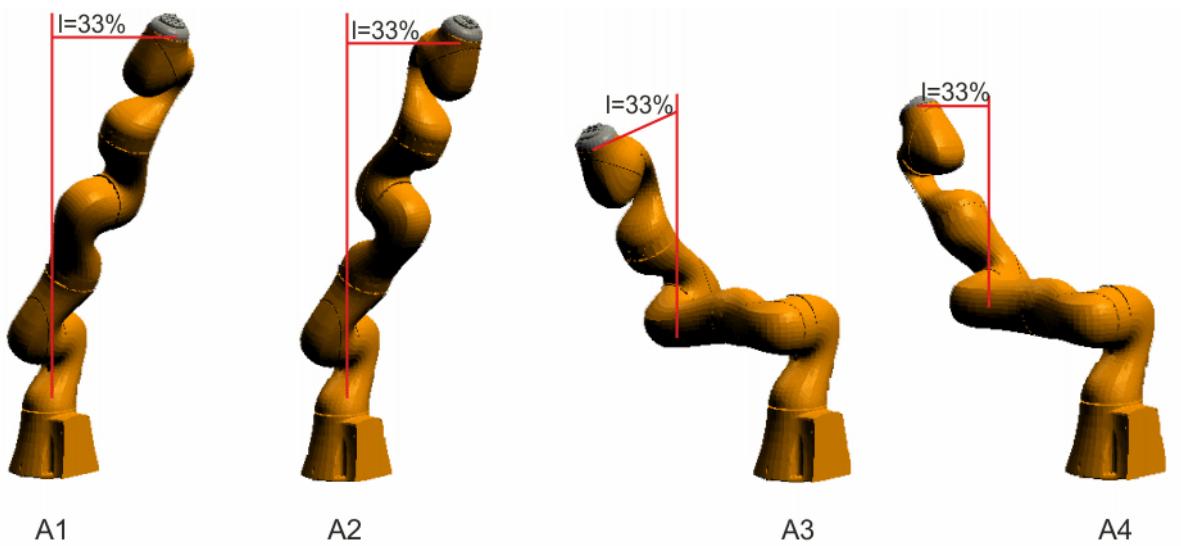


Fig. 4-15: Extension 33%, axis 1 - axis 4

Extension 66%

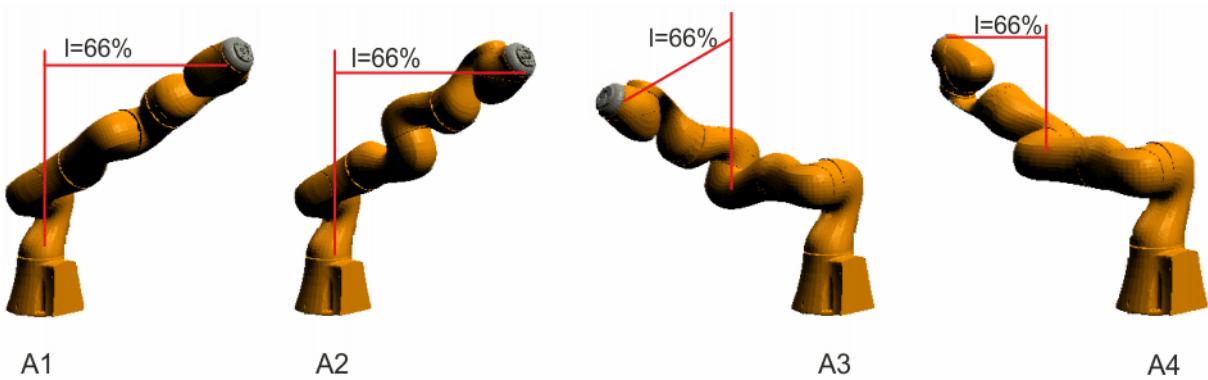


Fig. 4-16: 66% extension, axis 1 - axis 4


Extension 100%

Fig. 4-17: Extension 100%, axis 1 - axis 4

4.5.3 Stopping distances and stopping times for LBR iiwa 7 R800

The stopping distances and stopping times indicated apply to the following media flange:

- Basic flange

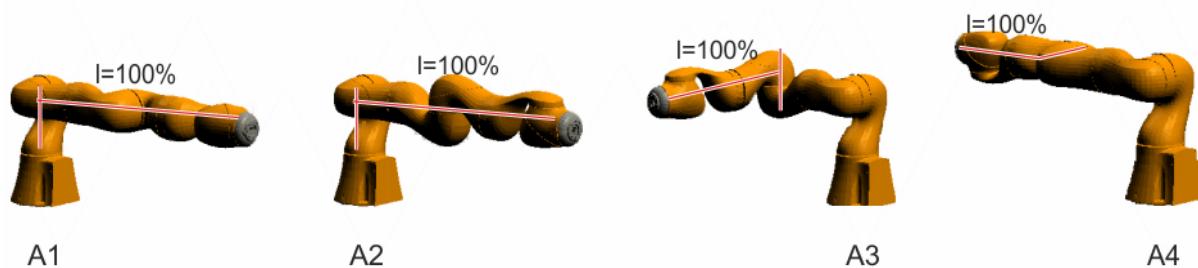

The stopping distances and times of other media flanges are specified in the media flange assembly and operating instructions.

4.5.3.1 Stopping distances and stopping times for STOP 0, axis 1 to axis 4

The table shows the stopping distances and stopping times after a STOP 0 (category 0 stop) is triggered. The values refer to the following configuration:

- Extension l = 100%
- Program override POV = 100%
- Mass m = maximum load (rated load + supplementary load on arm)

	Stopping distance (°)	Stopping time (s)
Axis 1	5.193	0.182
Axis 2	5.092	0.212
Axis 3	8.091	0.166
Axis 4	7.538	0.114

4.5.3.2 Stopping distances and stopping times for STOP 1, axis 1

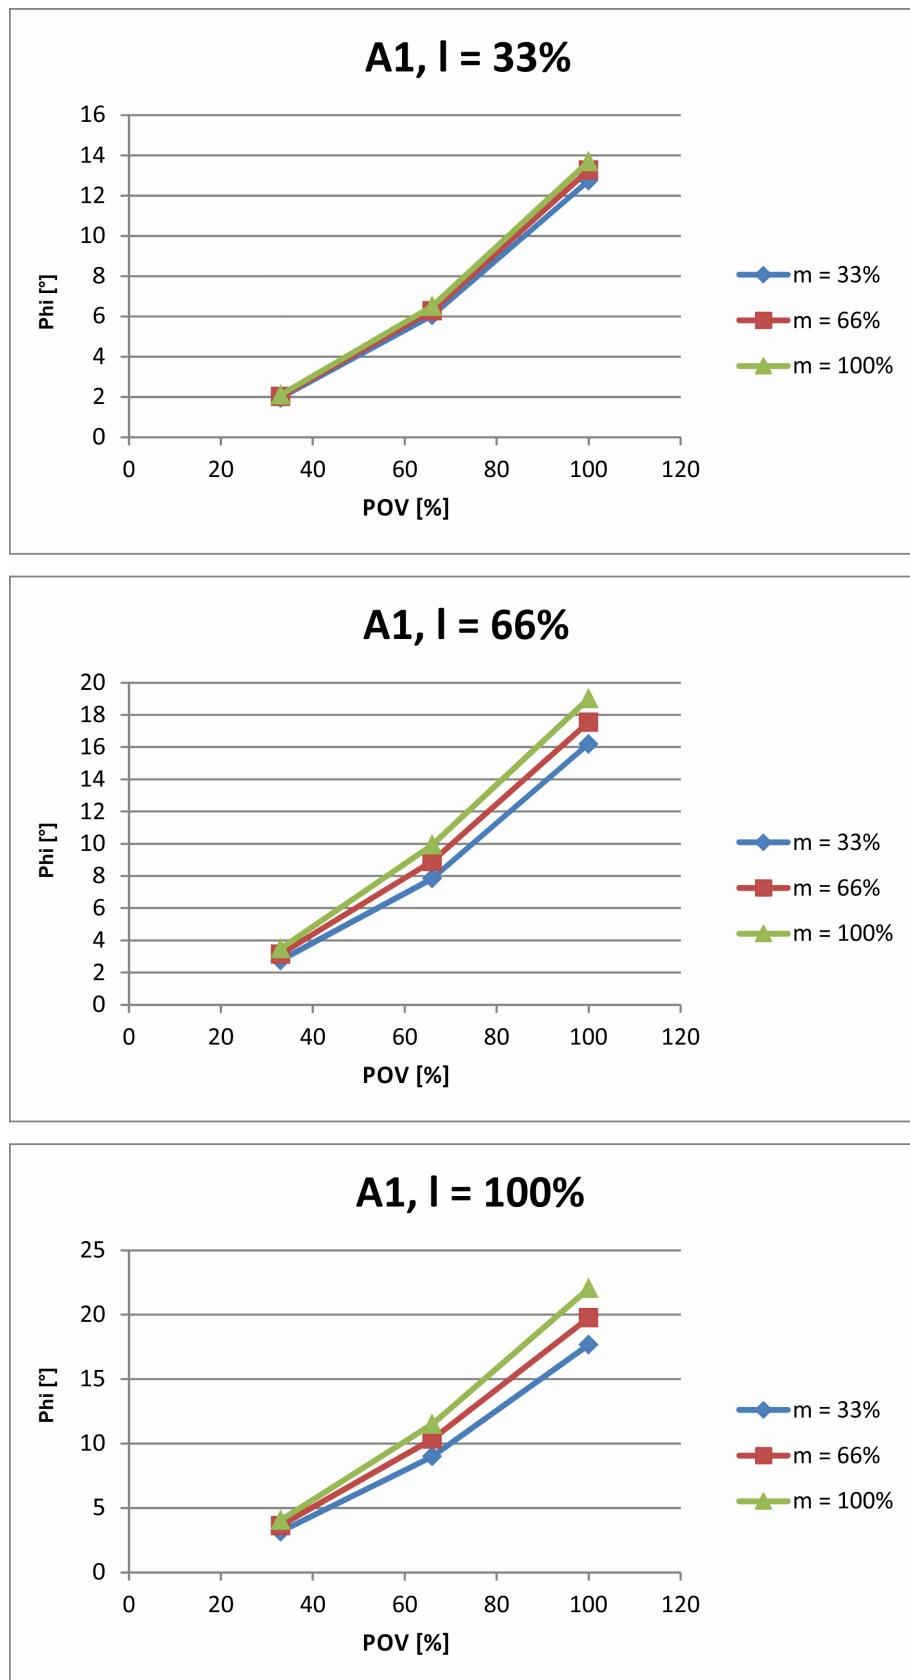


Fig. 4-18: Stopping distances for STOP 1, axis 1

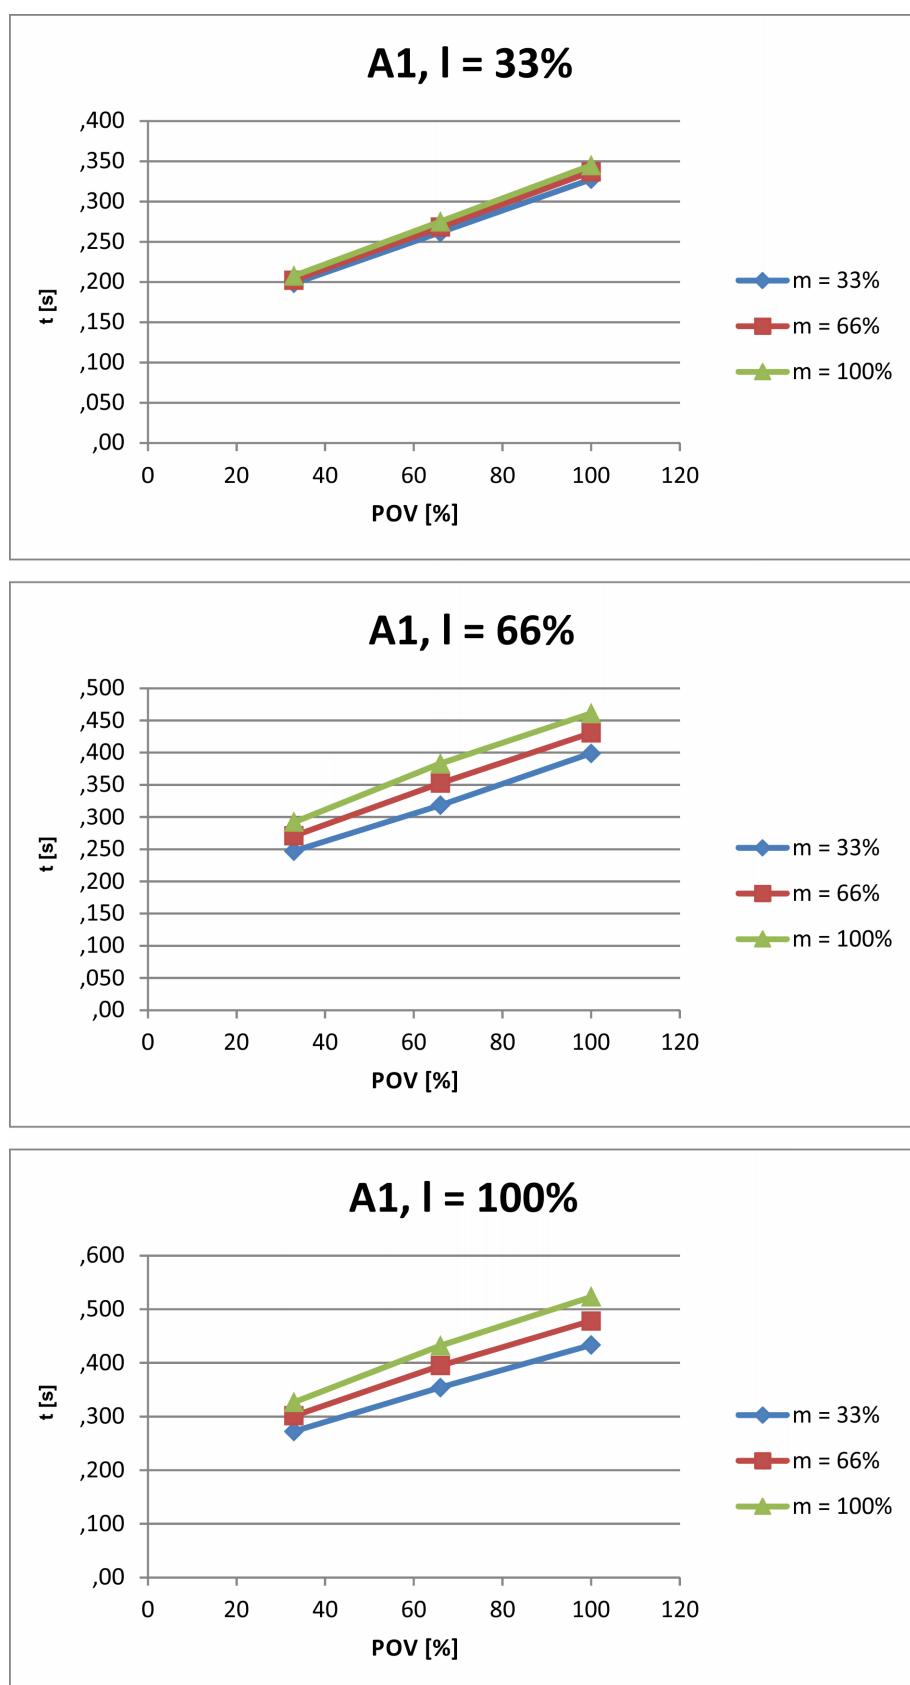


Fig. 4-19: Stopping times for STOP 1, axis 1

4.5.3.3 Stopping distances and stopping times for STOP 1, axis 2

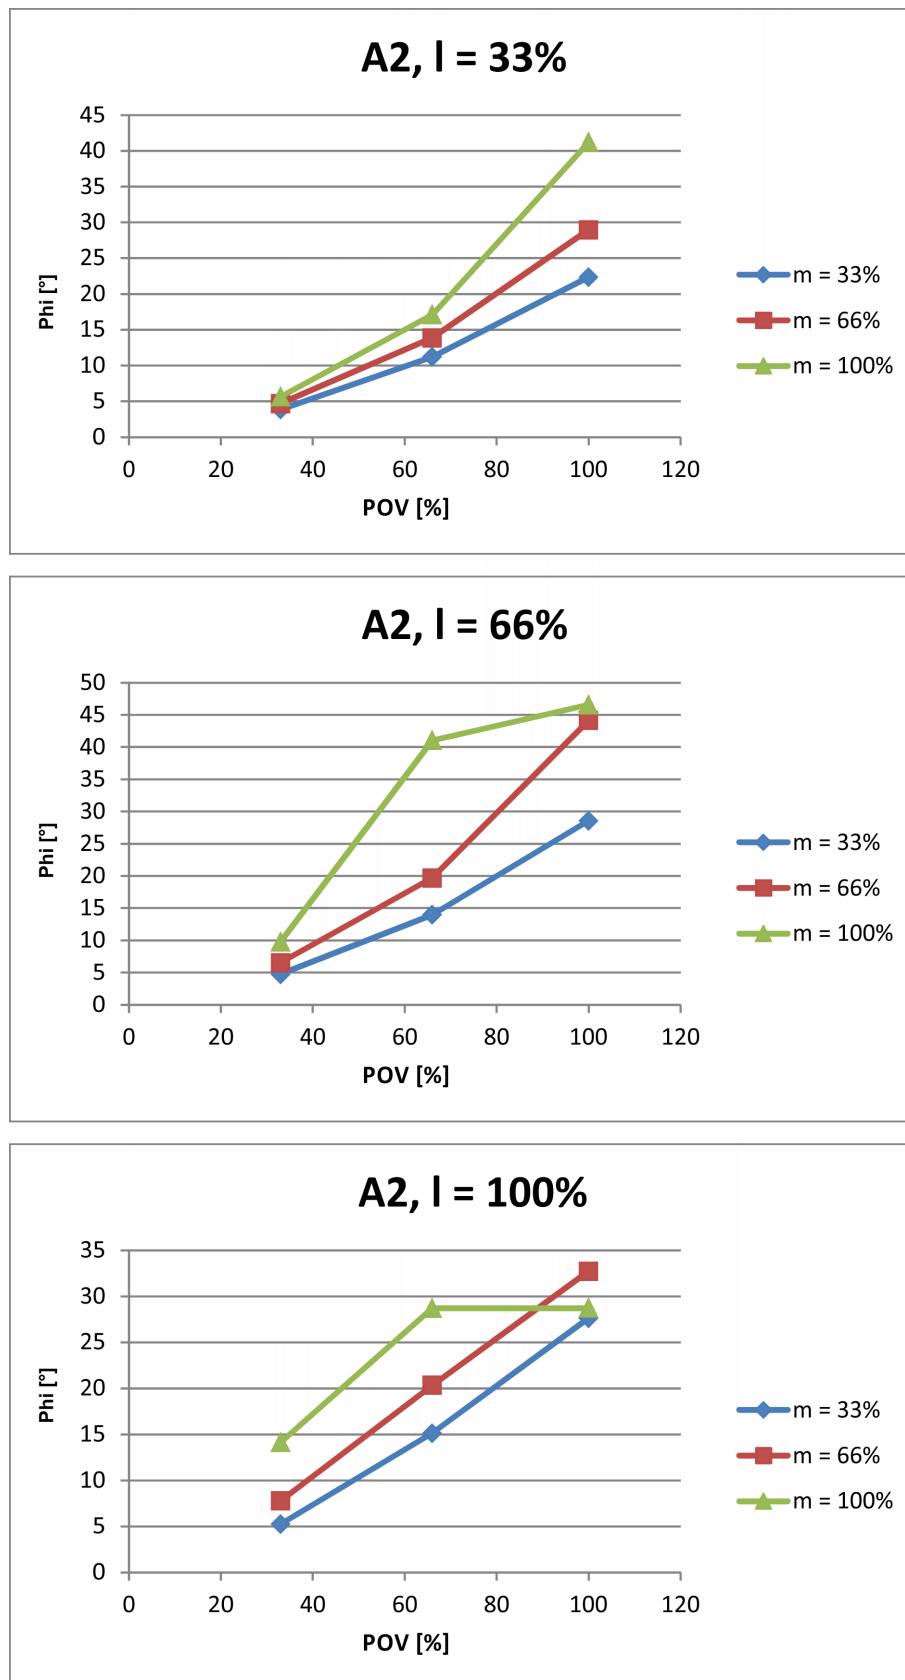


Fig. 4-20: Stopping distances for STOP 1, axis 2

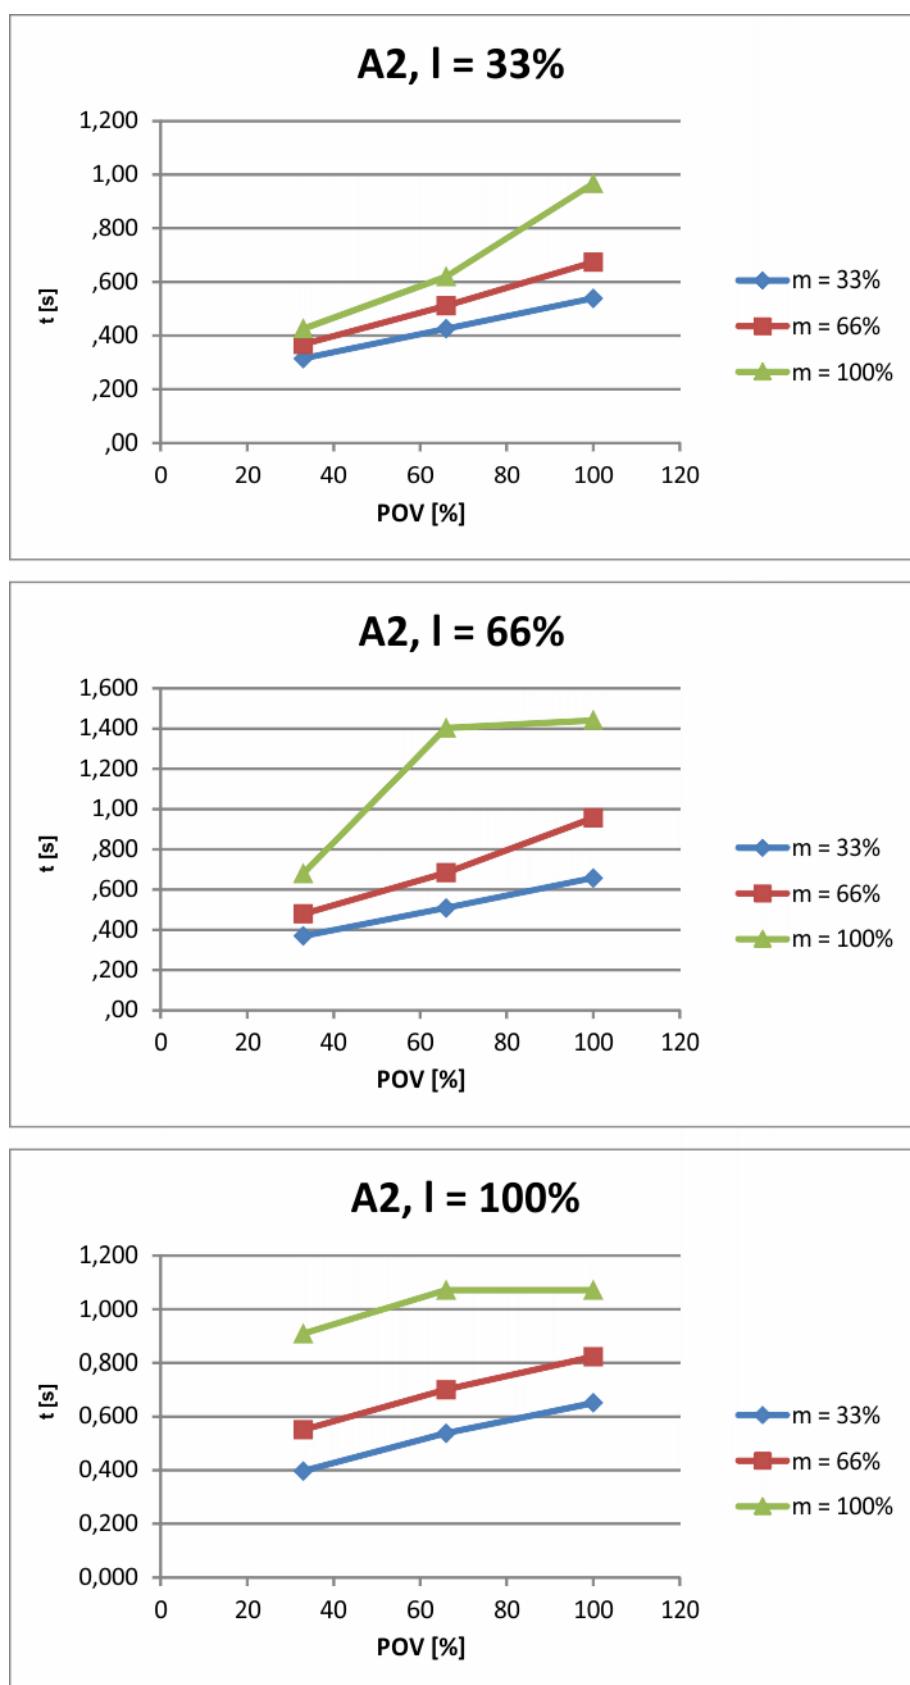


Fig. 4-21: Stopping times for STOP 1, axis 2

4.5.3.4 Stopping distances and stopping times for STOP 1, axis 3

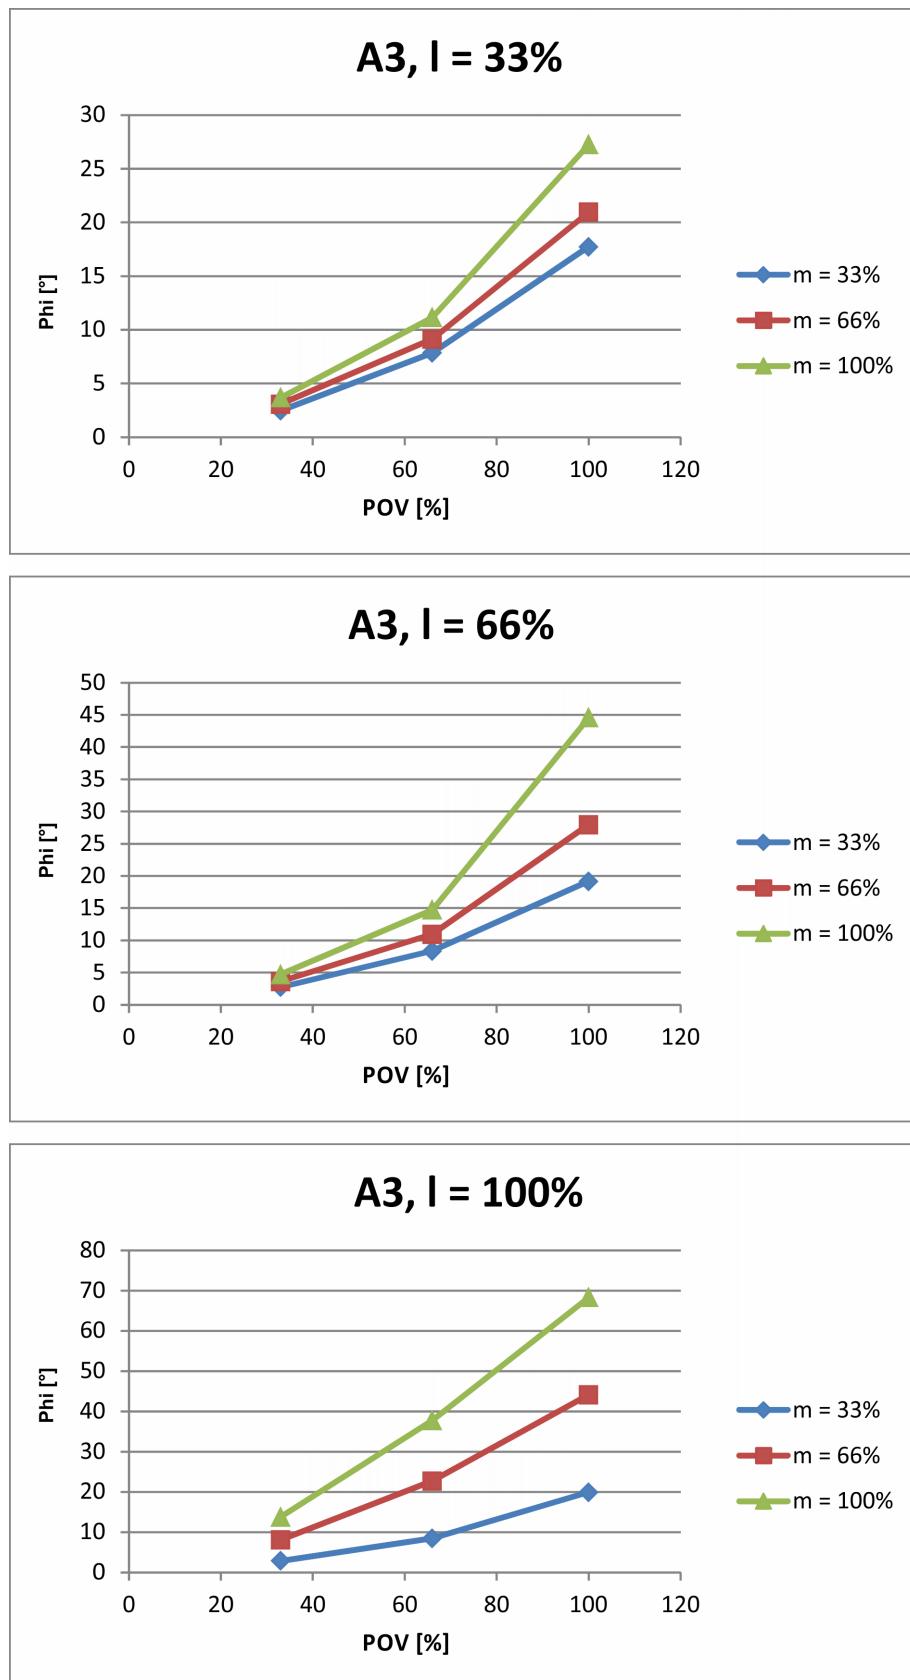


Fig. 4-22: Stopping distances for STOP 1, axis 3

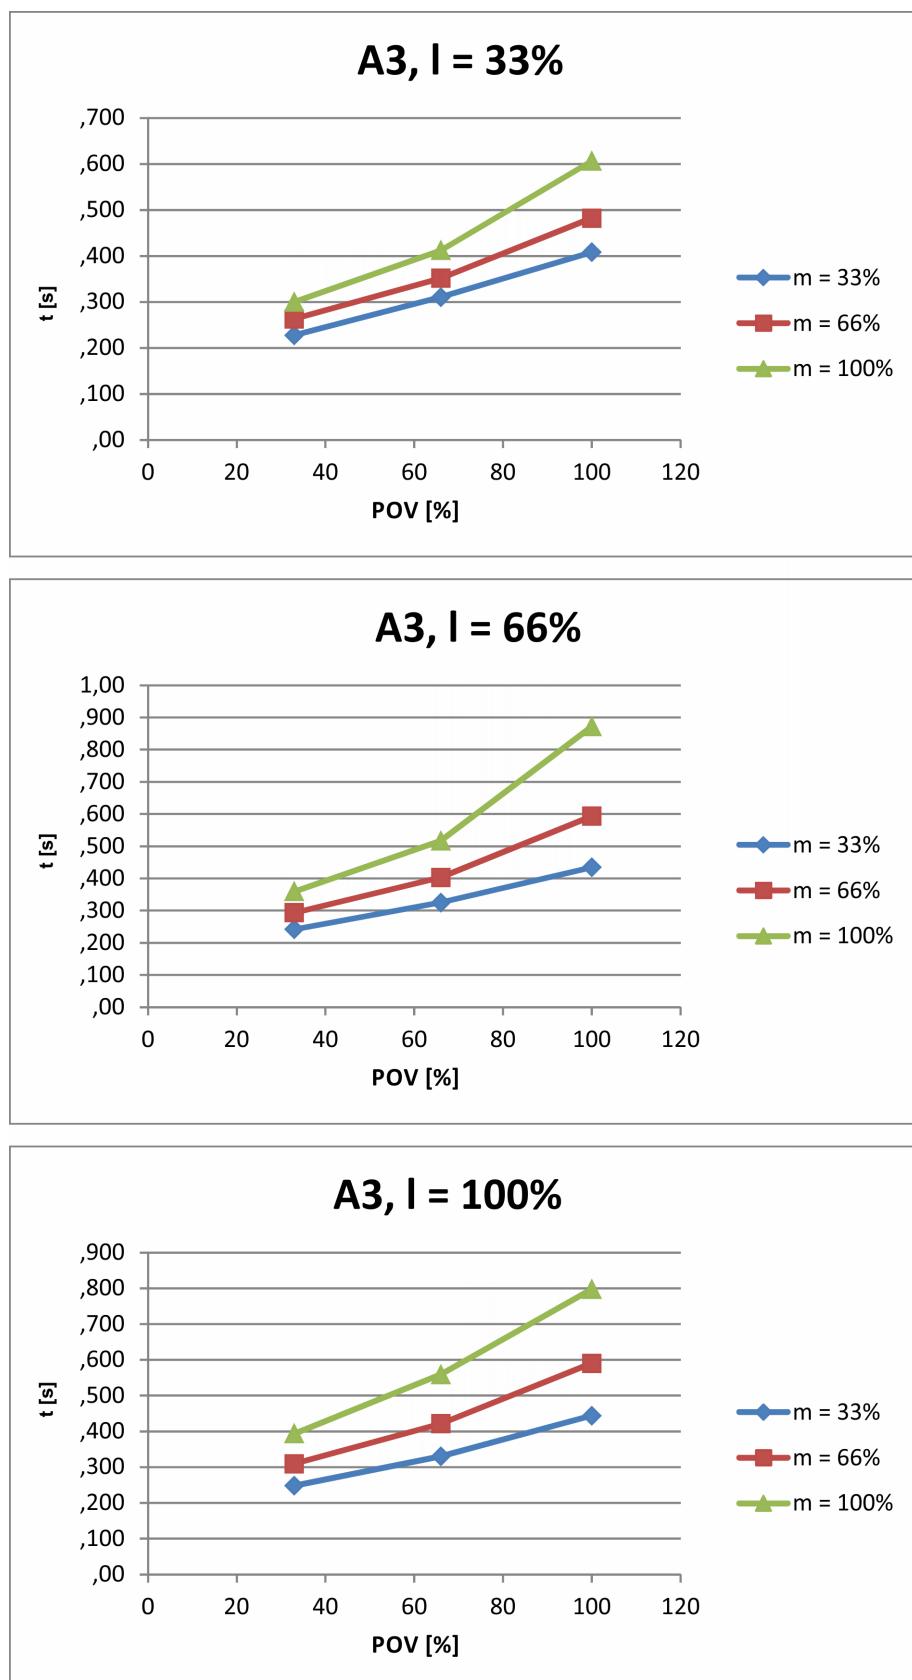


Fig. 4-23: Stopping times for STOP 1, axis 3

4.5.3.5 Stopping distances and stopping times for STOP 1, axis 4

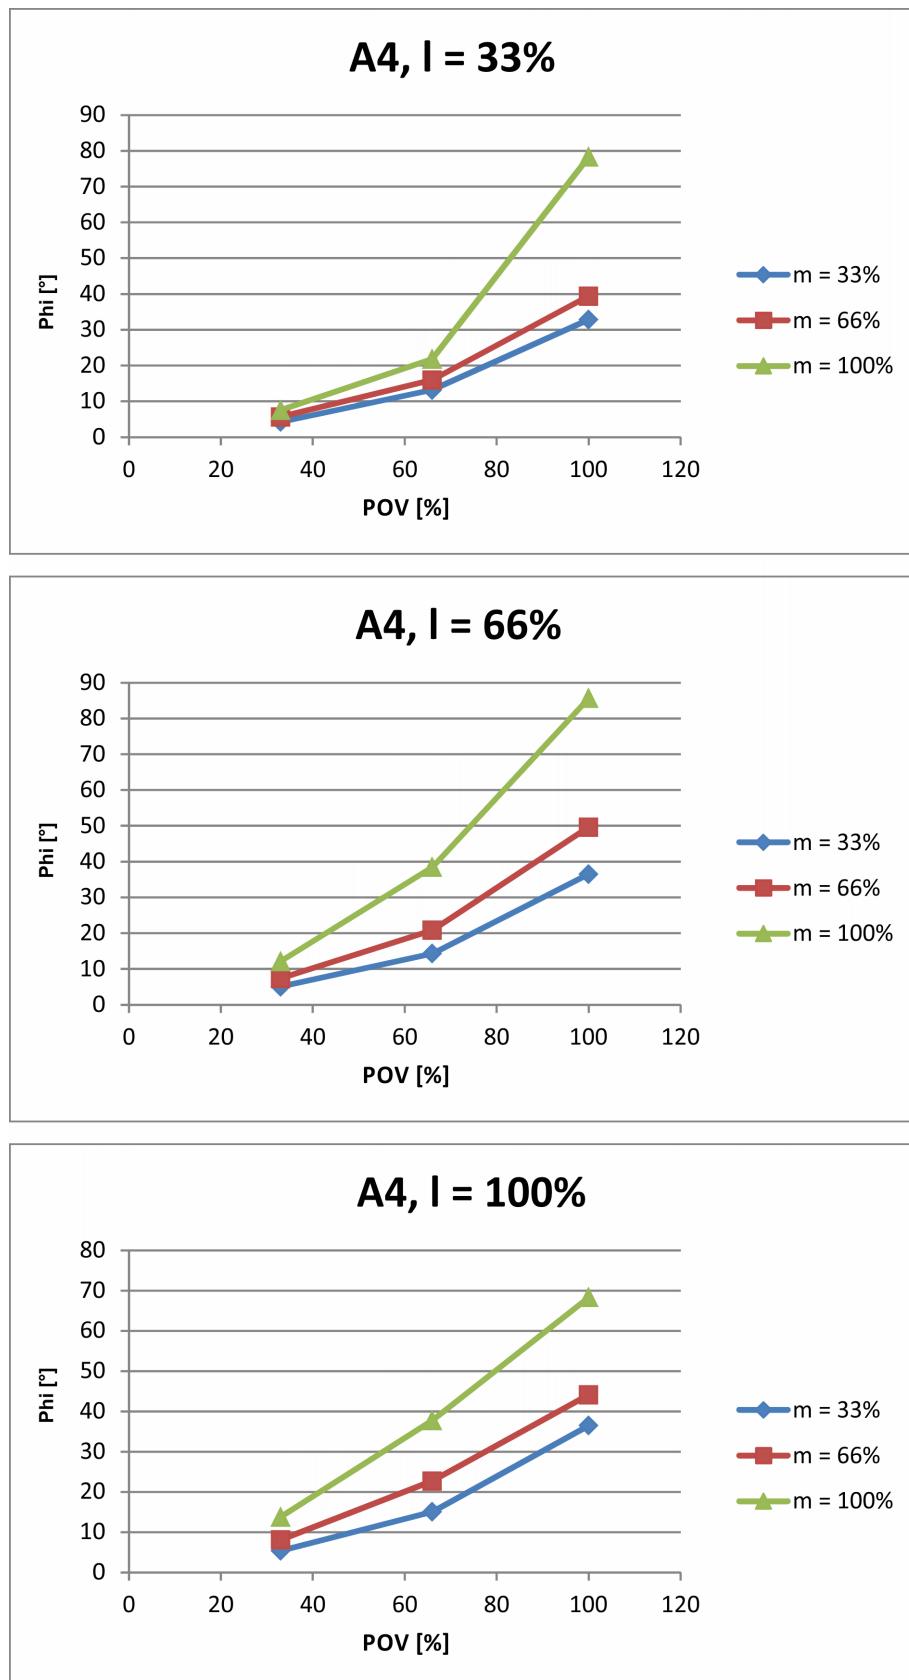


Fig. 4-24: Stopping distances for STOP 1, axis 4

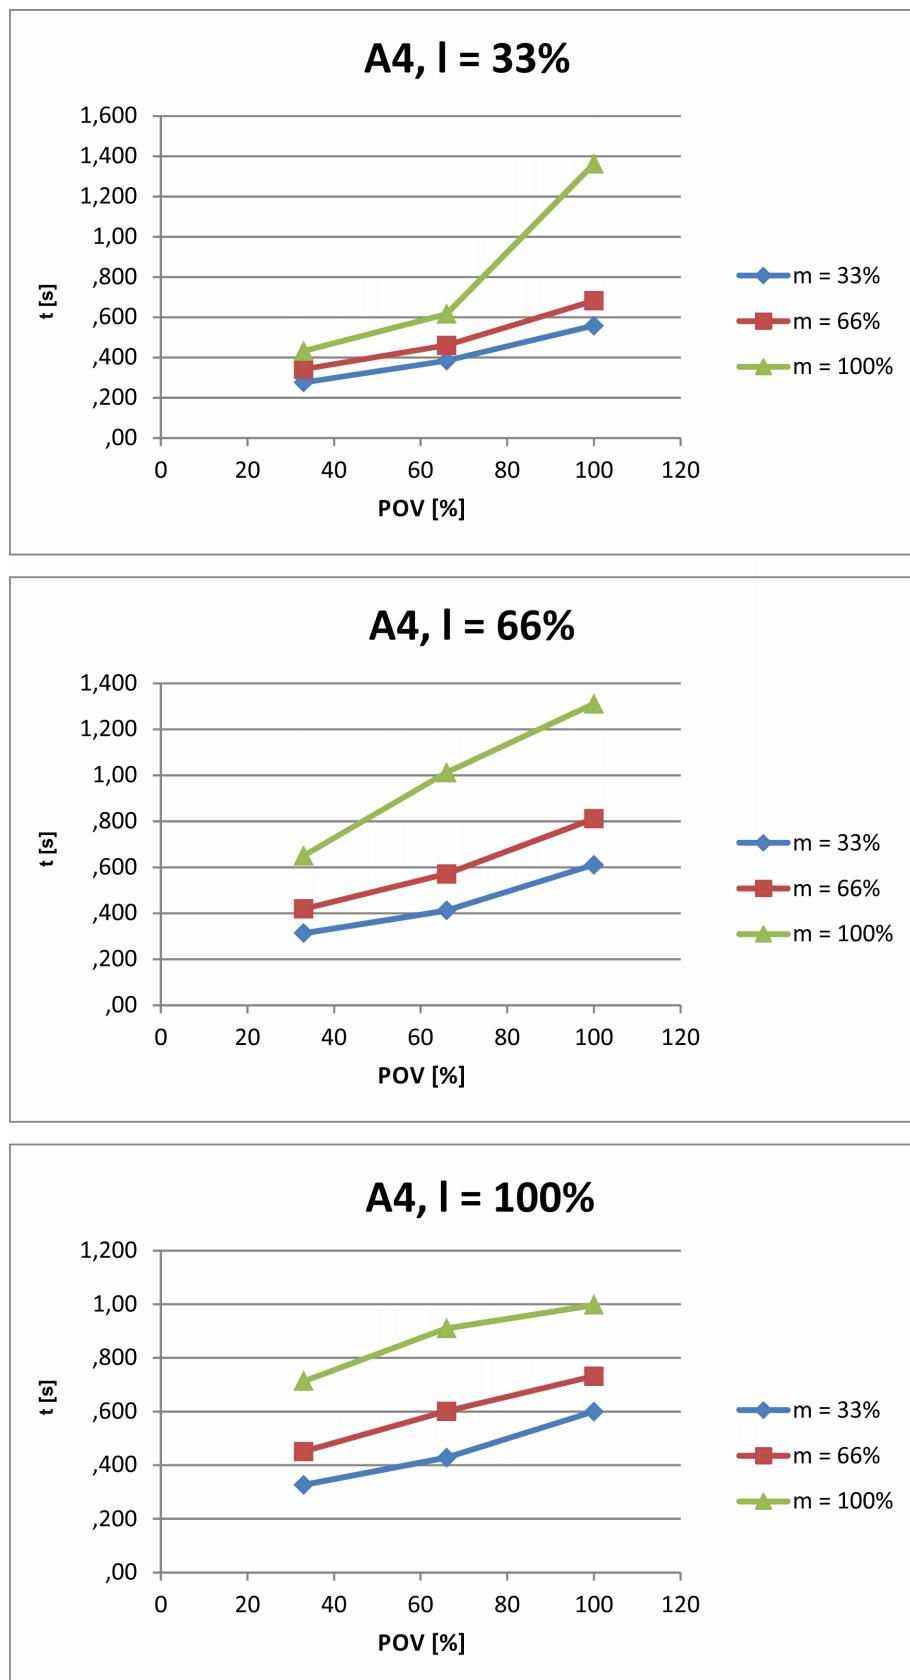


Fig. 4-25: Stopping times for STOP 1, axis 4

4.5.4**Stopping distances and stopping times for LBR iiwa 14 R820**

The stopping distances and stopping times indicated apply to the following media flange:

- Basic flange



The stopping distances and times of other media flanges are specified in the media flange assembly and operating instructions.

4.5.4.1 Stopping distances and stopping times for STOP 0, axis 1 to axis 4

The table shows the stopping distances and stopping times after a STOP 0 (category 0 stop) is triggered. The values refer to the following configuration:

- Extension l = 100%
- Program override POV = 100%
- Mass m = maximum load (rated load + supplementary load on arm)

	Stopping distance (°)	Stopping time (s)
Axis 1	5.742	0.188
Axis 2	5.998	0.200
Axis 3	9.323	0.198
Axis 4	3.162	0.092

4.5.4.2 Stopping distances and stopping times for STOP 1, axis 1

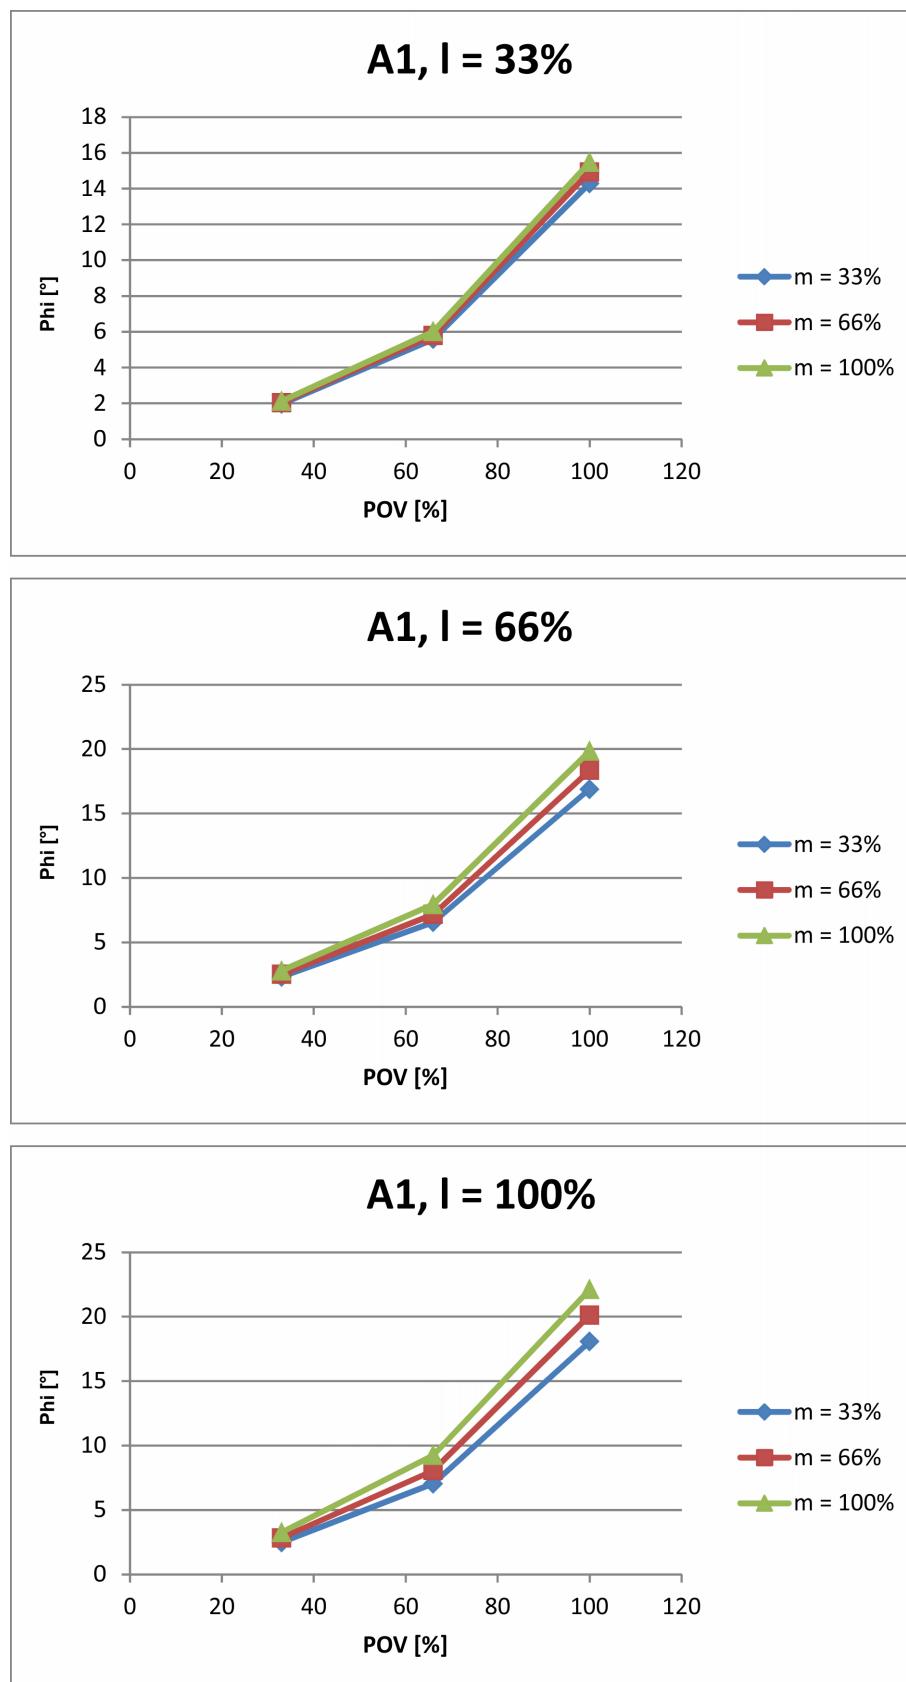


Fig. 4-26: Stopping distances for STOP 1, axis 1

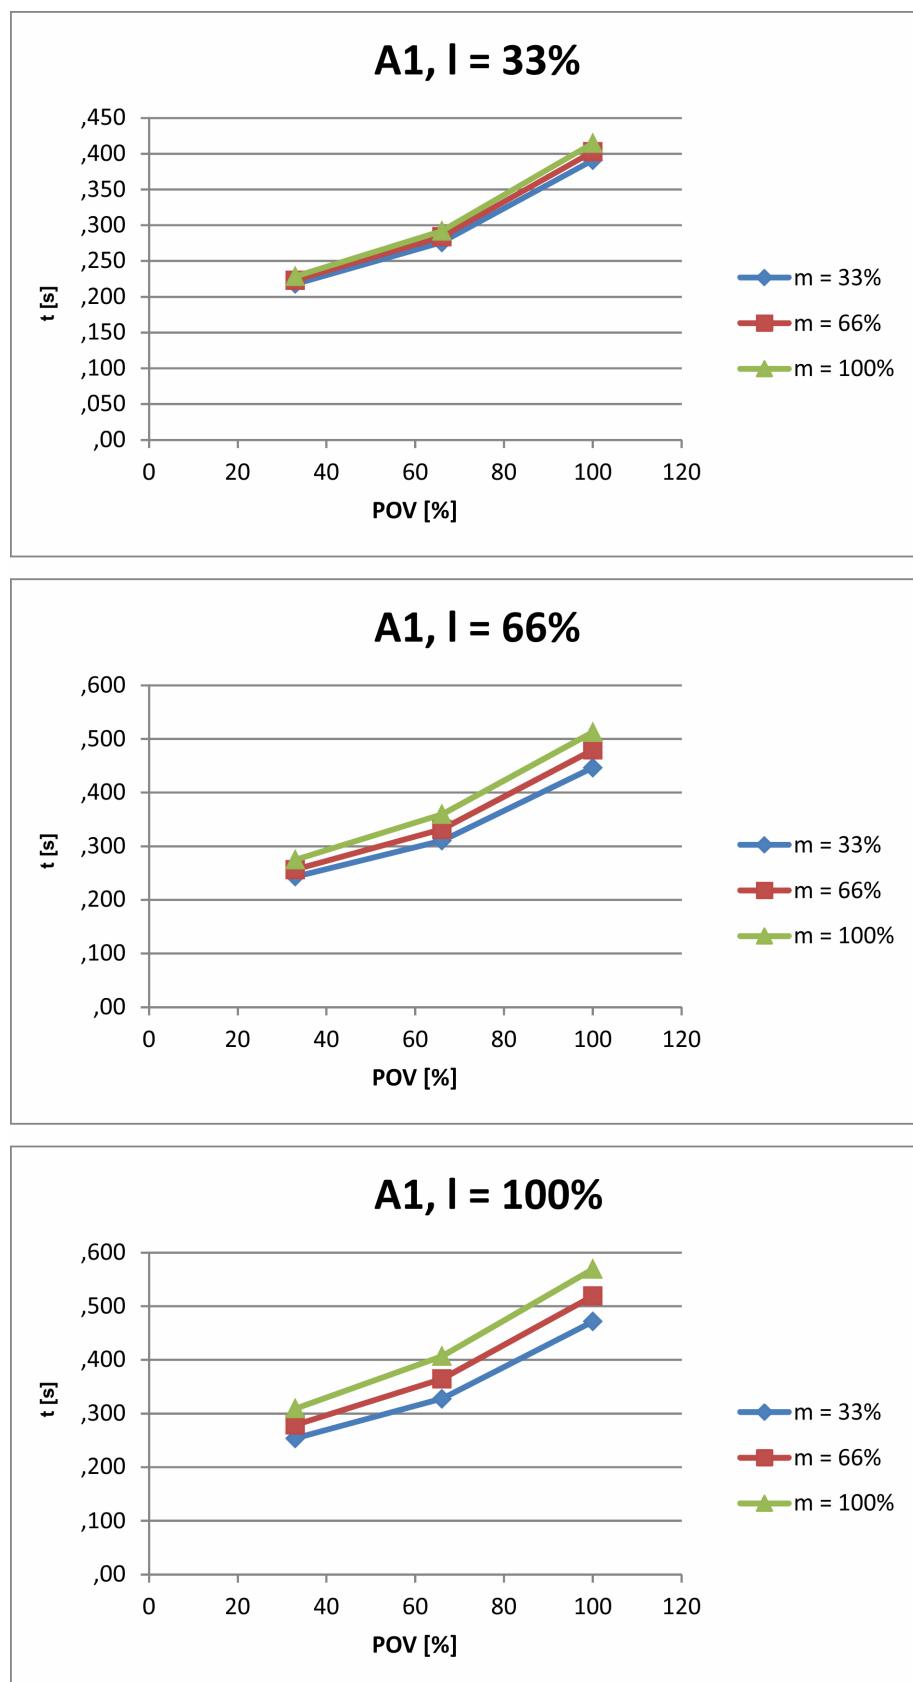


Fig. 4-27: Stopping times for STOP 1, axis 1

4.5.4.3 Stopping distances and stopping times for STOP 1, axis 2

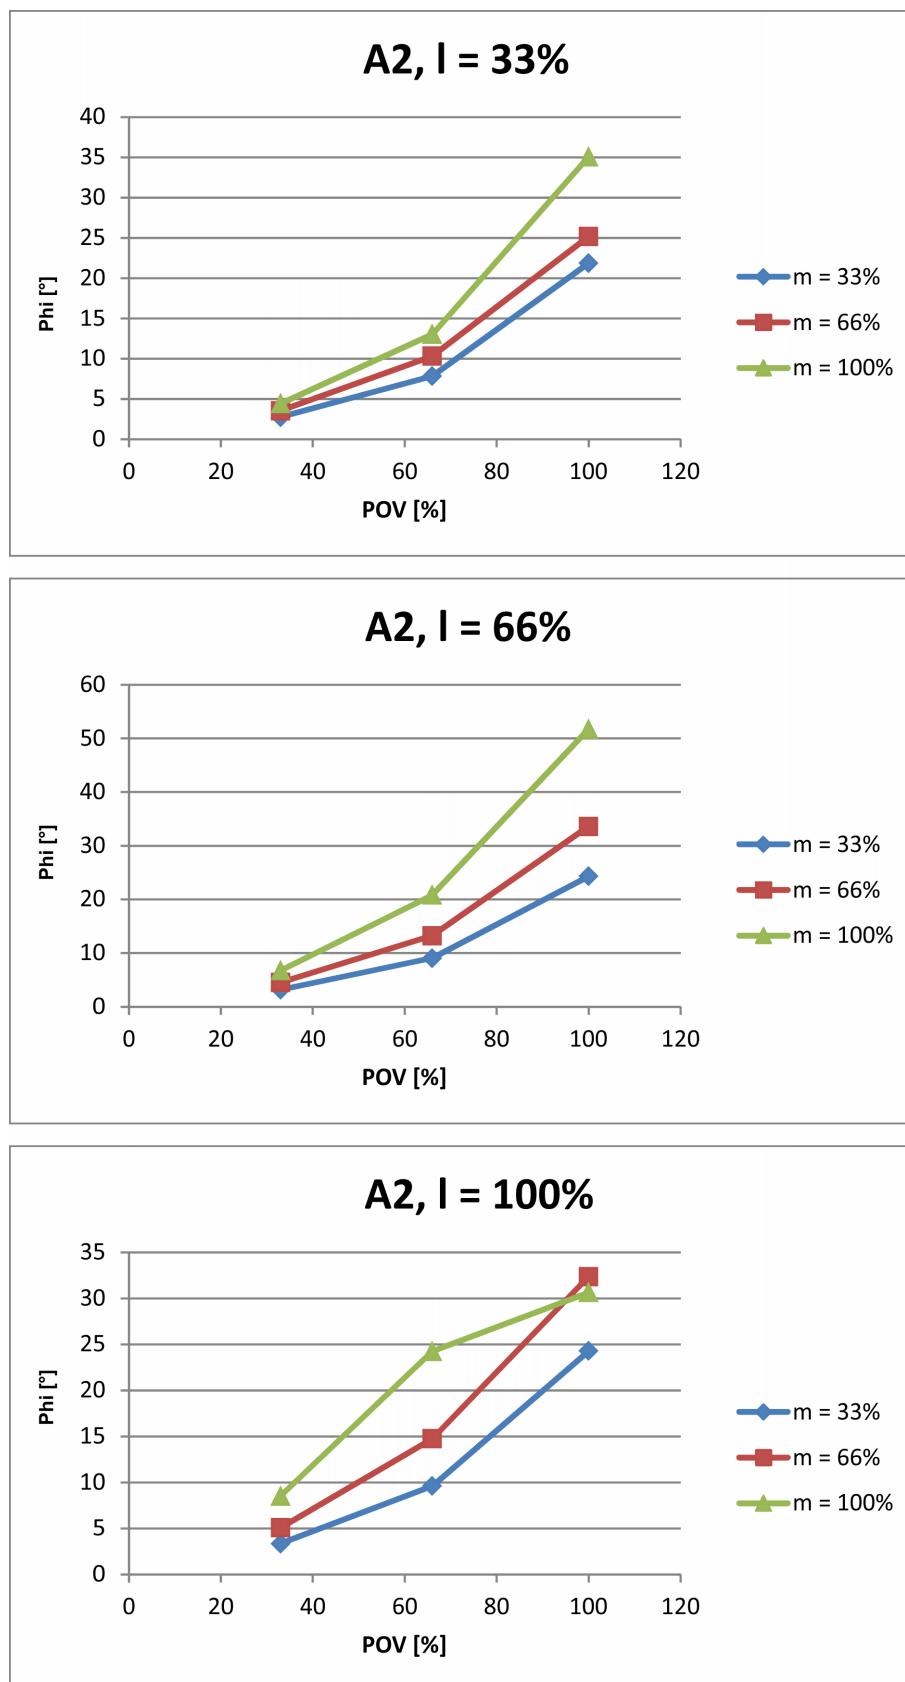


Fig. 4-28: Stopping distances for STOP 1, axis 2

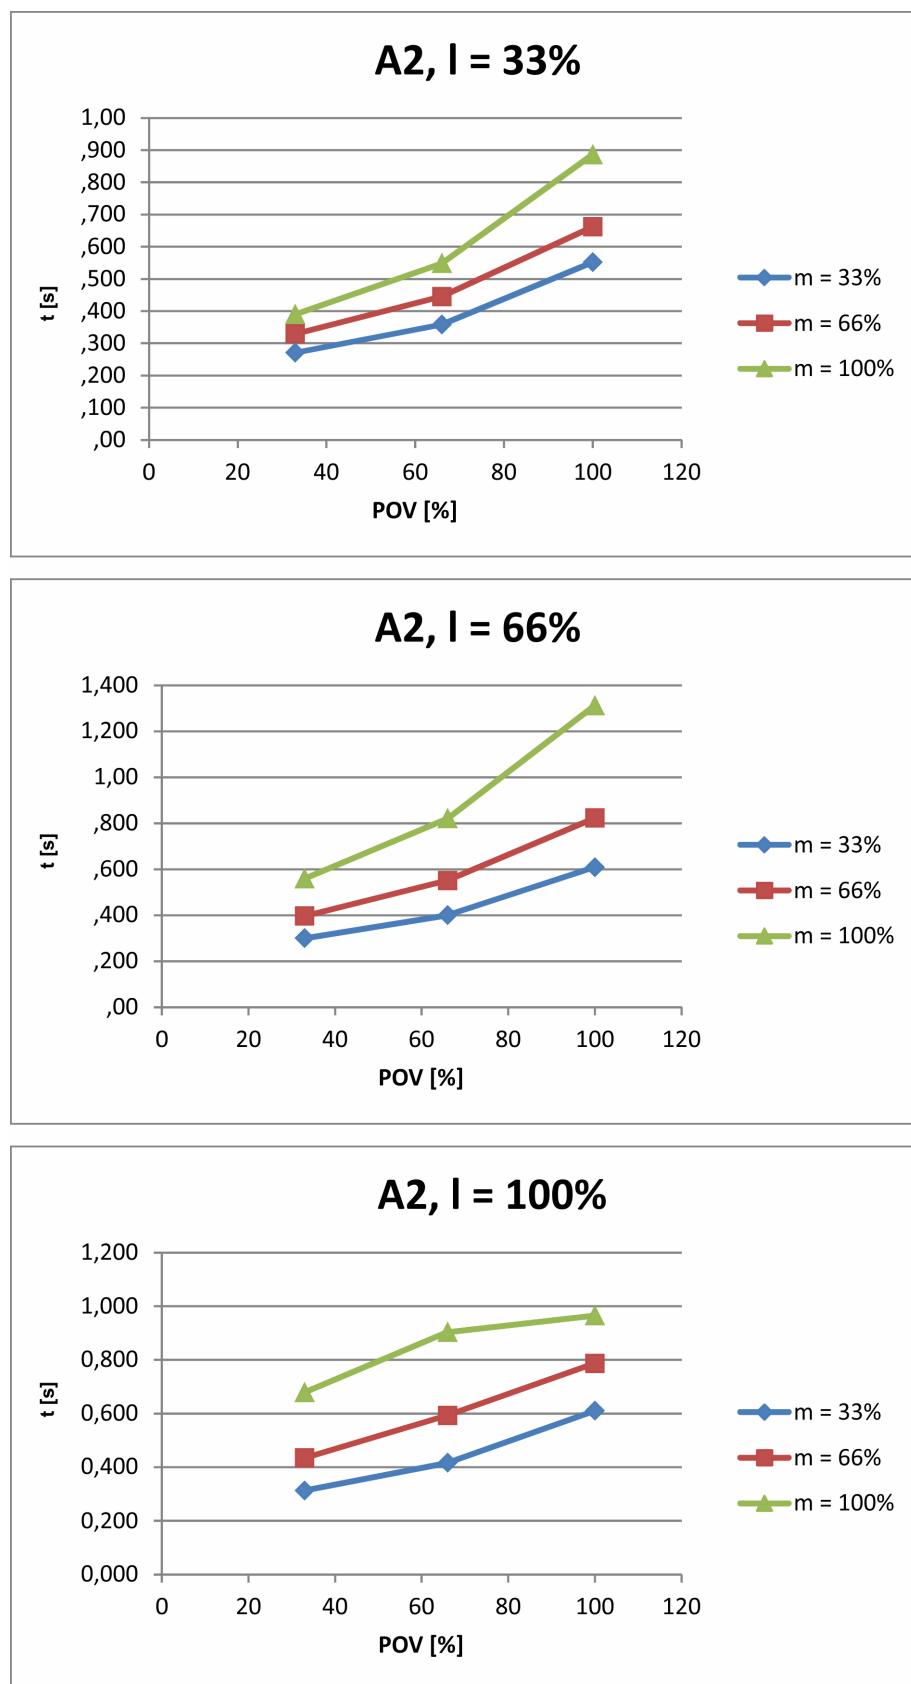


Fig. 4-29: Stopping times for STOP 1, axis 2

4.5.4.4 Stopping distances and stopping times for STOP 1, axis 3

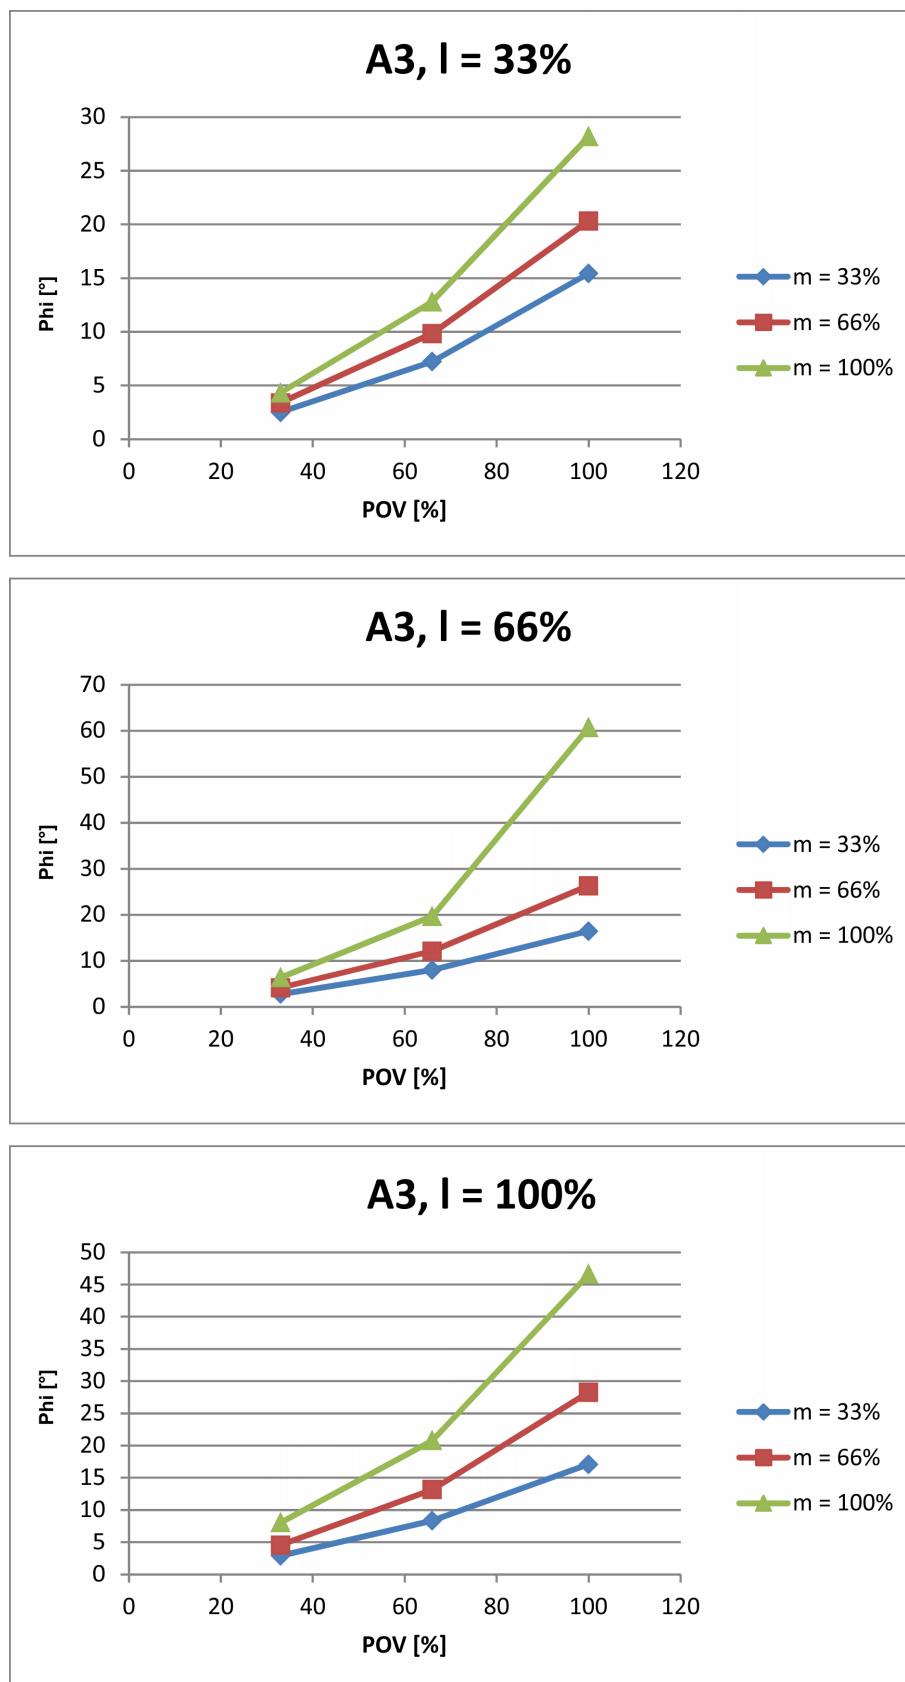


Fig. 4-30: Stopping distances for STOP 1, axis 3

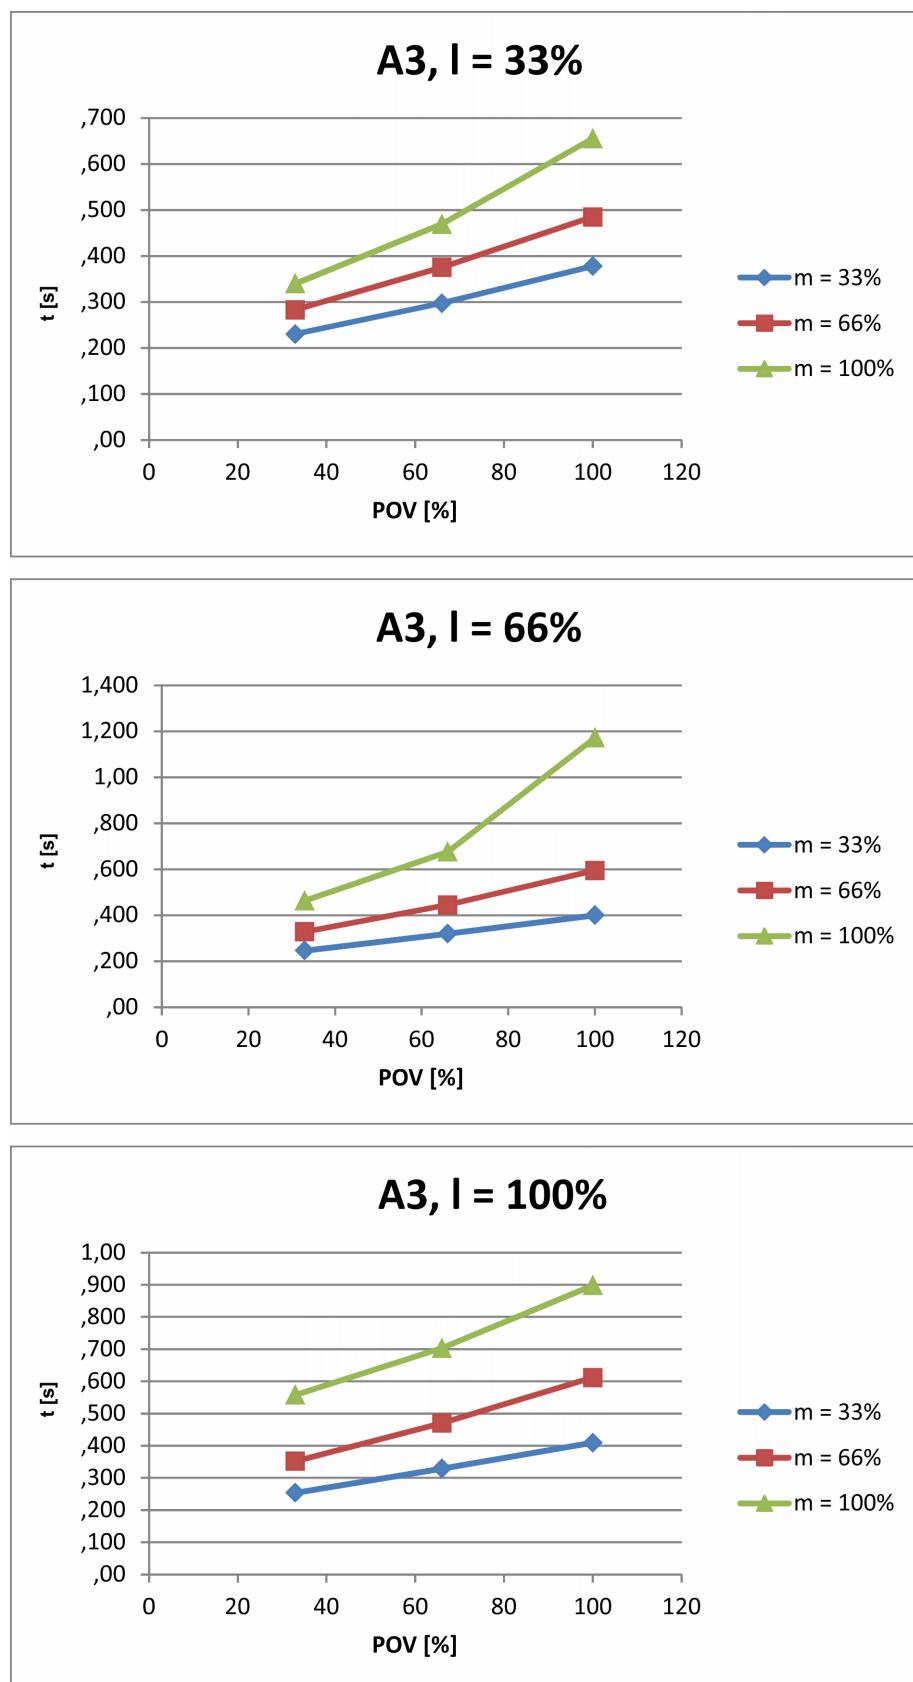


Fig. 4-31: Stopping times for STOP 1, axis 3

4.5.4.5 Stopping distances and stopping times for STOP 1, axis 4

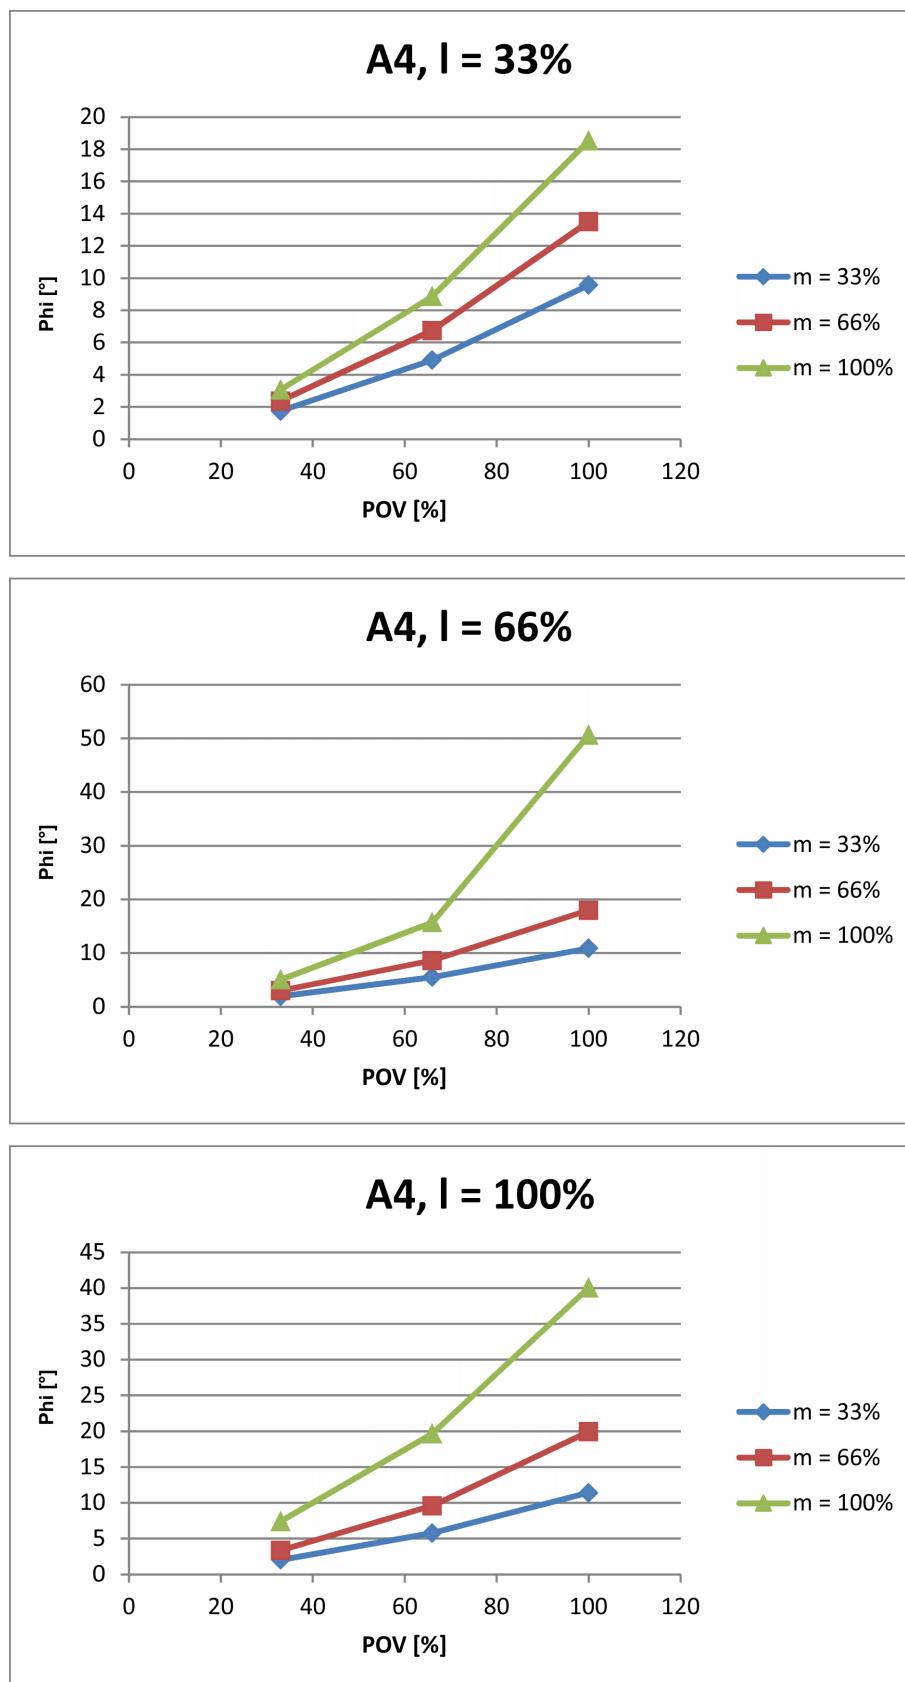


Fig. 4-32: Stopping distances for STOP 1, axis 4

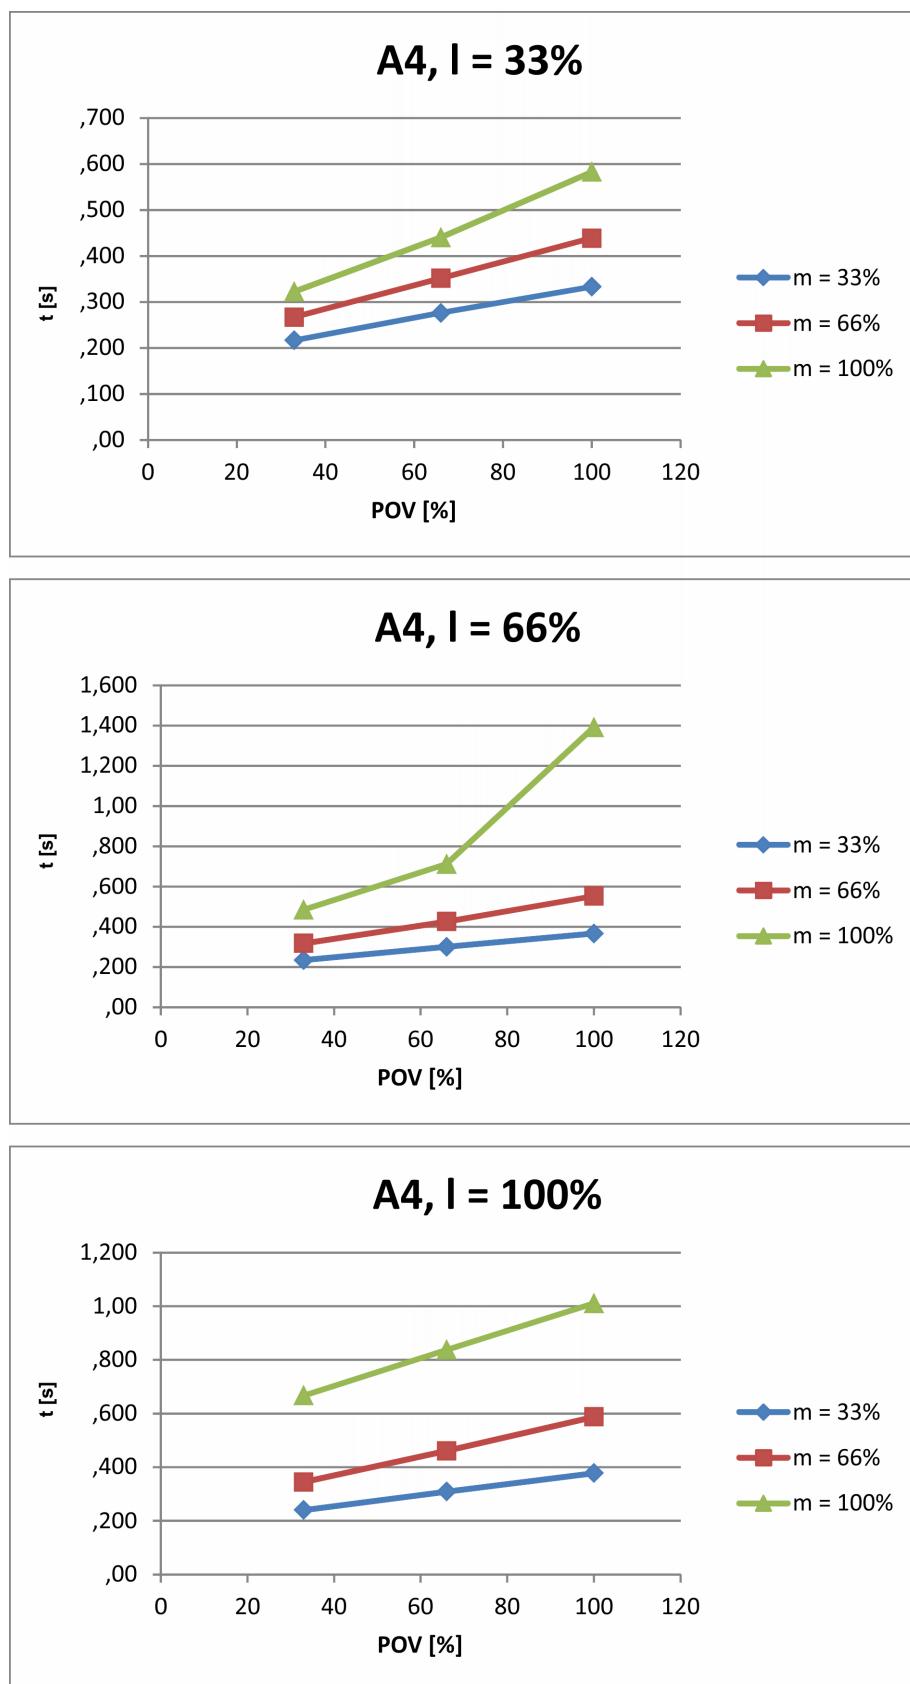


Fig. 4-33: Stopping times for STOP 1, axis 4

5 Safety

5.1 Legal framework

5.1.1 Liability

The device described in this document is either an industrial robot or a component thereof.

Components of the industrial robot:

- Manipulator
- Robot controller
- Hand-held control panel
- Connecting cables
- Software
- Options, accessories

The industrial robot is built using state-of-the-art technology and in accordance with the recognized safety rules. Nevertheless, misuse of the industrial robot may constitute a risk to life and limb or cause damage to the industrial robot and to other material property.

The industrial robot may only be used in perfect technical condition in accordance with its designated use and only by safety-conscious persons who are fully aware of the risks involved in its operation. Use of the industrial robot is subject to compliance with this document and with the declaration of incorporation supplied together with the industrial robot. Any functional disorders affecting safety must be rectified immediately.

Safety information

Information about safety may not be construed against KUKA Deutschland GmbH. Even if all safety instructions are followed, this is not a guarantee that the industrial robot will not cause personal injuries or material damage.

No modifications may be carried out to the industrial robot without the authorization of KUKA Deutschland GmbH. Unauthorized modifications will result in the loss of warranty and liability claims.

Additional components (tools, software, etc.), not supplied by KUKA Deutschland GmbH, may be integrated into the industrial robot. The user is liable for any damage these components may cause to the industrial robot or to other material property.

In addition to the Safety chapter, this document contains further safety instructions. These must also be observed.

5.1.2 Intended use of the industrial robot

The industrial robot is intended exclusively for the use designated in the "Purpose" chapter of the operating instructions or assembly instructions.

Any use or application deviating from the intended use is deemed to be misuse and is not allowed. It will result in the loss of warranty and liability claims.

Operation of the industrial robot in accordance with its intended use also requires compliance with the operating and assembly instructions for the individual components, with particular reference to the maintenance specifications.

The user is responsible for carrying out a risk assessment. This indicates the additional safety equipment that is required, the installation of which is also the responsibility of the user.

Misuse

Any use or application deviating from the intended use is deemed to be misuse and is not allowed. This includes e.g.:

- Use as a climbing aid
- Operation outside the specified operating parameters
- Operation without the required safety equipment

5.1.3 EC declaration of conformity and declaration of incorporation

The industrial robot constitutes partly completed machinery as defined by the EC Machinery Directive. The industrial robot may only be put into operation if the following preconditions are met:

- The industrial robot is integrated into a complete system.
or: The industrial robot, together with other machinery, constitutes a complete system.
or: All safety functions and safeguards required for operation in the complete machine as defined by the EC Machinery Directive have been added to the industrial robot.
- The complete system complies with the EC Machinery Directive. This has been confirmed by means of a conformity assessment procedure.

EC declaration of conformity

The system integrator must issue an EC declaration of conformity for the complete system in accordance with the Machinery Directive. The EC declaration of conformity forms the basis for the CE mark for the system. The industrial robot must always be operated in accordance with the applicable national laws, regulations and standards.

The robot controller has a CE mark in accordance with the EMC Directive and the Low Voltage Directive.

Declaration of incorporation

The partly completed machinery is supplied with a declaration of incorporation in accordance with Annex II B of the Machinery Directive 2006/42/EC. The assembly instructions and a list of essential requirements complied with in accordance with Annex I are integral parts of this declaration of incorporation.

The declaration of incorporation declares that the start-up of the partly completed machinery is not allowed until the partly completed machinery has been incorporated into machinery, or has been assembled with other parts to form machinery, and this machinery complies with the terms of the EC Machinery Directive, and the EC declaration of conformity is present in accordance with Annex II A.

5.2 Safety functions

Safety functions are distinguished according to the safety requirements that they fulfill:

- Safety-oriented functions for the protection of personnel
- The safety-oriented functions of the industrial robot meet the following safety requirements:
- **Category 3 and Performance Level d** in accordance with EN ISO 13849-1
 - **SIL 2** according to EN 62061

The requirements are only met on the following condition, however:

- All safety-relevant mechanical and electromechanical components of the industrial robot are tested for correct functioning during start-up and at least once every 12 months, unless otherwise determined in accordance with a workplace risk assessment. These include:
 - Local EMERGENCY STOP device on the teach pendant
 - Enabling device on the teach pendant
 - Enabling device on the hand guiding device (if present)
 - External enabling devices (if present)
 - Keyswitch on the smartPAD (if used as teach pendant)
 - Safety-oriented outputs of the discrete safety interface



Details about safety parameters (e.g. PFH, SIL, Performance Level) are also available as a SISTEMA library. The library can be downloaded from the KUKA website.

- Non-safety-oriented functions for the protection of machines
- The non-safety-oriented functions of the industrial robot do not meet specific safety requirements:



DANGER

In the absence of the required operational safety functions and safeguards, the industrial robot can cause personal injury or material damage. If the required safety functions or safeguards are dismantled or deactivated, the industrial robot may not be operated.



During system planning, the safety functions of the overall system must also be planned and designed. The industrial robot must be integrated into this safety system of the overall system.

5.2.1 Terms used

Term	Description
Axis range	Range within which the axis may move. The axis range must be defined for each axis.
Stopping distance	Stopping distance = reaction distance + braking distance The stopping distance is part of the danger zone.
Workspace	The manipulator is allowed to move within its workspace. The workspace is derived from the individual axis ranges.
Automatic (AUT)	Operating mode for program execution. The manipulator moves at the programmed velocity.
Operator (User)	The user of the industrial robot can be the management, employer or delegated person responsible for use of the industrial robot.

Term	Description
Danger zone	The danger zone consists of the workspace and the stopping distances.
Service life	<p>The service life of a safety-relevant component begins at the time of delivery of the component to the customer.</p> <p>The service life is not affected by whether the component is used in a robot controller or elsewhere or not, as safety-relevant components are also subject to aging during storage.</p>
CRR	<p>Controlled Robot Retraction</p> <p>CRR is an operating mode which can be selected when the industrial robot is stopped by the safety controller for one of the following reasons:</p> <ul style="list-style-type: none"> • Industrial robot violates an axis-specific or Cartesian monitoring space. • Orientation of a safety-oriented tool is outside the monitored range. • Industrial robot violates a force or axis torque monitoring function. • A position sensor is not mastered or referenced. • An axis torque sensor is not referenced. <p>After changing to CRR mode, the industrial robot may once again be moved.</p>
KUKA smartPAD	see "smartPAD"
Manipulator	The robot arm and the associated electrical installations
Safety zone	The manipulator is not allowed to move within the safety zone. The safety zone is the area outside the danger zone.
Safety stop	<p>The safety stop is triggered by the safety controller, interrupts the work procedure and causes all robot motions to come to a standstill. The program data are retained in the case of a safety stop and the program can be resumed from the point of interruption.</p> <p>The safety stop can be executed as a Stop category 0, Stop category 1 or Stop category 1 (path-maintaining).</p> <p>Note: In this document, a safety stop of Stop category 0 is referred to as safety stop 0, a safety stop of Stop category 1 as safety stop 1 and a safety stop of Stop category 1 (path-maintaining) as safety stop 1 (path-maintaining).</p>
smartPAD	The smartPAD is the hand-held control panel for the robot cell (station). It has all the operator control and display functions required for operation of the station.
Stop category 0	The drives are deactivated immediately and the brakes are applied.
Stop category 1	<p>The manipulator is braked and does not stay on the programmed path. The manipulator is brought to a standstill with the drives. As soon as an axis is at a standstill, the drive is switched off and the brake is applied.</p> <p>The internal electronic drive system of the robot performs safety-oriented monitoring of the braking process. Stop category 0 is executed in the event of a fault.</p> <p>Note: Stop category 1 is currently only supported by the LBR iiwa. For other manipulators, Stop category 0 is executed.</p>

Term	Description
Stop category 1 (path-maintaining)	The manipulator is braked and stays on the programmed path. At standstill, the drives are deactivated and the brakes are applied. If Stop category 1 (path-maintaining) is triggered by the safety controller, the safety controller monitors the braking process. The brakes are applied and the drives are switched off after 1 s at the latest. Stop category 1 is executed in the event of a fault.
System integrator (plant integrator)	System integrators are people who safely integrate the industrial robot into a complete system and commission it.
T1	Test mode, Manual Reduced Velocity (<= 250 mm/s) Note: With manual guidance in T1, the velocity is not reduced, but rather limited through a safety-oriented velocity monitoring in accordance with the safety configuration. Note: The maximum velocity of 250 mm/s does not apply to a mobile platform.
T2	Test mode, Manual High Velocity (> 250 mm/s permissible)

5.2.2 Personnel

The following persons or groups of persons are defined for the industrial robot:

- User
- Personnel



All persons working with the industrial robot must have read and understood the industrial robot documentation, including the safety chapter.

User

The user must observe the labor laws and regulations. This includes e.g.:

- The user must comply with his monitoring obligations.
- The user must carry out briefing at defined intervals.

Personnel

Personnel must be instructed, before any work is commenced, in the type of work involved and what exactly it entails as well as any hazards which may exist. Instruction must be carried out regularly. Instruction is also required after particular incidents or technical modifications.

Personnel includes:

- System integrator
- Operators, subdivided into:
 - Start-up, maintenance and service personnel
 - Operating personnel
 - Cleaning personnel



Installation, exchange, adjustment, operation, maintenance and repair must be performed only as specified in the operating or assembly instructions for the relevant component of the industrial robot and only by personnel specially trained for this purpose.

System integrator

The industrial robot is safely integrated into a complete system by the system integrator.

The system integrator is responsible for the following tasks:

- Installing the industrial robot
- Connecting the industrial robot
- Performing risk assessment
- Implementing the required safety functions and safeguards
- Issuing the EC declaration of conformity
- Attaching the CE mark
- Creating the operating instructions for the system

Operators

The operator must meet the following preconditions:

- The operator must be trained for the work to be carried out.
- Work on the system must only be carried out by qualified personnel. These are people who, due to their specialist training, knowledge and experience, and their familiarization with the relevant standards, are able to assess the work to be carried out and detect any potential hazards.



Work on the electrical and mechanical equipment of the manipulator may only be carried out by KUKA Deutschland GmbH.

5.2.3 Workspace, safety zone and danger zone

Working zones are to be restricted to the necessary minimum size in order to prevent danger to persons or the risk of material damage. Safely monitored axis limits that limit the motion range of an axis and are required for personnel protection are configurable.



Further information about configuring safely monitored axis limits is contained in the "Safety configuration" chapter of the operating and programming instructions of the system software for system integrators.

The danger zone consists of the workspace and the stopping distances of the manipulator. In the event of a stop, the manipulator is braked and comes to a stop within the danger zone. The safety zone is the area outside the danger zone.

The danger zone must be protected by means of physical safeguards, e.g. by light barriers, light curtains or safety fences. If there are no physical safeguards present, the requirements for collaborative operation in accordance with EN ISO 10218 must be met. There must be no shearing or crushing hazards at the loading and transfer areas.

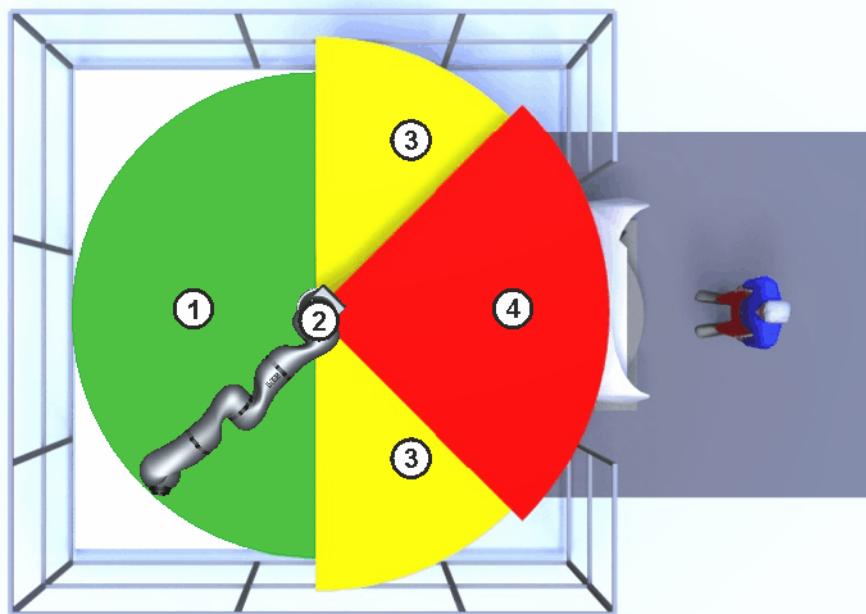


Fig. 5-1: Example: axis range A1

- | | |
|------------------|------------------------|
| 1 Workspace | 3 Stopping distance |
| 2 Manipulator | 4 Safety zone |

5.2.4 Safety-oriented functions

The following safety-oriented functions are present and permanently defined in the industrial robot:

- EMERGENCY STOP device
- Enabling device

The following safety-oriented functions are preconfigured and can be integrated into the system via the safety interface of the robot controller:

- Operator safety (= connection for the monitoring of physical safe-guards)
- External EMERGENCY STOP device
- External safety stop 1 (path-maintaining)

Other safety-oriented functions can also be configured, e.g.:

- External enabling device
- External safe operational stop
- Axis-specific workspace monitoring
- Cartesian workspace monitoring
- Cartesian protected space monitoring
- Velocity monitoring
- Standstill monitoring
- Axis torque monitoring
- Collision detection



Further information about configuring the safety functions is contained in the “Safety configuration” chapter of the operating and programming instructions of the system software for system integrators.

The preconfigured safety functions are described in the following sections on safety.

5.2.4.1 EMERGENCY STOP device

As standard, the EMERGENCY STOP device of the industrial robot is the EMERGENCY STOP device on the smartPAD teach pendant. The EMERGENCY STOP device must be pressed in the event of a hazardous situation or emergency.

Reaction of the industrial robot if the EMERGENCY STOP device is pressed:

- The manipulator stops with a safety stop 1 (path-maintaining).

Before operation can be resumed, the EMERGENCY STOP device must be turned to release it.



From KUKA Sunrise.OS 2.4 onwards, the inputs for the local EMERGENCY STOP can be configured, i.e. a different EMERGENCY STOP device can be connected and used for the local EMERGENCY STOP.



WARNING

Tools and other equipment connected to the robot must be integrated into the EMERGENCY STOP circuit on the system side if they could constitute a potential hazard.

Failure to observe this precaution may result in death, severe injuries or considerable damage to property.

If a holder is used for the teach pendant and conceals the EMERGENCY STOP device on the teach pendant, an external EMERGENCY STOP device must be installed that is accessible at all times.

(>>> [5.2.4.4 "External EMERGENCY STOP device" Page 59](#))

5.2.4.2 Enabling device

As standard, the enabling device of the industrial robot is the enabling device on the smartPAD teach pendant.

There are 3 enabling switches installed on the smartPAD. The enabling switches have 3 positions:

- Not pressed
- Center position
- Fully pressed (panic position)

In the test modes and in CRR, the manipulator can only be moved if one of the enabling switches is held in the central position.

- Releasing the enabling switch triggers a safety stop 1 (path-maintaining).
- Fully pressing the enabling switch triggers a safety stop 1 (path-maintaining).



From KUKA Sunrise.OS 2.4 onwards, the inputs of the enabling device for the teach pendant can be configured, i.e. a different teach pendant with enabling device can be connected and used.

If an enabling switch malfunctions (e.g. jams in the center position), the industrial robot can be stopped using one of the following methods:

- Press another enabling switch down fully.
- Actuate the EMERGENCY STOP device.

- Release the Start key.



WARNING

The enabling switches must not be held down by adhesive tape or other means or tampered with in any other way.
Death, injuries or damage to property may result.

5.2.4.3 “Operator safety” signal

The “operator safety” signal is used for monitoring physical safeguards, e.g. safety gates. In the default configuration, T2 and automatic operation are not possible without this signal. Alternatively, the requirements for collaborative operation in accordance with EN ISO 10218 must be met.

Reaction of the industrial robot in the event of a loss of signal during T2 or automatic operation (default configuration):

- The manipulator stops with a safety stop 1 (path-maintaining).

By default, operator safety is not active in the modes T1 (Manual Reduced Velocity) and CRR, i.e. the signal is not evaluated.



WARNING

Following a loss of signal, automatic operation must not be resumed merely by closing the safeguard; the signal for operator safety must first be set by an additional device, e.g. by an acknowledge button. It is the responsibility of the system integrator to ensure this. This is to prevent automatic operation from being resumed inadvertently while there are still persons in the danger zone, e.g. due to the safety gate closing accidentally.

- This additional device must be designed in such a way that an actual check of the danger zone can be carried out first. Devices that do not allow this (e.g. because they are automatically triggered by closure of the safeguard) are not permitted.
- Failure to observe this may result in death to persons, severe injuries or considerable damage to property.

5.2.4.4 External EMERGENCY STOP device

Every operator station that can initiate a robot motion or other potentially hazardous situation must be equipped with an EMERGENCY STOP device. The system integrator is responsible for ensuring this.

Reaction of the industrial robot if the external EMERGENCY STOP device is pressed (default configuration):

- The manipulator stops with a safety stop 1 (path-maintaining).

External EMERGENCY STOP devices are connected via the safety interface of the robot controller. External EMERGENCY STOP devices are not included in the scope of supply of the industrial robot.

5.2.4.5 External safety stop 1 (path-maintaining)

The external safety stop 1 (path-maintaining) can be triggered via an input on the safety interface (default configuration). The state is maintained as long as the external signal is FALSE. If the external signal is TRUE, the manipulator can be moved again. No acknowledgement is required.

5.2.4.6 External enabling device

External enabling devices are required if it is necessary for more than one person to be in the danger zone of the industrial robot.

Multiple external enabling devices can be connected via the safety interface of the robot controller. External enabling devices are not included in the scope of supply of the industrial robot.

An external enabling device can be used for manual guidance of the robot. When enabling is active, the robot may only be moved at reduced velocity.

For manual guidance, safety-oriented velocity monitoring with a maximum permissible velocity of 250 mm/s is preconfigured. The maximum permissible velocity can be adapted.

The value for the maximum permissible velocity must be determined as part of a risk assessment.

5.2.4.7 External safe operational stop

The safe operational stop is a standstill monitoring function. It does not stop the robot motion, but monitors whether the robot axes are stationary.

The safe operational stop can be triggered via an input on the safety interface. The state is maintained as long as the external signal is FALSE. If the external signal is TRUE, the manipulator can be moved again. No acknowledgement is required.

5.2.5 Triggers for safety-oriented stop reactions

Stop reactions are triggered in response to operator actions or as a reaction to monitoring functions and errors. The following tables show the different stop reactions according to the operating mode that has been set.

Overview

In KUKA Sunrise a distinction is made between the following triggers:

- Permanently defined triggers

Permanently defined triggers for stop reactions and the associated stop category are preset by the system and cannot be changed. However, it is possible for the implemented stop reaction to be stepped up in the user-specific safety configuration.

- User-specific triggers

In addition to the permanently defined triggers, the user can also configure other triggers for stop reactions including the associated stop category.



Further information about configuring the safety functions is contained in the “Safety configuration” chapter of the operating and programming instructions of the system software for system integrators.

Permanently defined triggers

The following triggers for stop reactions are permanently defined:

Trigger	T1, T2, CRR	AUT
Operating mode changed during operation	Safety stop 1 (path-maintaining)	
Enabling switch released	Safety stop 1 (path-maintaining)	-
Enabling switch pressed fully down (panic position)	Safety stop 1 (path-maintaining)	-
Local E-STOP pressed	Safety stop 1 (path-maintaining)	
Error in safety controller	Safety stop 1	

User-specific triggers

When creating a new Sunrise project, the system automatically generates a project-specific safety configuration. This contains the following user-specific stop reaction triggers preconfigured by KUKA (in addition to the permanently defined triggers):

Trigger	T1, CRR	T2, AUT
Safety gate opened (operator safety)	-	Safety stop 1 (path-maintaining)
External E-STOP pressed	Safety stop 1 (path-maintaining)	
External safety stop	Safety stop 1 (path-maintaining)	



This default safety configuration is valid for the system software without additionally installed option packages or catalog elements. If additional option packages or catalog elements have been installed, the default safety configuration may be modified.

Triggers for manual guidance

If an enabling device is configured for manual guidance, the following additional triggers for stop reactions are permanently defined:

Trigger	T1, CRR	T2, AUT
Manual guidance enabling switch released	Safety stop 1 (path-maintaining)	-
Manual guidance enabling switch pressed fully down (panic position)	Safety stop 1 (path-maintaining)	-
Maximum permissible velocity exceeded while manual guidance enabling signal is set	Safety stop 1 (path-maintaining)	

A maximum permissible velocity of 250 mm/s is preconfigured for manual guidance. The maximum permissible velocity can be adapted.

The value for the maximum permissible velocity must be determined as part of a risk assessment.

5.2.6 Non-safety-oriented functions

5.2.6.1 Mode selection

The industrial robot can be operated in the following modes:

- Manual Reduced Velocity (T1)

- Manual High Velocity (T2)
- Automatic (AUT)
- Controlled robot retraction (CRR)

Operating mode	Use	Velocities
T1	Programming, teaching and testing of programs.	<ul style="list-style-type: none"> • Program verification: Reduced programmed velocity, maximum 250 mm/s • Jog mode: Jog velocity, maximum 250 mm/s • Manual guidance: No limitation of the velocity, but safety-oriented velocity monitoring in accordance with the safety configuration <p>Note: The maximum velocity of 250 mm/s does not apply to a mobile platform.</p>
T2	Testing of programs	<ul style="list-style-type: none"> • Program verification: Programmed velocity • Jog mode: Not possible
AUT	Automatic execution of programs For industrial robots with and without higher-level controllers	<ul style="list-style-type: none"> • Program operation: Programmed velocity • Jog mode: Not possible
CRR	<p>CRR is an operating mode which can be selected when the industrial robot is stopped by the safety controller for one of the following reasons:</p> <ul style="list-style-type: none"> • Industrial robot violates an axis-specific or Cartesian monitoring space. • Orientation of a safety-oriented tool is outside the monitored range. • Industrial robot violates a force or axis torque monitoring function. • A position sensor is not mastered or referenced. • An axis torque sensor is not referenced. <p>After changing to CRR mode, the industrial robot may once again be moved.</p>	<ul style="list-style-type: none"> • Program verification: Reduced programmed velocity, maximum 250 mm/s • Jog mode: Jog velocity, maximum 250 mm/s • Manual guidance: No limitation of the velocity, but safety-oriented velocity monitoring in accordance with the safety configuration

5.2.6.2 Velocity monitoring in T1

The reduced velocity in T1 does not constitute a safety-rated reduced speed in the standard safety configuration, i.e. the maximum permissible velocity of 250 mm/s in T1 is not subjected to safety-oriented monitoring.

If the application requires safety-oriented velocity monitoring in T1, this can be added in the safety configuration. The safety option KUKA Sun-

rise.SafeOperation provides the monitoring function *Cartesian velocity monitoring* for this purpose.



Further information about configuring safety-oriented velocity monitoring for T1 is contained in the “Safety configuration” chapter of the operating and programming instructions of the system software for system integrators.

5.2.6.3 Software limit switches

The axis ranges of all manipulator axes are limited by means of non-safety-oriented software limit switches. These software limit switches only serve as machine protection and are preset in such a way that the manipulator is stopped under servo control if the axis limit is exceeded, thereby preventing damage to the mechanical equipment.

5.3 Additional protective equipment

5.3.1 Jog mode

In the operating modes T1 (Manual Reduced Velocity), T2 (Manual High Velocity) and CRR, the robot controller can only execute programs in jog mode. This means that it is necessary to hold down an enabling switch and the Start key in order to execute a program.

- Releasing the enabling switch on the smartPAD triggers a safety stop 1 (path-maintaining).
- Pressing fully down on the enabling switch on the smartPAD triggers a safety stop 1 (path-maintaining).
- Releasing the Start key triggers a stop of Stop category 1 (path-maintaining).

5.3.2 Labeling on the industrial robot

All plates, labels, symbols and marks constitute safety-relevant parts of the industrial robot. They must not be modified or removed.

Labeling on the industrial robot consists of:

- Identification plates
- Warning signs
- Safety symbols
- Designation labels
- Cable markings
- Rating plates



Further information is contained in the technical data of the operating instructions or assembly instructions of the components of the industrial robot.

5.3.3 External safeguards

The access of persons to the danger zone of the industrial robot must be prevented by means of safeguards. Alternatively, the requirements for collaborative operation in accordance with EN ISO 10218 must be met. It is the responsibility of the system integrator to ensure this.

Physical safeguards must meet the following requirements:

- They meet the requirements of EN ISO 14120.
- They prevent access of persons to the danger zone and cannot be easily circumvented.
- They are sufficiently fastened and can withstand all forces that are likely to occur in the course of operation, whether from inside or outside the enclosure.
- They do not, themselves, represent a hazard or potential hazard.
- The prescribed minimum clearance from the danger zone is maintained.

Safety gates (maintenance gates) must meet the following requirements:

- They are reduced to an absolute minimum.
- The interlocks (e.g. safety gate switches) are linked to the configured operator safety inputs of the robot controller.
- Switching devices, switches and the type of switching conform to the requirements of Performance Level d and category 3 according to EN ISO 13849-1.
- Depending on the risk situation: the safety gate is additionally safeguarded by means of a locking mechanism that only allows the gate to be opened if the manipulator is safely at a standstill.
- The device for setting the signal for operator safety, e.g. the button for acknowledging the safety gate, is located outside the space limited by the safeguards.



Further information is contained in the corresponding standards and regulations. These also include EN ISO 14120.

Other safety equipment

Other safety equipment must be integrated into the system in accordance with the corresponding standards and regulations.

5.4 Safety measures

5.4.1 General safety measures

The industrial robot may only be used in perfect technical condition in accordance with its intended use and only by safety-conscious persons. Operator errors can result in personal injury and damage to property.

It is important to be prepared for possible movements of the industrial robot even after the robot controller has been switched off and locked out. Incorrect installation (e.g. overload) or mechanical defects (e.g. brake defect) can cause the manipulator to sag. If work is to be carried out on a switched-off industrial robot, the manipulator must first be moved into a position in which it is unable to move on its own, whether the payload is mounted or not. If this is not possible, the manipulator must be secured by appropriate means.



DANGER

In the absence of operational safety functions and safeguards, the industrial robot can cause personal injury or material damage. If safety functions or safeguards are dismantled or deactivated, the industrial robot may not be operated.



WARNING

Standing underneath the robot arm can cause death or serious injuries. Especially if the industrial robot is moving objects that can become detached (e.g. from a gripper). For this reason, standing underneath the robot arm is prohibited!

HRC

In the case of collaborative operation (HRC), the system must be equipped with a visual display indicating when the robot is in collaborative operation.

smartPAD

The user must ensure that the industrial robot is only operated with the smartPAD by authorized persons.

If more than one smartPAD is used in the overall system, it must be ensured that each smartPAD is unambiguously assigned to the corresponding industrial robot. It must be ensured that 2 smartPADs are not interchanged.

The smartPAD can be configured as unpluggable.



WARNING

If the smartPAD is disconnected, the system can no longer be switched off by means of the EMERGENCY STOP device on the smartPAD. If the smartPAD is configured as unpluggable, at least one external EMERGENCY STOP device must be installed that is accessible at all times.

Failure to observe this can lead to death, injury or property damage.



WARNING

The operator must ensure that disconnected smartPADs are immediately removed from the system and stored out of sight and reach of personnel working on the industrial robot. This prevents operational and non-operational EMERGENCY STOP devices from becoming interchanged.

Failure to observe this can lead to death, injury or property damage.

Modifications

After modifications to the industrial robot, checks must be carried out to ensure the required safety level. The valid national or regional work safety regulations must be observed for this check. The correct functioning of all safety functions must also be tested.

New or modified programs must always be tested first in Manual Reduced Velocity mode (T1).

After modifications to the industrial robot, existing programs must always be tested first in Manual Reduced Velocity mode (T1). This applies to all components of the industrial robot and includes modifications to the software and configuration settings.

The robot may not be connected and disconnected when the robot controller is running.

Faults

The following tasks must be carried out in the case of faults in the industrial robot:

- Switch off the robot controller and secure it (e.g. with a padlock) to prevent unauthorized persons from switching it on again.
- Indicate the fault by means of a label with a corresponding warning (tagout).
- Keep a record of the faults.
- Eliminate the fault and carry out a function test.

5.4.2 IT security

The industrial robot may only be used in perfect technical condition in accordance with its intended use and only by safety-conscious persons.

In particular, security-conscious use includes that it be operated in an IT environment which meets the current security-relevant standards and for which there is an overall concept for IT security.



IT security entails not only technical aspects but, at a minimum, also those of organization, personnel and infrastructure.
KUKA urgently recommends that operators implement an information security management system for their products which designs, coordinates and monitors the tasks related to information security.

Sources for information about IT security for companies include:

- Independent consulting firms
- National cyber security authorities

National authorities often make their recommendations available on the Internet. In addition to their official language, some national authorities provide their information in English.

5.4.3 Transportation

Manipulator

The prescribed transport position of the manipulator must be observed. Transportation must be carried out in accordance with the operating instructions or assembly instructions of the robot.

Avoid vibrations and impacts during transportation in order to prevent damage to the manipulator.

Robot controller

The prescribed transport position of the robot controller must be observed. Transportation must be carried out in accordance with the operating instructions or assembly instructions of the robot controller.

Avoid vibrations and impacts during transportation in order to prevent damage to the robot controller.

5.4.4 Start-up and recommissioning

Before starting up systems and devices for the first time, a check must be carried out to ensure that the systems and devices are complete and operational, that they can be operated safely and that any damage is detected.

The valid national or regional work safety regulations must be observed for this check. The correct functioning of all safety functions must also be tested.



Prior to start-up, the passwords for the user groups must be modified by the administrator, transferred to the robot controller in an installation procedure and activated. The passwords must only be communicated to authorized personnel.



DANGER

The robot controller is preconfigured for the specific industrial robot. If cables are interchanged, the manipulator may receive incorrect data and can thus cause personal injury or material damage. If a system consists of more than one manipulator, always connect the connecting cables to the manipulators and their corresponding robot controllers.



If additional components (e.g. cables), which are not part of the scope of supply of KUKA Deutschland GmbH, are integrated into the industrial robot, the user is responsible for ensuring that these components do not adversely affect or disable safety functions.

NOTICE

If the internal cabinet temperature of the robot controller differs greatly from the ambient temperature, condensation can form, which may cause damage to the electrical components. Do not put the robot controller into operation until the internal temperature of the cabinet has adjusted to the ambient temperature.

Function test

The following tests must be carried out before start-up and recommissioning:

General test:

It must be ensured that:

- The industrial robot is correctly installed and fastened in accordance with the specifications in the documentation.
- There are no foreign bodies or defective or loose parts on the industrial robot.
- All required safety equipment is correctly installed and operational.
- The power supply ratings of the industrial robot correspond to the local supply voltage and mains type.
- The ground conductor and the equipotential bonding cable are sufficiently rated and correctly connected.
- The connecting cables are correctly connected and the connectors are locked.

Test of the safety functions:

A function test must be carried out for all the safety-oriented functions to ensure that they are working correctly:

Test of the safety-relevant mechanical and electromechanical components:

The following tests must be performed prior to start-up and at least once every 12 months unless otherwise determined in accordance with a workplace risk assessment:

- Function of all connected EMERGENCY STOP devices

Press the EMERGENCY STOP device. A message must be displayed on the teach pendant indicating that the EMERGENCY STOP has been actuated. At the same time, no error message may be displayed about the EMERGENCY STOP device.

- Function of the enabling switches of all connected enabling devices
Move the robot in Test mode and release the enabling switch. The robot motion must be stopped. At the same time, no error message may be displayed on the teach pendant about the enabling device.
The test must always be carried out for all enabling switches of a connected enabling device.
If the state of the enabling device is configured at an output, the test can also be performed via the output.
- Panic function of the enabling switches of all connected enabling devices
Move the robot in Test mode and press the enabling switch down fully. The robot motion must be stopped. At the same time, no error message may be displayed on the teach pendant about the enabling device.
The test must always be carried out for all enabling switches of a connected enabling device.
If the state of the enabling device is configured at an output, the test can also be performed via the output.
- Function of the keyswitch on the smartPAD (if used as teach pendant)
Turn the keyswitch to the right and then back again. There must be no error message displayed on the smartPAD.
- Switch-off capability of the safety-oriented outputs
Switch robot controller off and then on again. After it is switched on, no error message relating to a safety-oriented output may be displayed on the teach pendant.



In the case of incomplete start-up of the system, additional substitute measures for minimizing risk must be taken and documented, e.g. installation of a safety fence, attachment of a warning sign, locking of the main switch. Start-up is incomplete, for example, if not all safety functions have yet been implemented, or if a function test of the safety functions has not yet been carried out.

Test of the functional capability of the brakes:

For the industrial robot, a brake test is available which can be used to check whether the brake of each axis applies sufficient braking torque.

The brake test ensures that any impairment of the braking function is detected, e.g. due to wear, overheating, fouling or damage, thereby eliminating avoidable risks.

The brake test must be performed regularly, unless an application-specific risk assessment has established that a malfunction of the mechanical brakes will not result in inadmissibly high risks. Determination of the interval at which the brake test is to be performed also constitutes part of the risk assessment.

In the absence of a corresponding risk assessment, the following applies:

- The brake test must be carried out for each axis during start-up and recommissioning of the industrial robot.
- The brake test must be performed daily during operation.

5.4.5 Manual mode

General

Manual mode is the mode for setup work. Setup work is all the tasks that have to be carried out on the industrial robot to enable automatic operation. Setup work includes:

- Jog mode
- Teaching
- Program verification

The following must be taken into consideration in manual mode:

- New or modified programs must always be tested first in Manual Reduced Velocity mode (T1).
- The manipulator and its tooling must never touch or project beyond the safety fence.
- Workpieces, tooling and other objects must not become jammed as a result of the industrial robot motion, nor must they lead to short-circuits or be liable to fall off.
- All setup work must be carried out, where possible, from outside the safeguarded area.

Setup work in T1

If it is necessary to carry out setup work from inside the safeguarded area, the following must be taken into consideration in the operating mode **Manual Reduced Velocity (T1)**:

- If it can be avoided, there must be no other persons inside the safeguarded area.

If it is necessary for there to be several persons inside the safeguarded area, the following must be observed:

- Each person must have an enabling device.
- All persons must have an unimpeded view of the industrial robot.
- Eye-contact between all persons must be possible at all times.
- The operator must be so positioned that he can see into the danger area and get out of harm's way.
- Unexpected motions of the manipulator cannot be ruled out, e.g. in the event of a fault. For this reason, an appropriate clearance must be maintained between persons and the manipulator (including tool).

Guide value: 50 cm.

The minimum clearance may vary depending on local circumstances, the motion program and other factors. The minimum clearance that is to apply for the specific application must be decided by the user on the basis of a risk assessment.

Setup work in T2

If it is necessary to carry out setup work from inside the safeguarded area, the following must be taken into consideration in the operating mode **Manual High Velocity (T2)**:

- This mode may only be used if the application requires a test at a velocity higher than that possible in T1 mode.
- Teaching is not permissible in this operating mode.
- Before commencing the test, the operator must ensure that the enabling devices are operational.
- The operator must be positioned outside the danger zone.

- There must be no-one present inside the safeguarded area. It is the responsibility of the operator to ensure this.

5.4.6 Automatic mode

Automatic mode is only permissible in compliance with the following safety measures:

- All safety equipment and safeguards are present and operational.
- There are no persons in the system, or the requirements for collaborative operation in accordance with EN ISO 10218 have been met.
- The defined working procedures are adhered to.

If the manipulator comes to a standstill for no apparent reason, the danger zone must not be entered until an EMERGENCY STOP has been triggered.

5.4.7 Maintenance and repair

After maintenance and repair work, checks must be carried out to ensure the required safety level. The valid national or regional work safety regulations must be observed for this check. The correct functioning of all safety functions must also be tested.

The purpose of maintenance and repair work is to ensure that the system is kept operational or, in the event of a fault, to return the system to an operational state. Repair work includes troubleshooting in addition to the actual repair itself.

The following safety measures must be carried out when working on the industrial robot:

- Carry out work outside the danger zone. If work inside the danger zone is necessary, the user must define additional safety measures to ensure the safe protection of personnel.
- Switch off the industrial robot and secure it (e.g. with a padlock) to prevent it from being switched on again. If it is necessary to carry out work with the robot controller switched on, the user must define additional safety measures to ensure the safe protection of personnel.
- If it is necessary to carry out work with the robot controller switched on, this may only be done in operating mode T1.
- Label the system with a sign indicating that work is in progress. This sign must remain in place, even during temporary interruptions to the work.
- The EMERGENCY STOP devices must remain active. If safety functions or safeguards are deactivated during maintenance or repair work, they must be reactivated immediately after the work is completed.



DANGER

Before work is commenced on live parts of the robot system, the main switch must be turned off and secured against being switched on again. The system must then be checked to ensure that it is deenergized. It is not sufficient, before commencing work on live parts, to execute an EMERGENCY STOP or a safety stop, or to switch off the drives, as this does not disconnect the robot system from the mains power supply. Parts remain energized. Death or severe injuries may result.

Faulty components must be replaced using new components with the same article numbers or equivalent components approved by KUKA Deutschland GmbH for this purpose.

Cleaning and preventive maintenance work is to be carried out in accordance with the operating instructions.

Robot controller

Even when the robot controller is switched off, parts connected to peripheral devices may still carry voltage. The external power sources must therefore be switched off if work is to be carried out on the robot controller.

The ESD regulations must be adhered to when working on components in the robot controller.

Voltages in excess of 60 V can be present in various components for several minutes after the robot controller has been switched off! To prevent life-threatening injuries, no work may be carried out on the industrial robot in this time.

Water and dust must be prevented from entering the robot controller.

5.4.8 Decommissioning, storage and disposal

The industrial robot must be decommissioned, stored and disposed of in accordance with the applicable national laws, regulations and standards.

5.4.9 Safety measures for “single point of control”

Overview

If certain components in the industrial robot are operated, safety measures must be taken to ensure complete implementation of the principle of “single point of control” (SPOC).

Components:

- Tools for configuration of bus systems with online functionality



The implementation of additional safety measures may be required. This must be clarified for each specific application; this is the responsibility of the user of the system.

Since only the system integrator knows the safe states of actuators in the periphery of the robot controller, it is his task to set these actuators to a safe state.

T1, T2, CRR

In modes T1, T2 and CRR, a robot motion can only be initiated if an enabling switch is held down.

Tools for configuration of bus systems

If these components have an online functionality, they can be used with write access to modify programs, outputs or other parameters of the robot controller, without this being noticed by any persons located inside the system.

Such tools include:

- KUKA Sunrise.Workbench
- WorkVisual from KUKA
- Tools from other manufacturers

Safety measure:

- In the test modes, programs, outputs or other parameters of the robot controller must not be modified using these components.

5.5 Applied standards and directives

Name/Edition	Definition
2006/42/EC:2006	Machinery Directive: Directive 2006/42/EC of the European Parliament and of the Council of 17 May 2006 on machinery, and amending Directive 95/16/EC (recast)
2014/30/EU:2014	EMC Directive: Directive 2014/30/EC of the European Parliament and of the Council dated 26 February 2014 on the approximation of the laws of the Member States concerning electromagnetic compatibility
EN ISO 13850:2015	Safety of machinery: Emergency stop - Principles for design
EN ISO 13849-1:2015	Safety of machinery: Safety-related parts of control systems - Part 1: General principles of design
EN ISO 13849-2:2012	Safety of machinery: Safety-related parts of control systems - Part 2: Validation
EN ISO 12100:2010	Safety of machinery: General principles of design, risk assessment and risk reduction
EN ISO 10218-1:2011	Industrial robots – Safety requirements: Part 1: Robots Note: Content equivalent to ANSI/RIA R.15.06-2012, Part 1
EN 614-1:2006+A1:2009	Safety of machinery: Ergonomic design principles - Part 1: Terms and general principles
EN 61000-6-2:2005	Electromagnetic compatibility (EMC): Part 6-2: Generic standards; Immunity for industrial environments
EN 61000-6-4:2007 + A1:2011	Electromagnetic compatibility (EMC): Part 6-4: Generic standards; Emission standard for industrial environments
EN 60204-1:2006/A1:2009	Safety of machinery: Electrical equipment of machines - Part 1: General requirements
EN 62061:2005 + A1:2013 + A2:2015	Safety of machinery: Functional safety of safety-related electrical, electronic and programmable electronic control systems

6 Planning

6.1 Mounting variant

The following mounting variant is available for installing the robot:

- Machine frame mounting with centering (>>> [6.1.1 "Machine frame mounting with centering" Page 73](#))

6.1.1 Machine frame mounting with centering

The machine frame mounting assembly is used when the robot is fastened on a steel structure, a booster frame (pedestal) or a KUKA linear unit. This assembly is also used if the robot is installed on the ceiling. It must be ensured that the substructure is able to withstand safely the forces occurring during operation (foundation loads). The following diagram contains all the necessary information that must be observed when preparing the mounting surface.

The machine frame mounting assembly consists of:

- Locating pins
- Allen screws

Dimensioned drawing

The following illustrations provide all the necessary information on machine frame mounting, together with the required foundation data.

- **LBR iiwa 7 R800**

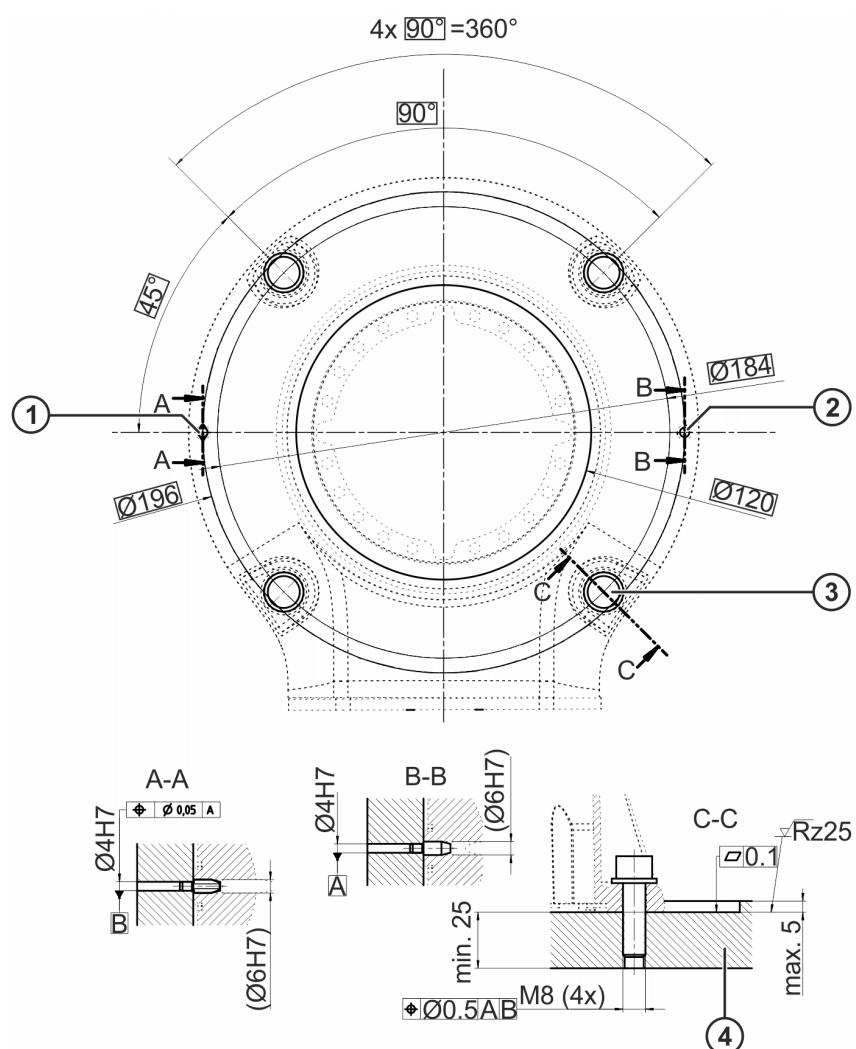


Fig. 6-1: Dimensioned drawing of machine frame mounting, LBR iiwa 7 R800

- 1 Flat-sided locating pin, 6x12
Locating hole 6H7
- 2 Cylindrical locating pin, 6x12
Locating hole 6H7
- 3 M8x30-8.8 Allen screw (4x) with washer
- 4 Steel structure

- **LBR iiwa 14 R820**

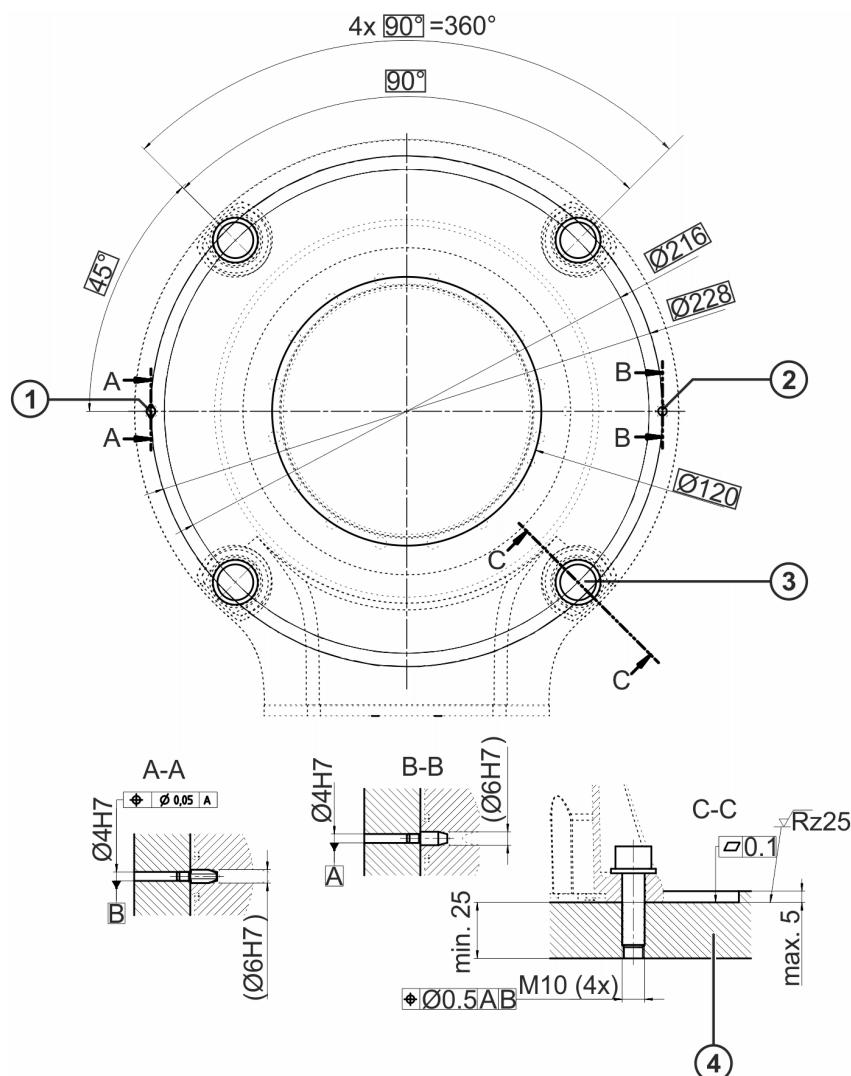


Fig. 6-2: Dimensioned drawing of machine frame mounting, LBR iiwa 14 R820

- 1 Flat-sided locating pin, 6x12
Locating hole 6H7
- 2 Cylindrical locating pin, 6x12
Locating hole 6H7
- 3 M10x35-8.8 Allen screw (4x) with washer
- 4 Steel structure



In order to avoid point offsets (e.g. when exchanging robots), the robot should be pinned.

6.2 Connecting cables and interfaces

Connecting cables

The connecting cables comprise all the cables for transferring energy and signals between the robot and the robot controller. They are connected on the robot side at interface A1. The set of connecting cables comprises:

- Data cable with power supply

Depending on the specification of the robot, various connecting cables are used. The standard cable length is 4 m. Cable lengths of 1 m, 3 m, 4 m, 7 m and 15 m are available as an option. The maximum length of the connecting cables must not exceed 15 m. If the robot is operated on a linear unit which has its own energy supply chain these cables must also be taken into account.

The following points must be observed when planning and routing the connecting cables:

- The bending radius for fixed routing must not be less than 45 mm for data cables.
- Protect cables against exposure to mechanical stress.
- Route the cables without mechanical stress – no tensile forces on the connectors
- Cables are only to be installed indoors.
- Observe permissible temperature range (fixed installation) of 263 K (-10 °C) to 343 K (+70 °C).
- Route the connecting cable in a metal duct; if necessary, additional measures must be taken to ensure electromagnetic compatibility (EMC).

7 Transportation

7.1 Transportation

It must be ensured that the robot is stable while it is being transported. The robot must remain in its transport position until it has been fastened in position. Before the robot is transported, the tooling must be dismounted and the connecting cables must be unplugged.

On delivery of the robot, the transport safeguards such as nails or screws must be removed before installation. If the robot is installed before transportation, it may be jammed tight by rust or glue on contact surfaces.

The following variants are available for transporting the robot:

- Transport packaging
(>>> [7.1.1 "Transportation with transport packaging" Page 77](#))
- Transport box (optional)
(>>> [7.1.2 "Transportation with transport box \(optional\)" Page 78](#))



WARNING

Use of unsuitable handling equipment may result in damage to the robot or injury to persons. Only use authorized handling equipment with a sufficient load-bearing capacity. Only transport the robot in the manner specified here.

NOTICE

The robot may only be transported in the transport position and in the transport container provided.



For removal, the robot must be lifted between axes A2 and A3 and between A4 and A5. This applies to both transportation variants.

7.1.1 Transportation with transport packaging

Transport position

The robot must be in the transport position before it can be transported . The robot is in the transport position when the axes are in the following positions:

A1	A2	A3	A4	A5	A6	A7
0°	25°	0°	90°	0°	0°	0°

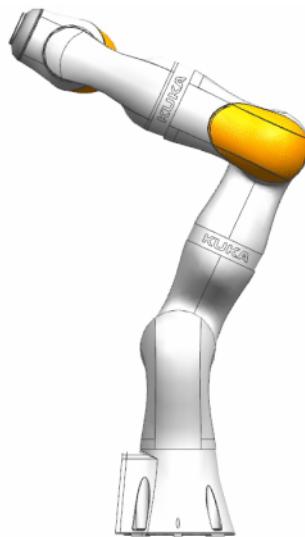


Fig. 7-1: Robot in transport position

Transport dimensions

Transport the robot in the transport packaging provided that has the following outer dimensions:

- Length: 1180 mm
- Width: 780 mm
- Height: 560 mm

The transport dimensions are identical for both variants.

7.1.2 Transportation with transport box (optional)

Transport position

The robot must be in the transport position before it can be transported (>>> *Fig. 7-2*). The robot is in the transport position when the axes are in the following positions:

A1	A2	A3	A4	A5	A6	A7
0°	0°	0°	0°	0°	0°	0°

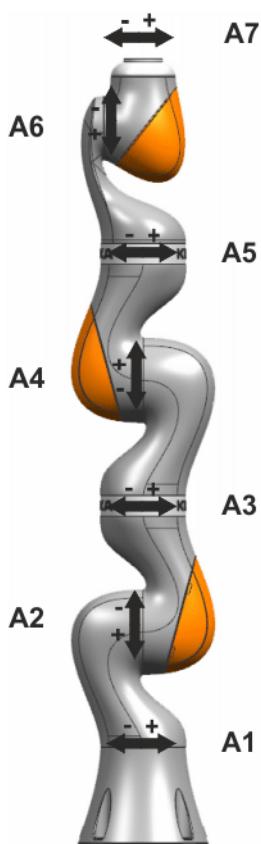


Fig. 7-2: Robot axes

Transport dimensions

Transport the robot in the transport box provided that has the following outer dimensions:

- Length: 1450 mm
- Width: 480 mm
- Height: 340 mm

The transport dimensions are identical for both variants.

8 Start-up and recommissioning

8.1 Installing the machine frame mounting assembly

Description

The machine frame mounting is used for installing robots on a steel structure prepared by the customer.

Precondition

- The mounting surface is prepared as shown in /.
- The substructure has been checked for sufficient safety.
- The machine frame mounting assembly is complete.

Procedure

1. Clean the mounting surface of the robot.
2. Check the hole pattern.
3. Insert the sword pin into the hole pattern.
4. Prepare Allen screws and washers.

Robot variant	Allen screws	Nm
LBR iiwa 7 R800	4x M8x30-8.8	23
LBR iiwa 14 R820	4x M10x35-8.8	45

The foundation is now ready for the robot to be installed.

8.2 Installing a floor-mounted robot

Description

This description is valid for the installation of floor-mounted robots.

4 Allen screws with washers are used for fastening the robot to the bedplate or to a machine frame. 2 locating pins are provided to ensure correct positioning.

The installation and start-up of the robot controller, the tools mounted and the applications are not described here.

Precondition

- Holes must be drilled in the mounting base in accordance with the hole pattern.
- The connecting cables must be installed on the system side.
- Any tools or other system components which would hinder the work have been removed.

Procedure

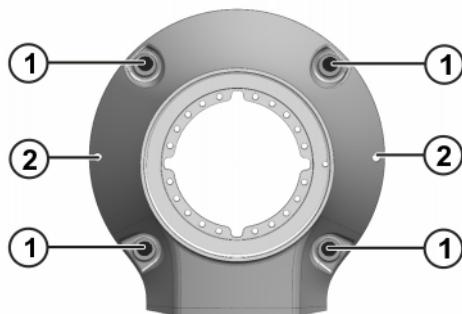


Fig. 8-1: Robot installation position

1 Allen screws

2 Locating pins

1. Check that the locating pins are undamaged and fitted securely.
2. Move the robot to the installation site.
3. Carefully lower the robot vertically onto the mounting surface. Ensure that an entirely vertical position is maintained in order to prevent damage to the locating pins.
4. Insert 4 Allen screws with washers into the base frame and tighten with a torque wrench in diagonally opposite sequence. Increase the tightening torque to the required value in several stages.

Robot variant	Allen screws	Nm
LBR iiwa 7 R800	4x M8x30-8.8	23
LBR iiwa 14 R820	4x M10x35-8.8	45



Retighten the 4 Allen screws of the base frame with a torque wrench after 100 hours of operation.

5. Connect the data cable.
6. Mount tooling, if present.
7. Check the position of all cables. They must not be under mechanical strain nor be able to chafe against other components.
8. If required, mount the tool and connect the energy supply systems.

8.3 Overview of connecting cables and interfaces

Configuration

The connecting cable is used to transfer power and signals between the robot controller and the robot.

The connecting cable comprises:

- Data cable with power supply

Interface

For connection of the connecting cable between the robot controller and the robot, the following connectors are available at the interfaces:

Standard connecting cable



Wiring diagram

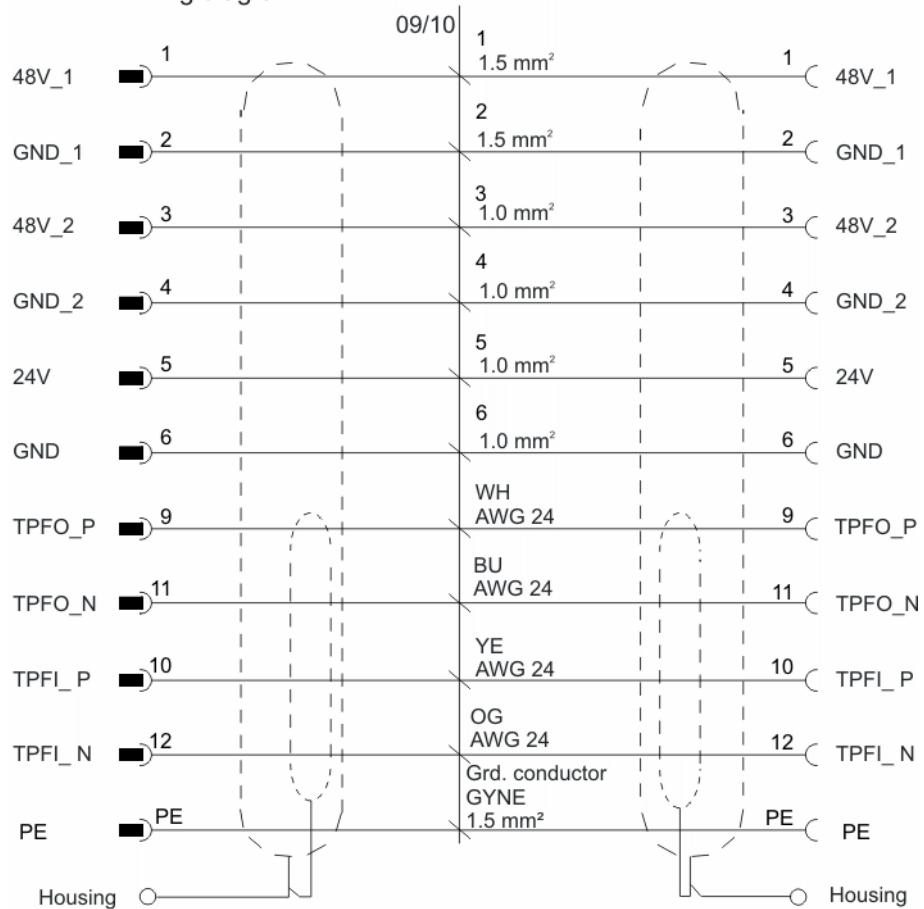


Fig. 8-2: Connecting cable, data cable X21 - X31

9 Maintenance

9.1 Maintenance

No maintenance required if used for designated purpose.

9.2 Cleaning the robot

Description

The robot must be cleaned in compliance with the instructions given here in order to prevent damage. These instructions only refer to the robot. System components, tools and the robot controller must be cleaned in accordance with the cleaning instructions relevant to them.

The following must be taken into consideration when using cleaning agents and carrying out cleaning work:

- Only use solvent-free, water-soluble cleaning agents.
- Do not use flammable cleaning agents.
- Do not use aggressive cleaning agents.
- Do not use steam or refrigerants for cleaning.
- Do not use high-pressure cleaners.
- It must be ensured that no cleaning agent enters electrical or mechanical system components.
- Personnel protection measures must be taken.



WARNING

Unintentional robot motions can cause injuries and damage to property. If work is carried out on an operational robot, the robot must be secured by activating the EMERGENCY STOP device.

Warn all persons concerned before starting to put it back into operation.

Procedure

1. Shut down the robot.
2. If necessary, stop adjacent system components and lock them.
3. Remove enclosures if this is necessary in order to carry out the cleaning work.
4. Clean the robot.
5. Fully remove all cleaning agents from the robot.
6. Clean any areas of corrosion and reapply corrosion protection.
7. Remove cleaning agents and equipment from the workspace of the robot.
8. Dispose of cleaning agents properly.
9. Install any safety equipment that has been removed and check that it is functioning correctly.
10. Replace any damaged or illegible plates and covers.
11. Put back in place any enclosures that have been removed.
12. Only put fully functional robots and systems back into operation.

10 Repair

No repair work is planned for the robot. For further information, please contact your local KUKA Customer Support.

11 Decommissioning, storage and disposal

11.1 Decommissioning, floor-mounted robots

Description

This section describes all the work required for decommissioning the robot if the robot is to be removed from the system. After decommissioning, it is prepared for storage or for transportation to a different location.

The robot can be transported using the correct transport container ([>>> 7 "Transportation" Page 77](#)).

Precondition

- The robot has been brought into the position for removing tooling and other equipment.

Procedure

1. Secure the robot.



WARNING

Unintentional robot motions can cause injuries and damage to property. If work is carried out on an operational robot, the robot must be secured by activating the EMERGENCY STOP device.
Warn all persons concerned before starting to put it back into operation.

2. Remove tools and equipment.
3. Put the robot into operation and move it into the transport position.
4. Secure the robot again.
5. Switch the robot controller off.
6. Release and unplug the connecting cables.
7. Remove Allen screws and sword pin.

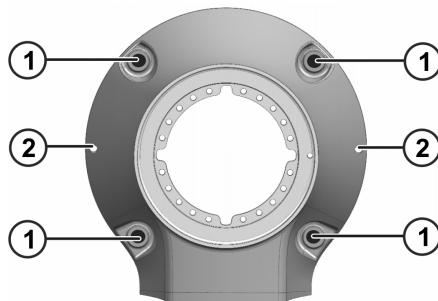


Fig. 11-1: Removing a floor-mounted robot

1 Allen screw

2 Locating pin

8. Protect the connectors and hose lines against fouling.
9. Lift the robot and place it in the transport container.
10. Prepare the robot for storage ([>>> 11.2 "Storage" Page 90](#)).

11.2 Storage

Description

If the robot is to be put into long-term storage, the following points must be observed:

- The place of storage must be as dry and dust-free as possible.
- Avoid temperature fluctuations.
- Avoid wind and drafts.
- Avoid condensation.
- Use appropriate coverings that cannot detach themselves and which can withstand the expected environmental conditions.
- Do not leave any loose parts on the robot, especially ones that might knock against other parts.
- Do not leave the robot exposed to direct sunlight while in storage.
- Observe and comply with the permissible temperature ranges for storage.
- Select a storage location in which the packaging materials cannot be damaged.

Procedure

1. Move robot into its transport position and remove it.
2. Remove tools and equipment.
3. Clean and dry the robot. No dirt or cleaning agents may remain on or in the robot.
4. Inspect the robot, both internally and externally.
5. Remove any foreign bodies.
6. Remove any corrosion.
7. Attach all covers to the robot and check that the seals are correctly in place.
8. Seal off electrical connections with suitable covers.
9. Seal hose connections by suitable means.
10. Place the robot in the transport container.

11.3 Disposal

When the robot reaches the end of its useful life, it can be removed and dismantled, and the materials can be disposed of properly by type.

The following table provides an overview of the materials used in the robot.

Material, designation	Subassembly, component	Note
Aluminum, steel	Load-bearing structures	Contain adhesives and paint
	Robot base	
Copper	Cables	
Steel	Screws, locating pin	
PUR	Cable sheaths	
	Joint module	Dispose of joint module without dismantling it.

Material, designation	Subassembly, component	Note
	Electronic components	Dispose of electronic components without dismantling them.

12 KUKA Service

12.1 Requesting support

Introduction

This documentation provides information on operation and operator control, and provides assistance with troubleshooting. For further assistance, please contact your local KUKA subsidiary.

Information

The following information is required for processing a support request:

- Description of the problem, including information about the duration and frequency of the fault
- As comprehensive information as possible about the hardware and software components of the overall system

The following list gives an indication of the information which is relevant in many cases:

- Model and serial number of the kinematic system, e.g. the manipulator
 - Model and serial number of the controller
 - Model and serial number of the energy supply system
 - Designation and version of the system software
 - Designations and versions of other software components or modifications
 - Diagnostic package KRCDiag
- Additionally for KUKA Sunrise: existing projects including applications
- For versions of KUKA System Software older than V8: archive of the software (KRCDiag is not yet available here.)
- Application used
 - External axes used

12.2 KUKA Customer Support

Availability

KUKA Customer Support is available in many countries. Please do not hesitate to contact us if you have any questions.

Argentina

Ruben Costantini S.A. (Agentur)
 Luis Angel Huergo 13 20
 Parque Industrial
 2400 San Francisco (CBA)
 Argentina
 Tel. +54 3564 421033
 Fax +54 3564 428877
ventas@costantini-sa.com

Australia

KUKA Robotics Australia Pty Ltd
45 Fennell Street
Port Melbourne VIC 3207
Australia
Tel. +61 3 9939 9656
info@kuka-robotics.com.au
www.kuka-robotics.com.au

Belgium

KUKA Automatisering + Robots N.V.
Centrum Zuid 1031
3530 Houthalen
Belgium
Tel. +32 11 516160
info@kuka.be
www.kuka.be

Brazil

KUKA Roboter do Brasil Ltda.
Travessa Claudio Armando, nº 171
Bloco 5 - Galpões 51/52
Bairro Assunção
CEP 09861-7630 São Bernardo do Campo - SP
Brazil
Tel. +55 11 4942-8299
Fax +55 11 2201-7883
info@kuka-roboter.com.br
www.kuka-roboter.com.br

Chile

Robotec S.A. (Agency)
Santiago de Chile
Chile
Tel. +56 2 331-5951
Fax +56 2 331-5952
robotec@robotec.cl
www.robotec.cl

China

KUKA Robotics China Co., Ltd.
No. 889 Kungang Road
Xiaokunshan Town
Songjiang District
201614 Shanghai
P. R. China
Tel. +86 21 5707 2688
Fax +86 21 5707 2603
info@kuka-robotics.cn
www.kuka-robotics.com

Germany

KUKA Deutschland GmbH
Zugspitzstr. 140
86165 Augsburg
Germany
Tel. +49 821 797-1926
Fax +49 821 797-41 1926
Hotline.robots.de@kuka.com
www.kuka.com

France

KUKA Automatisme + Robotique SAS
Techvallée
6, Avenue du Parc
91140 Villebon S/Yvette
France
Tel. +33 1 6931660-0
Fax +33 1 6931660-1
commercial@kuka.fr
www.kuka.fr

India

KUKA India Pvt. Ltd.
Office Number-7, German Centre,
Level 12, Building No. - 9B
DLF Cyber City Phase III
122 002 Gurgaon
Haryana
India
Tel. +91 124 4635774
Fax +91 124 4635773
info@kuka.in
www.kuka.in

Italy

KUKA Roboter Italia S.p.A.
Via Pavia 9/a - int.6
10098 Rivoli (TO)
Italy
Tel. +39 011 959-5013
Fax +39 011 959-5141
kuka@kuka.it
www.kuka.it

Japan

KUKA Japan K.K.
YBP Technical Center
134 Godo-cho, Hodogaya-ku
Yokohama, Kanagawa
240 0005
Japan
Tel. +81 45 744 7531
Fax +81 45 744 7541
info@kuka.co.jp

Canada

KUKA Robotics Canada Ltd.
2865 Argentia Road, Unit 4-5
Mississauga
Ontario L5N 8G6
Canada
Tel. +1 905 858-5852
Fax +1 905 858-8581
KUKAFocusCenter@KUKARobotics.com
www.kukarobotics.ca

Korea

KUKA Robotics Korea Co. Ltd.
RIT Center 306, Gyeonggi Technopark
1271-11 Sa 3-dong, Sangnok-gu
Ansan City, Gyeonggi Do
426-901
Korea
Tel. +82 31 501-1451
Fax +82 31 501-1461
info@kukakorea.com

Malaysia

KUKA Robot Automation (M) Sdn Bhd
South East Asia Regional Office
No. 7, Jalan TPP 6/6
Taman Perindustrian Puchong
47100 Puchong
Selangor
Malaysia
Tel. +60 (03) 8063-1792
Fax +60 (03) 8060-7386
info@kuka.com.my

Mexico

KUKA de México S. de R.L. de C.V.
 Progreso #8
 Col. Centro Industrial Puente de Vigas
 Tlalnepantla de Baz
 54020 Estado de México
 Mexico
 Tel. +52 55 5203-8407
 Fax +52 55 5203-8148
info@kuka.com.mx
www.kuka-robotics.com/mexico

Norway

KUKA Sveiseanlegg + Roboter
 Sentrumsvegen 5
 2867 Hov
 Norway
 Tel. +47 61 18 91 30
 Fax +47 61 18 62 00
info@kuka.no

Austria

KUKA CEE GmbH
 Gruberstraße 2-4
 4020 Linz
 Austria
 Tel. +43 732 784 752 0
 Fax +43 732 793 880
KUKAAustriaOffice@kuka.com
www.kuka.at

Poland

KUKA CEE GmbH Poland
 Spółka z ograniczoną odpowiedzialnością
 Oddział w Polsce
 Ul. Porcelanowa 10
 40-246 Katowice
 Poland
 Tel. +48 327 30 32 13 or -14
 Fax +48 327 30 32 26
ServicePL@kuka.com

Portugal

KUKA Robots IBÉRICA, S.A.
 Rua do Alto da Guerra nº 50
 Armazém 04
 2910 011 Setúbal
 Portugal
 Tel. +351 265 729 780
 Fax +351 265 729 782
info.portugal@kukapt.com
www.kuka.com

Russia

KUKA Russia OOO
1-y Nagatinskiy pr-d, 2
117105 Moskau
Russia
Tel. +7 495 665-6241
support.robotics.ru@kuka.com

Sweden

KUKA Svetsanläggningar + Robotar AB
A. Odhnars gata 15
421 30 Västra Frölunda
Sweden
Tel. +46 31 7266-200
Fax +46 31 7266-201
info@kuka.se

Switzerland

KUKA Roboter CEE GmbH
Linz, Zweigniederlassung Schweiz
Heinrich Wehrli-Strasse 27
5033 Buchs
Switzerland
Tel. +41 62 837 43 20
info@kuka-roboter.ch

Slovakia

KUKA CEE GmbH
organizačná zložka
Bojnicky 3
831 04 Bratislava
Slovakia
Tel. +420 226 212 273
support.robotics.cz@kuka.com

Spain

KUKA Iberia, S.A.U.
Pol. Industrial
Torrent de la Pastera
Carrer del Bages s/n
08800 Vilanova i la Geltrú (Barcelona)
Spain
Tel. +34 93 8142-353
comercial@kukarob.es

South Africa

Jendamark Automation LTD (Agentur)
76a York Road
North End
6000 Port Elizabeth
South Africa
Tel. +27 41 391 4700
Fax +27 41 373 3869
www.jendamark.co.za

Taiwan

KUKA Automation Taiwan Co. Ltd.
1F, No. 298 Yangguang ST.,
Nei Hu Dist., Taipei City, Taiwan 114
Taiwan
Tel. +886 2 8978 1188
Fax +886 2 8797 5118
info@kuka.com.tw

Thailand

KUKA (Thailand) Co. Ltd.
No 22/11-12 H-Cape Biz Sector Onnut
Sukhaphiban 2 road, Prawet
Bangkok 10250
Thailand
Tel. +66 (0) 90-940-8950
HelpdeskTH@kuka.com

Czech Republic

KUKA Roboter CEE GmbH
organizační složka
Pražská 239
25066 Zdiby
Czech Republic
Tel. +420 226 212 273
support.robots.cz@kuka.com

Hungary

KUKA HUNGÁRIA Kft.
Fö út 140
2335 Taksony
Hungary
Tel. +36 24 501609
Fax +36 24 477031
info@kuka-robotics.hu

USA

KUKA Robotics Corporation
51870 Shelby Parkway
Shelby Township
48315-1787
Michigan
USA
Tel. +1 866 873-5852
Fax +1 866 329-5852
CustomerService@kuka.com
www.kuka.com

United Kingdom

KUKA Robotics UK Ltd
Great Western Street
Wednesbury West Midlands
WS10 7LL
United Kingdom
Tel. +44 121 505 9970
Fax +44 121 505 6589
service@kuka-robotics.co.uk
www.kuka-robotics.co.uk

Index

2006/42/EC:2006.....	72
2014/30/EU:2014.....	72
95/16/EC.....	72
EN ISO 13849-1:2015.....	72
EN ISO 13849-2:2012.....	72
EN ISO 13850:2015.....	72
Enabling device.....	57, 58
Enabling device, external.....	57, 60
Enabling switches.....	58

A

Accessories.....	11, 51
Angle of rotation.....	30
ANSI/RIA R.15.06-2012.....	72
Applied standards and directives.....	72
AUT.....	53
Automatic.....	53
Automatic mode.....	70
Axis data, LBR iiwa 14 R820.....	22
Axis data, LBR iiwa 7 R800.....	16
Axis range.....	53

B

Basic data, LBR iiwa 14 R820.....	21
Basic data, LBR iiwa 7 R800.....	15
Brake defect.....	64
Braking distance.....	53

C

CE mark.....	52
Cleaning.....	85
Cleaning work.....	71
Connecting cables.....	11, 51
Connecting cables and interfaces.....	75
Connecting cables and interfaces, overview	82
CRR.....	54

D

Danger zone.....	54
Declaration of conformity.....	52
Declaration of incorporation.....	51, 52
Decommissioning.....	71, 89
Disposal.....	71, 89, 90
Documentation, industrial robot.....	7

E

EC declaration of conformity.....	52
Electromagnetic compatibility (EMC).....	72
Electromagnetic compatibility (EMC):.....	72
EMC Directive.....	52, 72
EMERGENCY STOP device.....	57–59
EMERGENCY STOP, external.....	57, 59
EN 60204-1:2006/A1:2009.....	72
EN 61000-6-2:2005.....	72
EN 61000-6-4:2007 + A1:2011.....	72
EN 614-1:2006+A1:2009.....	72
EN 62061:2005 + A1:2013 + A2:2015.....	72
EN ISO 10218-1:2011.....	72
EN ISO 12100:2010.....	72

Faults.....	65
Floor-mounted robot, installing.....	81
Foundation data, LBR iiwa 14 R820.....	25
Foundation data, LBR iiwa 7 R800.....	19
Function test.....	67

G

General information.....	29
General safety measures.....	64

H

Hand-held control panel.....	11, 51
Handling equipment.....	77

I

Industrial robot.....	51
Intended use.....	9, 51
Introduction.....	7
IT security.....	66

J

Jog mode.....	63
---------------	----

K

KCP.....	8
KCP, KUKA Control Panel.....	30
KUKA Customer Support.....	93
KUKA Service.....	93
KUKA smartPAD.....	54
KUKA Sunrise Cabinet.....	11

L

Labeling.....	63
LBR iiwa.....	8
Liability.....	51
Low Voltage Directive.....	52

M

Machine frame mounting with centering.....	73
Machine frame mounting, installation.....	81
Machinery Directive.....	52, 72
Maintenance.....	70, 85

Manipulator.....	8, 11, 51, 54, 57	Safety, legal framework.....	51
Manual mode.....	69	Service life.....	54
Mode selection.....	61	Single point of control.....	71
Monitoring, physical safeguards.....	59	smartPAD.....	8, 54, 65
Mounting variant.....	73	Software.....	11, 51
N			
Non-safety-oriented functions.....	61	Software limit switches.....	63
O			
Operator.....	53	SPOC.....	71
Operator safety.....	57, 59	Start-up.....	66, 81
Operators.....	56	STOP 0.....	29
Options.....	11, 51	STOP 1.....	29
Overload.....	64	Stop category 0.....	54
Overview.....	11	Stop category 1.....	54
Overview of the robot system.....	11	Stop category 1 (path-maintaining).....	55
P			
Panic position.....	58	Stop reactions, safety-oriented.....	60
Payloads, LBR iiwa 14 R820.....	24	Stop signal.....	29
Payloads, LBR iiwa 7 R800.....	18	Stopping distance.....	29, 53, 57
Performance Level.....	53	Stopping distances.....	29
Personnel.....	55	Stopping distances for LBR iiwa 14 R820.....	40
Planning.....	73	Stopping distances for LBR iiwa 7 R800.....	32
Plant integrator.....	55	Stopping distances for STOP 0, axis 1 to axis 4.....	32, 41
Plates and labels.....	27	Stopping distances for STOP 1, axis 1..	33, 42
Preventive maintenance work.....	71	Stopping distances for STOP 1, axis 2..	35, 44
Product description.....	11	Stopping distances for STOP 1, axis 3..	37, 46
Program override, motion velocity.....	30	Stopping distances for STOP 1, axis 4..	39, 48
Protective equipment.....	63	Stopping time.....	29
Purpose.....	9	Stopping times.....	29
R			
Reaction distance.....	53	Stopping times for LBR iiwa 14 R820.....	40
Recommissioning.....	66, 81	Stopping times for LBR iiwa 7 R800.....	32
Repair.....	70, 87	Stopping times for STOP 0, axis 1 to axis 4.....	32, 41
Robot controller.....	51	Stopping times for STOP 1, axis 1.....	33, 42
S			
Safe operational stop, external.....	57, 60	Stopping times for STOP 1, axis 2.....	35, 44
Safeguards, external.....	63	Stopping times for STOP 1, axis 3.....	37, 46
Safety.....	51	Stopping times for STOP 1, axis 4.....	39, 48
Safety-oriented functions.....	57	Storage.....	71, 89, 90
Safety-oriented stop reactions.....	60	Supplementary load.....	19, 25
Safety functions.....	52	Support request.....	93
Safety instructions.....	7	System integrator.....	52, 55, 56
Safety of machinery.....	72		
Safety stop.....	54		
Safety stop 0.....	54		
Safety stop 1.....	54		
Safety stop 1 (path-maintaining).....	54		
Safety stop, external.....	57, 59		
Safety zone.....	54, 56, 57		
T			
T1.....	55		
T2.....	55		
Technical data.....	15		
Technical data, LBR iiwa 14 R820.....	21		
Technical data, LBR iiwa 7 R800.....	15		
Technical data, overview.....	15		
Terms used.....	8, 30		
Terms, safety.....	53		
Training.....	9		
Transport dimensions.....	78, 79		
Transport position.....	77, 78		
Transportation.....	66, 77		
U			
Use, contrary to intended use.....	51		
Use, improper.....	51		
User.....	53, 55		

Users.....9

V

Velocity monitoring, T1.....62

W

Warnings.....7

Workspace.....53, 56, 57