

AgentForge Subagent Live QA Report

Date: 2026-05-31

Branch: `codex/mobile-live-session-detail`

App: Continuum / Sessio Flutter mobile companion

Backend: `@ascp/host-daemon` on loopback ports `9875` and `9876`

Simulator: iPhone 17 Pro, iOS 26.3, `45696EBE-0456-4051-8EAC-89385E73DD66`

Executive Summary

The live mobile app is buildable and launchable against a real ASCP host daemon. The backend started successfully, generated a fresh six-digit numeric pairing code, and the Flutter app built for iOS simulator with live dart-defines. Core static and unit verification passed.

AgentForge routing was used:

- OpenCode with `opencode-go/qwen3.7-max` executed the live backend/build/test/simulator checklist and used its own configured `XcodeBuildMCP` connection for install, launch, and screenshot capture. It stalled while processing screenshot evidence and did not write its final report, so Codex stopped the stuck process and preserved its observed command output.
- Kiro CLI completed a report-only live-readiness audit and wrote `qa-reports/2026-05-31-kiro-live-readiness-audit.md`.
- Blackbox CLI was attempted twice for a hardcoded-live-data audit. Both attempts exited without writing the requested report, so that route is recorded as failed.
- Codex acted as verifier/reviewer by inspecting subagent artifacts, confirming simulator state with XcodeBuildMCP, preserving screenshot evidence, and creating this consolidated QA report.

Overall verdict: live QA passes for buildability, daemon startup, numeric pairing-code generation, core repository wiring, and simulator launch to the pairing screen. It is not yet complete for model switching or fully automated in-simulator OTP claim/host approval because the current exposed Codex XcodeBuildMCP tool surface has screenshot/UI hierarchy but no tap/type actions, and OpenCode stalled after screenshot capture.

Subagent Route Matrix

Route	Model / Tooling	Result	Evidence
OpenCode	<code>opencode-go/qwen3.7-max</code> , OpenCode MCP <code>XcodeBuildMCP</code>	Partial success; ran <code>backend/tests/build/simulator</code> , then stalled before report write	Command transcript observed in Codex terminal session; screenshot captured by <code>XcodeBuildMCP</code>
Kiro	Kiro CLI, trusted tools	Success; static live-readiness report created	<code>qa-reports/2026-05-31-kiro-live-readiness-audit.md</code>
Blackbox	Blackbox CLI, yolo approval mode	Failed; no report file created after two attempts	First stopped after plan mode, second exited after context compression
Codex verifier	<code>XcodeBuildMCP</code> , shell checks, image inspection	Success; verified simulator UI, backend port, report files, screenshot evidence	<code>qa-reports/2026-05-31-subagent-live-qa-pairing-screen.jpg</code>

Environment

OpenCode reported:

Tool	Version
Flutter	<code>3.41.2</code> stable
Dart	<code>3.11.0</code>
Node	<code>v25.9.0</code>
npm	<code>11.16.0</code>
Xcode	<code>26.3</code> build <code>17C529</code>

Codex verifier confirmed:

- Booted simulator: iPhone 17 Pro, iOS 26.3.
- App bundle id: `app.continuum.mobile`.
- Live daemon process listening on ports `9875` and `9876`.

Backend Live Run

OpenCode started the backend with:

```
ASCP_HOST=127.0.0.1 ASCP_PORT=9875 ASCP_ADMIN_PORT=9876 \
ASCP_DATABASE_PATH=/private/tmp/continuum-mobile-subagent-live-
ja.sqlite \
nohup npm --workspace @ascp/host-daemon run start > /tmp/daemon-
ja.log 2>&1 &
```

Daemon log:

```
{"level":"info","message":"ASCP host daemon
listening","admin_url":"http://127.0.0.1:9876","auth_transport":"loop
back","database_path":"/private/tmp/continuum-mobile-subagent-live-
ja.sqlite","runtime":"codex","url":"ws://127.0.0.1:9875"}
```

Codex verifier confirmed the daemon is still listening:

```
node ... TCP localhost:9875 (LISTEN)
node ... TCP localhost:9876 (LISTEN)
```

Pairing

OpenCode generated a fresh pairing session through the live daemon:

```
curl -s -X POST -H 'Content-Type: application/json' \
-d '{"requested_scopes":
["read:hosts","read:runtimes","read:sessions","write:sessions","read:
approvals","write:approvals","read:artifacts"]}' \
http://127.0.0.1:9876/admin/pairing/sessions
```

Observed response:

```
{
  "code": "424032",
  "expires_at": "2026-05-31T02:21:11.693Z"
```

```
"qr_payload": "  
\\\"code\\\":\\\"424032\\\",\\\"session_id\\\":\\\"pairing:cafda04a-beb4-40a1-  
0816-d887c9f09ed1\\\"}\\\",  
\\\"session_id\\\": \"pairing:cafda04a-beb4-40a1-9816-d887c9f09ed1\"  
}
```

Result: pass for live backend numeric OTP generation. The code is six digits and matches the current Flutter `InputOTP` design.

Limitation: full in-simulator OTP entry and host approval were not completed in this run because the available Codex XcodeBuildMCP tool surface exposes screenshot/UI hierarchy but not tap/type actions. OpenCode had XcodeBuildMCP access and launched the app but stalled before completing interactive OTP entry.

iOS Simulator

OpenCode built the app using live dart-defines:

```
flutter build ios --simulator --debug \\\n  --dart-define=CONTINUUM_MOBILE_MODE=live \\\n  --dart-define=CONTINUUM_ASCP_RPC_ENDPOINT=http://127.0.0.1:9875/rpc \\\n  --dart-define=CONTINUUM_ASCP_WS_ENDPOINT=ws://127.0.0.1:9875/rpc \\\n  --dart-define=CONTINUUM_DAEMON_ADMIN_BASE_URL=http://127.0.0.1:9876 \\\n  --dart-define=CONTINUUM_HOST_ID=host local \\\n  --dart-define=CONTINUUM_ACTIVE_SESSION_ID=sess active \\\n  --dart-define=CONTINUUM_DEVICE_ID=device mobile
```

Observed result:


```
✓ Built build/ios/iphonesimulator/Runner.app
```

OpenCode then used its configured XcodeBuildMCP connection to:

- list simulators,
- select booted iPhone 17 Pro,
- set session defaults for `ios/Runner.xcworkspace / Runner`,
- install `build/ios/iphonesimulator/Runner.app`,
- launch `app.continuum.mobile`,

- capture a screenshot.

Codex verifier captured and preserved the final simulator screenshot:

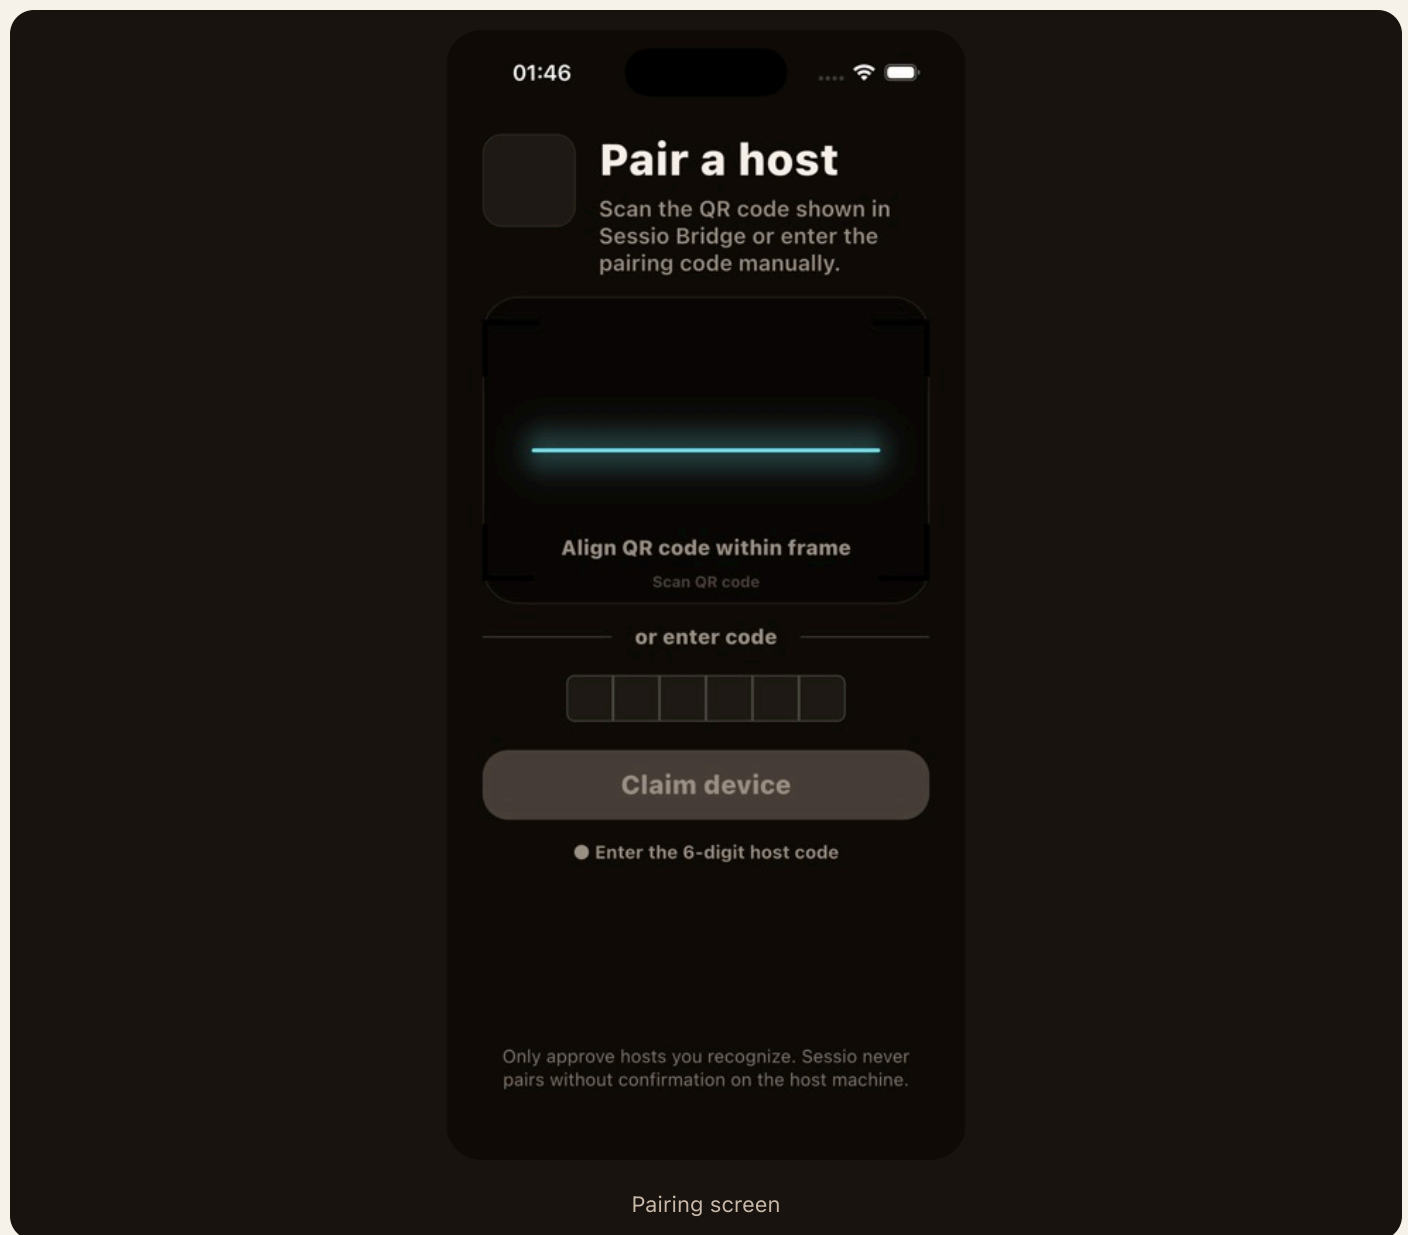

UI hierarchy confirmed:

- Pair a host
- QR frame copy
- six OTP text fields
- Claim device
- Enter the 6-digit host code
- safety copy at bottom

Verification Commands

OpenCode ran these checks successfully:

Check	Result
<code>flutter analyze</code>	Pass, no issues found
<code>flutter test</code>	Pass, 154 tests
<code>flutter_shadcn validate --json</code>	Pass
<code>flutter_shadcn audit --json</code>	Pass
<code>flutter_shadcn deps --json</code>	Pass
<code>npm --workspace @ascp/host-daemon run test</code>	Pass, 21 files / 38 tests
<code>flutter build ios --simulator --debug ...live dart-defines...</code>	Pass

Feature Coverage

Kiro reported these live-backed areas:

Area	Live Backing	Result
Pairing claim	<code>DaemonPairingRepository.claim()</code> to <code>/pairing/claim</code>	Pass by code inspection
Pairing poll	<code>DaemonPairingRepository.poll()</code> to <code>/pairing/claims/:token</code>	Pass by code inspection
Trust material	<code>FlutterSecureStore</code> in live mode	Pass by code inspection
Sessions list	<code>AscpSessionRepository</code> to <code>sessions.list</code>	Pass by code inspection
Session timeline	<code>AscpSessionRepository</code> to <code>sessions.get</code> with events	Pass by code inspection
Chat send input	<code>AscpSessionRepository</code> to <code>sessions.send_input</code>	Pass by code inspection
Live stream	<code>AscpSessionSubscriptionRepository</code> to <code>sessions.subscribe</code> over <code>WebSocket</code>	Pass by code inspection

Area	Live Backing	Result
Approvals	<code>approvals.list</code> and <code>approvals.respond</code>	Pass by code inspection
Inspect/artifacts	<code>artifacts.list</code> , <code>artifacts.get</code> , <code>diffs.get</code>	Pass by code inspection
Trusted devices	daemon <code>/admin/trusted-devices</code> list/revoke endpoints	Pass by code inspection

Hardcoded / Live-Readiness Findings

Severity	Area	Evidence	Result
Low	Settings diagnostics	<code>DaemonSettingsRepository.readDiagnostics()</code> returns constructor-provided const diagnostics with <code>state: 'connected'</code>	Needs live daemon diagnostics endpoint
Low	Devices screen	<code>_fallbackDevices</code> contains <code>MacBook Pro · Local</code> and <code>Ubuntu Workstation</code>	Should become an empty state when daemon returns no devices
Medium	Model switching	current model can be displayed from timeline events, but no UI/controller/repository invokes a model switch contract	Not implemented
Medium	Interactive simulator pairing	app reaches live pairing screen and backend generates numeric OTP; this run did not complete OTP typing + host approval	Needs interactive UI automation route

Model Switching

Result: not implemented.

The app can display `currentModel` when a timeline event provides model metadata, but there is no live UI flow to change model from the chat. Kiro also found that `runtimes.list` is declared in the ASCP method enum, but there is no model-selection UI/controller path. ASCP also does not currently define a core model-switching method, so this should be designed as an explicit protocol-backed capability before UI implementation.

App Logs

Latest app OS log file:

```
/Users/ibrar/Library/Developer/XcodeBuildMCP/workspaces/mobile-  
b6e25f1507dc/logs/app.continuum.mobile_oslog_2026-05-31T02-19-09-  
093Z_helperpid76578_ownerpid71257_b6f282da.log
```

Observed contents:

```
getpwuid_r did not find a match for uid 501  
filtering the log data using "subsystem == "app.continuum.mobile"
```

No Flutter crash was observed in this captured log.

Blockers

- Model switching is not built yet.
- Full OTP entry and host approval were not completed via simulator automation in this run.
- Settings diagnostics still contain a hardcoded connected state.
- Devices screen still has fallback demo devices when no live devices are returned.
- Blackbox CLI did not produce its requested audit report after two attempts.
- OpenCode completed the live checks but stalled while processing screenshot evidence and did not write its own final markdown report.

Recommendations

- Add a protocol/daemon-backed model selection contract before adding chat model switching UI.
- Add or expose tap/type-capable iOS automation to external agents so OTP entry, approval, session navigation, chat send, approval response, and settings revoke can be exercised end to end from the simulator.
- Replace `DaemonSettingsRepository.readDiagnostics()` with a real daemon health/transport diagnostics endpoint.
- Replace `DevicesScreen.\_fallbackDevices` with a real empty state.
- Add a live integration-test profile that starts the daemon, creates a pairing code, pairs the app, approves the device, and verifies sessions/chat/approvals from the same run.

Artifacts

- Kiro live-readiness audit: `qa-reports/2026-05-31-kiro-live-readiness-audit.md`

- Simulator screenshot: `qa-reports/2026-05-31-subagent-live-qa-pairing-screen.jpg`
- OpenCode live QA prompt: `qa-reports/agent-prompts/2026-05-31-live-full-qa-opencode.prompt.md`
- Blackbox hardcoded audit prompt: `qa-reports/agent-prompts/2026-05-31-live-hardcoded-audit-blackbox.prompt.md`