

bb-mcu — Design Document

ai-ee v1 pipeline
generated 2026-08-16 21:57:31

Contents

1	Board and Run Metadata	1
2	Overview	1
3	Requirements	1
4	Architecture	6
5	Schematic	20
6	Layout	22
7	Verification	22
8	DFM and Fabrication	22
9	Run Record (Appendix)	22
10	Artifact Index	24

1 Board and Run Metadata

Field	Value
board	bb-mcu
workspace	boards/bb-mcu
phase	P4
gate status	all 1 recorded gates pass
state created	2026-08-16T17:25:37
state updated	2026-08-16T21:57:21

2 Overview

learning block-basics: a microcontroller board. Powered from an external 3.3 V rail on a screw terminal - no regulation on this board. Programmable and debuggable over the MCU's standard debug interface, with four GPIO brought out to a 0.1 inch header. Any MCU sourceable at JLCPCB is acceptable. Workspace boards/bb-mcu.

—
Owner's brief, verbatim, received 2026-08-16.

3 Requirements

Requirements: bb-mcu

1. Function

A bare microcontroller board, built as a study article. It takes a ready-made 3.3 V rail from an external supply on a screw terminal - there is no regulation, no conversion and no second rail on

this board - and gives that MCU three things and nothing else: power in, the MCU's own standard debug/programming interface brought out to a header, and four general-purpose I/O brought out to a 0.1 inch header. The board's whole job is to hold one MCU, let it be programmed and debugged, and let four of its pins be reached.

BUILD MODE (declared by the brief's opening token, resolved and recorded as the P0 decision in `state.json`; contract in `reference/build-modes.md`):

- token: **learning block-basics**:
- target learning outcome: **block-basics** - the block end to end
- scope tier: **block-only**
- binding level: **canonical**
- stage under study: **none** (no single stage is being taught; the whole P0-P9 run is the lesson)
- geometry: **OUTPUT** - the brief states no size, none is invented here, and the placement earns the outline at P6 (see section 5)

The block under study is the MCU itself. In scope: the MCU, plus exactly the support components its datasheet requires for correct operation at the stated operating point (decoupling, and whatever the part needs on NRST / boot-mode / supply pins to run and to be debugged), plus the interfaces named below, plus what the fab needs to build the board and the bench needs to hold it. Out by mode - a SCOPE decision, not an engineering conclusion, and never a reviewer finding: protection of every kind, filtering the datasheet does not require, indicators (no LEDs), buttons (no reset button), test points, config straps and jumpers, any second rail or second IC, and mechanical/enclosure features beyond mounting the bare board. The mode's defaults are APPLIED below (quantity 5, JLC PCBA single-sided, indoor bench 0-50 C, no enclosure, fewest honest layers, size earned by the layout, stop at P9) instead of being asked.

On "one input interface, one output interface": the input interface is the 3.3 V power in on the screw terminal, and the output interface is the 4-way GPIO header. The debug interface is the third connector and it STAYS - it is not a test point and not scope creep. An MCU that cannot be programmed is not a working MCU, so its standard debug/programming access is part of the block under study, and the brief names it explicitly. All three connectors below are stated by the brief; nothing beyond them is added.

ASSUMED: this pipeline delivers hardware only. No firmware, no bootloader image and no application program is a deliverable here; "programmable" is a property of the board, not a software requirement on the run.

2. Interfaces

Three, all stated by the brief.

- **J1 - power input, screw terminal (STATED)**. 2-pin, DC only, 3.3 V from an external rail. ASSUMED: through-hole 2-pole terminal block, 5.08 mm pitch, the well-stocked JLC/LCSC choice that takes bench lead wire (pitch was not stated; packaging is relaxable under this mode, so it is assumed rather than asked). Polarity silkscreen-marked (+ / -). NOTE: there is no reverse-polarity protection by mode, so the silk marking is the only defense against a swapped supply.
- ****J2 - debug / programming header (STATED as "the MCU's standard debug interface")****. ASSUMED: 0.1 inch pin header, single row, straight, through-hole, carrying whatever the chosen MCU's standard interface is - for a Cortex-M part that is SWD (SWDIO + SWCLK), with GND, and with NRST brought out if the part's standard programming flow expects it. ASSUMED: no trace/SWO pin and no UART bootloader header - the standard debug

interface alone is what the brief asked for. Whether the header also carries 3.3 V as a probe reference pin is open question 2. ASSUMED: any common flying-lead SWD probe (ST-LINK / J-Link / DAPLink class) is the tool; no vendor-specific 10-pin or 20-pin box connector, since packaging is relaxable here.

- ****J3 - GPIO header (STATED: "four GPIO brought out to a 0.1 inch header").**** 0.1 inch pitch, single row, through-hole. ASSUMED: 5 positions
 - the 4 GPIO plus one GND - because a signal with no return is not usable at the bench; this is the return path of the stated interface, not an added feature. Electrical expectations for the four pins are open question 3.
- **No other external interface exists or is wanted:** no USB, no comms connector, no LED, no button, no jumper, no test point, no external reset, no expansion header. All excluded by mode.

What the MCU choice must satisfy (the brief says "any MCU sourceable at JLCPCB is acceptable", so the part number is a P1/P3 selection job, not an owner question - these are the constraints the selection is bound by, and they are recorded here so the selection is checkable):

1. Single supply, runs correctly across at least 3.0-3.6 V (see section 3); no internal or external regulator needed on this board. 2. A standard hardware debug/programming interface on dedicated pins, usable with a common third-party probe, and NOT one that has to be multiplexed away from the four GPIO. 3. At least four free general-purpose I/O left over after the debug pins and any pins the datasheet reserves. 4. Runs and debugs on its internal oscillator - ASSUMED no external crystal, because nothing in the brief needs timing accuracy. A part that mandates an external clock to be programmed is disqualified rather than accompanied by a crystal. 5. No mandatory external components beyond decoupling and whatever the datasheet requires on NRST / boot-mode pins. IMPORTANT: if the chosen part needs a boot-mode pin held at a defined level to run or to be debugged, that resistor is datasheet-required SUPPORT and is in scope - it is not an excluded "config strap". 6. Sourceable and assemblable at JLCPCB: in stock, JLC Basic or Preferred where one meets the above, and in a package their PCBA line places on the top side.

3. Power

- **Source: an external 3.3 V rail on J1 (STATED).** What generates that rail is NOT stated by the brief - see section 8 and open question 1. There is no regulation, conversion, sequencing or power switching on this board (STATED), and no second rail (also excluded by mode).
- ASSUMED: the rail is 3.3 V nominal at $\pm 5\%$ (3.14-3.47 V), and the part selection must tolerate at least 3.0-3.6 V so an ordinary "3.3 V" bench or dev-board rail is always inside range. Confirmed or corrected by the answer to question 1.
- **Rail budget (GUESS, for sizing only):** a small MCU on its internal clock draws roughly 5-30 mA active at 3.3 V, under ~100 mA even for a large part running flat out with peripherals on. Board total GUESSED at < 100 mA, i.e. < 0.35 W. Nothing on this board is a thermal problem, and the terminal, the headers and the copper are all trivially oversized for this current at any sane geometry.
- Decoupling per the chosen MCU's datasheet (per-supply-pin ceramics plus any bulk it specifies) is datasheet-required support and is IN scope. Filtering the datasheet does not require - ferrite beads, pi filters, a separate analog supply network the part does not ask for - is excluded by mode.
- No battery on this board, no charging function, no energy storage, no backup rail, no supercap, no RTC coin cell. None is stated and none is implied by "an external 3.3 V rail".

- Back-feed note (not a safety flag, a bench fact): if question 2 is answered "yes, put 3.3 V on the debug header", then the board has two ways in and no ORing or protection by mode. Powering it from the probe and the screw terminal at the same time is prevented by bench procedure only - the board will not enforce it.
- Excluded by mode (SCOPE decisions - do not record any of these as generally unnecessary): input TVS/ESD, reverse-polarity protection, fuse, UVLO/OVP, input EMI filter, power-good indicator, supply sequencing.

4. Environment

Mode defaults - applied, not asked.

- Ambient: 0 to 50 C, indoor bench.
- Cooling: natural convection. No forced airflow, no heatsink, no chassis thermal path. Nothing on this board dissipates enough to need one.
- No enclosure. No ingress (IP) rating. No vibration, shock, humidity or conformal-coating requirement.
- No formal EMC/emissions campaign - this is a bench study article, not a product. Sane decoupling and return-path layout are still required because they are what make the block correct, not because a test demands them.

5. Size & mounting

- **Outline: no HARD cap, and none may be introduced later.** The brief states no dimension, and none is invented here. Under binding **canonical** the board size, aspect and outline are OUTPUTS of the placement: **RELAXABLE (canonical)** applies to every geometric preference on this board, and any dimension that appears at a later checkpoint is a preference that LOSES to the canonical layout, with the loss recorded as a **state.py decision**.
- Flow that follows from that binding: **board_init --outline auto** at P5 (generous provisional room - it must NOT be given a fixed size; it will refuse one), place to the canonical layout at P6 and pass the **place** gate, then **board_edit --outline fit --margin M** so the board becomes what the placement needs (re-run **planes_gen** if it grew), then route at P7.
- The honest layout here is driven by the three through-hole connectors and by keeping the MCU's decoupling tight to its supply pins - not by heat and not by any stated dimension. No planning number is offered deliberately: on this board a number would be an anchor with nothing behind it.
- Layers: ASSUMED 2, per the mode's "fewest layers the block honestly needs". An MCU with decoupling, three connectors and a ground pour is a genuine 2-layer board. Not fixed here - if the P2/P4 work shows otherwise, 4 layers is allowed under the same rule.
- Mounting: ASSUMED four M3 clearance holes (3.2 mm) inset from the corners so the board can sit on standoffs at the bench; two on opposite corners is acceptable if the earned outline is too small for four. Mounting the bare board is in mode scope; anything beyond it (standoffs, brackets, enclosure bosses) is not.
- Height: ASSUMED no maximum. The board is open on a bench with no enclosure, and the screw terminal itself stands ~10-12 mm with wire fitted.
- Connector placement: ASSUMED all three connectors on board edges with their openings facing outward, power on a different edge from the two signal headers, so bench wiring and the probe do not cross the board. Which edges is the layout engineer's call at P6.

6. Quantity & budget

Mode defaults - applied, not asked.

- Build quantity: 5.
- Cost: minimal, no hard per-unit cap. Prefer JLC Basic/Preferred parts wherever one actually meets the requirement; Extended is allowed for the MCU if that is where the honest choice lives.

7. Assembly

Mode defaults - applied, not asked.

- JLCPCB PCBA, single-sided: all SMT parts on the top side only. The bottom side stays clear of SMT so it can carry unbroken return copper.
- The screw terminal and both 0.1 inch headers are through-hole. ASSUMED: fitted by JLCPCB through-hole assembly if offered at acceptable cost for the chosen parts, hand-soldered after SMT otherwise. Either path leaves the schematic and the footprints unchanged.
- Pipeline stops at P9 (fab package + DFM). Ordering is a separate owner decision and is not requested here.

8. Compliance/safety flags

The mode grants no silence in this section. One flag is genuinely OPEN and must be answered before the pipeline proceeds; the rest are closed by facts the brief states.

- ****Batteries: CLOSED 2026-08-16 by owner answer to question 1 - NOT a battery**** (bench supply or another board's 3.3 V rail). The reasoning that made it a question is kept below because it is what the answer closed. The brief names the supply as "an external 3.3 V rail" but never says what generates it. A bench supply, a dev board's 3.3 V pin and a battery pack all present that way, and battery chemistry/charging is the one thing this pipeline will not proceed on as a guess. There is no charging circuit and no cell on this board under any answer; the answer decides whether the source has to be treated as a battery (discharge behaviour, current limit, deep-discharge) in later phases. Answer it and this flag closes.
- **Mains voltage: DOES NOT APPLY.** The board sees 3.3 V DC only and has no connection to anything mains-referenced. Generating the 3.3 V is off this board and out of scope; if the answer to question 1 is "an off-line supply", the isolation lives in that supply, not here - but say so, because it changes nothing on this board and everything about how it is handled.
- **High current (>3 A): DOES NOT APPLY.** Maximum current anywhere on the board is the MCU's own supply current, GUESSED under 100 mA (section 3), more than an order of magnitude below the threshold. Note for question 1: the SOURCE may be able to deliver far more than the board draws, and this board has no fuse or current limit by mode. At 3.3 V that is not a hazard to a person; it is a bench fact worth stating, so it is stated.
- **>30 V: DOES NOT APPLY.** Nothing on the board exceeds 3.3 V. Not a boundary case. `check_creepage` stays a clean no-op.
- **Motors: DOES NOT APPLY as specified.** Nothing on this board drives a load. If the owner intends one of the four GPIO to drive a motor, a relay or any other inductive load (see question 3), this flag re-opens - a GPIO driving an inductive load off-board needs a conversation about what comes back up that wire, and this board has no protection by mode.
- **RF transmit: DOES NOT APPLY.** No radio function, no antenna, no transmitter. An MCU with an unused integrated radio would not change this, but a wireless MCU should not be chosen for that reason alone.

9. Open questions

Three. Each has a default that is a sensible answer - reply "defaults" and the pipeline proceeds on all three as written.

1. **What actually supplies the 3.3 V?** (This is the safety question - it is the one thing here that will not be guessed.) A bench power supply set to 3.3 V, the 3.3 V pin of another powered board, a USB-powered breakout, or a battery pack? If it is a battery of any kind, say which chemistry and how many cells, and whether anything charges it - nothing on this board would. DEFAULT: a bench supply or another board's 3.3 V rail, indoors, current limited to roughly 0.5 A or less, and NOT a battery. On that default the rail is taken as 3.3 V +/-5 % and the MCU is chosen to accept at least 3.0-3.6 V. 2. **Should the debug header carry the board's 3.3 V as a reference pin?** Most debug probes want to sense the target's supply voltage before they talk to it, and that sense pin is normally wired to the target's own rail. Including it costs one header position and creates a second path to the power rail on a board that has no protection: if the probe is one that can OUTPUT power on that pin, having the screw terminal connected at the same time is a bench-procedure rule the board cannot enforce. DEFAULT: yes - one 3.3 V pin on the debug header, wired to the same rail, for the probe to SENSE only. The board is always powered from the screw terminal, never from the probe. Say no if you would rather have the header carry only the debug signals and ground. 3. ****What are the four GPIO for - do any of them need a particular capability?**** Whether they are plain on/off pins or need to be, say, a UART transmit/receive pair, a PWM-capable output, or an analog input decides WHICH pins they are on the chip, and can decide which chip. The same question covers what gets connected to them: a scope probe or a logic analyser needs nothing extra, but driving an LED, a relay or a motor from one of these pins changes section 8 (see the motors flag). DEFAULT: four plain digital I/O, 3.3 V logic, no alternate-function requirement, no 5 V tolerance, each loaded no harder than the MCU's own per-pin current limit (a few mA - a scope probe, a logic analyser, or an LED with its resistor sitting off-board). Nothing inductive is driven.

ANSWERS (owner, 2026-08-16) - all three defaults taken All three questions are CLOSED. Each answer is also a `state.py` decision in `state.json`; this section is the design-facing copy. Nothing below is an assumption any more - later phases treat these as stated requirements.

1. ****3.3 V source: a bench supply or another board's 3.3 V rail. NOT a battery.**** Indoors, current-limited to roughly 0.5 A or less; nothing charges and nothing stores energy on this board. The rail is 3.3 V +/-5 % and the MCU must accept at least 3.0-3.6 V. Section 8's battery flag is closed; the motors and mains flags stay closed too. 2. **Debug header carries 3.3 V, SENSE-only.** J2 is a 5-position 0.1 inch single-row header carrying 3V3, SWDIO, SWCLK, NRST, GND. The owner fixed the SET; the ORDER was left to the layout engineer and was RULED at P1 as '**GND / SWCLK / 3V3 / SWDIO / NRST**' (position 1 to 5) - see the P1 decision in `state.json`. 3V3 sits at the centre because that is the only arrangement in which a 180 degree reversal of a 5-way shell lands the probe's high-Z VTref input on the board's 3.3 V rail instead of a probe OUTPUT; GND and NRST take the ends so a reversed probe ground clamps reset rather than a data line. The pinout must still be silk-labelled per pin - the header has no keying, and the labels are what a hand-wired flying lead is read from. The probe senses the rail to set its I/O level. The board is powered from J1 only, never from the probe - a bench-procedure rule the board does not enforce, as section 3's back-feed note says. 3. **The four GPIO are plain digital I/O.** 3.3 V logic, no alternate-function requirement, no 5 V tolerance, no inductive load, each loaded no harder than the MCU's own per-pin limit. Pin selection at P4 is therefore free to pick whichever four ordinary GPIO give the cleanest escape from the package - that is now a LAYOUT criterion, not an electrical one.

DELEGATION (owner, 2026-08-16) "Make decisions yourself based on what will give the best learning for the basic system." Design judgment calls in this run are ruled by the orchestrator against that criterion and recorded as decisions; H1-H4 are presented as digests rather than blocking

approvals. This delegation relaxes NOTHING that makes the board true: every gate, the P2/P3 coverage checks and the research they trigger, DFM, the datasheet's own requirements and every section 8 safety question stand exactly as written. Money and irreversible steps still go to the owner - and this board stops at P9 by mode anyway.

4 Architecture

Decisions of record (state.json)

Phase	What	Why
P0	Build mode: mode block-basics; scope block-only; binding canonical	token 'learning block-basics:' in the brief; contract in reference/build-modes.md
P0	3.3 V source is a bench supply or another board's 3.3 V rail - NOT a battery; indoors, current-limited ~0.5 A; nothing charges on this board	owner answer to P0 safety question 1; closes the section-8 battery flag. Rail spec: 3.3 V +/-5 percent, MCU must accept 3.0-3.6 V
P0	Debug header is a 5-pin 0.1 inch flying-lead pinout: 3V3 / SWDIO / SWCLK / NRST / GND, the 3V3 pin SENSE-only	owner answer to P0 question 2; probe reads the rail to set its I/O level, board is always powered from the screw terminal and never from the probe
P0	The four GPIO are plain digital I/O: 3.3 V logic, no alternate-function requirement, no 5 V tolerance, nothing inductive driven	owner answer to P0 question 3; keeps MCU pin selection unconstrained and keeps the motors/inductive-load safety flag closed
P0	Owner delegated design rulings to the orchestrator for this run: 'Make decisions yourself based on what will give the best learning for the basic system'	H1-H4 are presented as digests and ruled by the orchestrator with that criterion; owner is still consulted for safety questions and any money/irreversible step. Gates, coverage, research and DFM are unaffected - a mode and a delegation relax neither
P1	P1 roster: research-component-scout (wave A, alone), then research-reference-design + research-interface-spec in parallel (wave B) off the scout's short-list. research-power-architect SKIPPED	the MCU family decides what the 'standard debug interface' even is (ARM SWD vs a RISC-V single-wire port), so interface-spec and reference-design must not run blind - wave A gates them. Power-architect is skipped under its own 'unless trivially powered' clause: one external 3.3 V rail, no conversion, no sequencing, no second rail, <100 mA guessed

Phase	What	Why
P1	MCU family ruled: STM32F030F4P6TR (LCSC C89040, TSSOP-20, ARM Cortex-M0, SWD on dedicated PA13/PA14). Runners-up rejected: STM32C011F4P6, PY32F030F28P6TU, CH32V003F4P6, STM32G031F4P6	learning criterion (owner delegation). SWD is the canonical standard debug interface the brief names; CH32V003 single-wire SWIO needs a WCH-Link-class probe and would rewrite the owner-answered J2 pinout. PY32 is disqualified on a MECHANICAL ground for a library-seeding board: puya.com is not on the research fetch allowlist, so its records could never be sourced - st.com is. Against C011: F030 has genuinely dedicated NRST and BOOT0 pins (no alt function on either), so the minimum system teaches boot-mode strapping as its own concept instead of hiding it on SWCLK, and its required 10k BOOT0 pull-down is the exact 'datasheet-required support, not an excluded config strap' boundary this scope tier turns on. Stock 19015 vs 1371 and the deepest documentation base of any 20-pin MCU seal it. Price is not a driver at qty 5
P1	J2 pin order RULED: GND / SWCLK / 3V3 / SWDIO / NRST (position 1..5). Overrides both the order listed in requirements.md section 9 answer 2 and the interface-spec agent's recommended 3V3/SWCLK/GND/SWDIO/NRST	the owner fixed the SET of pins and left the ORDER to the layout engineer, so this uses that latitude, it does not contradict the answer. With a 5-way shell a 180 deg reversal maps probe wire i onto board position 6-i, so the only destructive outcome is a probe OUTPUT landing on board 3V3. Board 3V3 receives the probe's high-Z VTref input if and only if 3V3 sits at position 3 - that makes 3V3-at-centre the unique reversal-safe arrangement. The stated order puts probe GND on 3V3 (hard short); the agent's GND-at-centre order puts the probe's open-drain NRST on 3V3 (shorts whenever reset is asserted, which connect-under-reset does every time). GND and NRST take the ends so probe GND clamps reset (benign, obvious at the bench) instead of a data line, and GND stays adjacent to SWCLK per ARM's return-next-to-clock convention. Cost accepted: this is deliberately NOT a vendor cable order - real flying-lead probes present individually labelled wires, so per-pin silk is what the user reads either way

Phase	What	Why
P1	No series resistors on SWDIO/SWCLK. Considered rejection, not an absence of guidance	Raspberry Pi (100R), Lauterbach (47R) and SEGGER all recommend a series resistor on the target-driven line - this ruling overrules them knowingly and must never be defended with 'no source asks'. Grounds: AN4325 4.3.3 states the embedded pull-up/pull-down remove the need for external resistors; the fastest edge the part can produce is 5 ns (datasheet Table 48) and reflections on a ≤ 50 mm FR-4 trace settle in ~ 1.5 ns against a 125 ns half-bit at ST-LINK/V2's 4 MHz ceiling; and a damping/limiting resistor the datasheet does not require is exactly the filtering that scope tier block-only excludes. Keeping the BOM at what ST actually requires is what makes the required-vs-recommended line visible on this board
P1	No 100 nF capacitor on NRST. Diverges from this repo's stm32-blinky board, which fitted one (C9)	AN4325 files it under Table 6 Optional components, 'for RESET button', and this board has no reset button (buttons are excluded by mode). NRST's permanent internal $\sim 40k$ pull-up needs no external part and the die already filters pulses ≤ 100 ns. Accepted risk, stated so bring-up can judge it: NRST is brought out to J2 on a flying lead, so a noise-triggered reset is conceivable - if bring-up sees one, THAT is the finding this board earned, and it is a knowledge record, not a design error to pre-empt
P1	constraints.json OMITS the diff_pairs key entirely rather than declaring diff_pairs: []	per constraints.schema.md an explicit empty list DISABLES check_diffpair board-wide while omitting the key leaves auto-discovery armed. Both are no-ops on a board with no pair, so take the fail-safe one: disabling a check board-wide to say 'we have none' is how a silent blind spot gets built in for the next edit
P1	SWD binds NOTHING on layout: no controlled impedance, no pair, no length matching, no termination, no return-path rule. high_speed and diff_pairs stay empty of SWD entries	5 ns worst-case edge settles in ~ 1.5 ns on a ≤ 50 mm trace against a 125 ns half-bit at 4 MHz (80x margin, still 14x at STLINK-V3's 24 MHz), and stackups.yaml records live-verified that JLC sells NO impedance-controlled 2-layer stackup - an impedance.ohm key here would be unbuildable as well as unnecessary. The ≤ 50 mm / over-the-pour / keep-SWCLK-clear guidance stays ADVISORY in notes, never an enforced constraint. Recorded because the temptation to invent a 50 ohm target is exactly what would propagate a fake requirement into P5 rules and P7 routing

Phase	What	Why
P2	constraints.json declares TWO blocks[] entries - topology 'mcu' and topology 'swd-debug-port' - not one	coverage interface slots are derived ONLY from diff_pairs[].base (knowledge.lib.workspace.slots), so SWD would get no slot at all unless a fake differential pair were invented, which would inject an un-buildable impedance requirement into P5/P7. Declaring the debug port as its own block is the honest way to make the machinery cover it: it IS a functional block of this board, and its knowledge (pull requirements, reversal-safe pinout, header conventions) is reusable across ANY MCU board independent of the MCU family, which is exactly the kind of record this seeding run exists to produce. Cost: one extra research task against a per_run budget of 6, with 3 expected in total
P2	J3 pin order: IO1 / IO2 / GND / IO3 / IO4 (positions 1..5). Four GPIO = PA0, PA1, PA2, PA3 (TSSOP-20 pins 6-9)	owner fixed the SET (4 GPIO + a GND), order was open. GND at centre halves the worst-case signal-to-return distance on the flying lead (4 positions to 2) and reuses J2's reversal geometry; nothing destructive either way here since J3 carries no rail. PA0-PA3 chosen as a pure LAYOUT criterion (the owner's answer 3 freed it from any electrical one); BOOT0(1)/NRST(4)/SWDIO(19)/SWCLK(20) all cluster at ONE package end, so J2 takes all three debug signals off that end without crossing, while PA0-PA3 escape from the diagonally opposite region. Tie-breakers over the equally adjacent PA5-PB1: one port with consecutive bits, and maximum distance from SWCLK. No alternate-function claim is made - this run's research did not verify the AF map
P2	Stackup JLC2313_1.6, 2 layers, 1 oz HASL, B.Cu unbroken GND pour by planes.gen default. No 4-layer escalation condition written. One flat root sheet, hierarchy rejected	verified available:true and the defaults[2] entry in stackups.yaml. JLC sells no impedance-controlled 2-layer stackup and nothing on this board needs one - that is the layer-count justification, not an apology. A 4L trigger would have nothing to trigger: a TSSOP-20 with no exposed pad has no thermal path into an inner plane to buy. Hierarchy rejected for nine parts and ten nets on the recorded /<sheet>/<LABEL> export hazard that cost lumina-par

Phase	What	Why
P2	power[] declares +3V3 only, NOT GND. placement.sides pins the six SMT parts (U1, C1-C4, R1) to front; the three THT connectors get no entry	declaring GND would manufacture a P8 error: at 0.1 A the declaration sizes nothing (rules.gen buckets it into Default) but check_pdn errors pdn_undecoupled on a rail with no caps, and the only fix would be a waiver. Deliberate divergence from bb-buck, which wrote exactly that waiver at 2.6 A where it was worth it. The sides entries are what enforce requirements s7 single-sided PCBA against the U19 annealer, which can otherwise legitimately move a free SMT cluster to the back; I verified the THT exemption directly at place_anneal.py:250, flip-pable=(kind=='free' and not thru), so a through-hole part is structurally unflippable and needs no entry
P2	Connector edges declared as a rotatable SET: J1 right (pos 0.5), J2 top, J3 left. rot deliberately unset on all three. NOTHING was relaxed by the mode at P2	what binds is three DIFFERENT edges with power apart from the two signal headers, not the compass directions; J1's pos 0.5 is load-bearing (directly opposite VDD/VSS pins 15/16 and clear of the corner mounting holes). rot is left unset because bb-buck recorded the cost of guessing a footprint's native entry direction. No relaxation decision exists because the brief states no dimension - there is no stated value to lose, and geometry stays an OUTPUT earned at P6
P2	VDDA is treated as this board's CLOCK supply, tied directly to VDD with no series element of any kind. Any ferrite/filter into VDDA is a design FAULT here, not merely an out-of-scope extra	P2 research found datasheet Figure 12 (p41) puts the internal RC oscillators and the PLL in the analog domain fed from VDDA - and this board runs on the internal RC with no crystal, so VDDA powers the clock, not an unused ADC. Table 21 additionally states VDDA must sit at a potential equal to or higher than VDD, which a series element can only violate. This REPLACES the earlier and weaker justification (P1: 'AN4325's filter is recommended-only, and the mode excludes non-required filtering') with a positive engineering reason. The conclusion is unchanged - no filter - but the reason now survives a reviewer who does not accept scope arguments

Phase	What	Why
P2	R1 is a 10k pull-DOWN from BOOT0 to GND (boot from main flash). BRING-UP VERIFICATION ITEM: the strap polarity is not established by any allowlisted source	the P2 researcher established from the datasheet that BOOT0 has NO internal pull and so must be strapped, but correctly refused to assert WHICH level selects which memory - that mapping is in RM0360, which is on no allowlisted host, and the researcher kept it out of the record rather than smuggling it into prose. The design nonetheless needs a direction, and it rests on three converging pieces of P1 evidence: the reference-design agent read AN4325 (via a non-allowlisted mirror) showing R2 as a 10k pull-DOWN, this repo's own stm32-blinky carries 'R2 10k BOOT0 pulldown (run from flash)', and BOOT0=0 selecting main flash is uniform across the STM32 families. That is sound enough to build on and NOT sound enough to write a knowledge record about - which is exactly why it is recorded here as a decision and flagged for bring-up to confirm on hardware
P2	The J2 pin-order ruling's premise - that a debug probe's rail pin is a high-impedance SENSE input, not a driver - is P1-sourced but NOT allowlist-sourced. Added to the bring-up verification list beside the BOOT0 strap polarity	the P2 swd-debug-port researcher honestly refused to assert reversal SAFETY, because it could not source the probe side from any allowlisted host (arm.com and segger.com are not on the list at all) - it grounded only the pin-order GEOMETRY and labelled the i -> (n+1)-i derivation as unsourced in the record prose. That is a fair challenge to my own P1 ruling and it is recorded rather than brushed aside. The evidence the ruling actually rests on came from P1 plain-web research: ST UM2448 describes the STLINK-V3SET rail pin as 'Input for STLINK-V3SET', SEGGER states J-Link's is 'not intended to power the target system', and measured VTref draw is 25-170 uA. That is sound enough to choose a pin order and not sound enough to write a knowledge record about - the same line the BOOT0 strap sits on. The board is safe either way: the ruled order is no WORSE than any alternative under any premise, and strictly better if the premise holds

Phase	What	Why
P2	Accepted the corrected mcu-supply-pin-pair-decoupling as ONE record at level topology bounded by vdd_v 1.8-3.6. Did NOT take the researcher's own proposed split into a principle plus a topology record - carried to the promote pass instead	the split (unbounded principle 'the bank is counted per supply pin and per rail, not per device' + topology record holding the capacitance values with the rail bound) is genuinely the better shape and the researcher proposed it against its own interest. But shape is what the owner rules on at promotion, and the record as corrected is already sound: the uncited idd_ma<=120 bound is gone, X5R is gone, and the rail bound is now sourced from pages the researcher personally read (AN13033 Table 6 p5 showing the bank changing DISCONTINUOUSLY below the range - 22uF+100nF+47pF on a DC-DC core rail - plus ST Table 21, with p43 added to the record's own sources). Recorded because the researcher disclosed the incentive rather than hiding it: the checklist's decoupling row is min_level topology, so a principle-level record would have left this board showing a decoupling gap. It tested the counterfactual and said that was not its reason - that disclosure is what makes the ruling reviewable
P2	The no-series-resistor ruling stands, but it is now recorded as a CONDITIONAL that this board passes, not as a family fact. Infineon AN220270 p30 recommends 20 ohm on SWCLK unconditionally ('in general, it is recommended'); this board omits it because its own tr-vs-tau check clears by ~80x	the second reader flagged the tension explicitly: a future design agent reading only the record's remedy_if_check_fails branch could omit a resistor Infineon would fit. The knowledge records now express it correctly - the pulls record declines to rule on series elements and hands off to the edge-rate record's per-board rise-time-against-line-delay check, and both disclose the Infineon recommendation they do not carry. So the library will not tell a future board 'no series resistor needed'; it will tell it to run the check. For bb-mcu specifically the check is decisive: 5 ns fastest specified edge (DS Table 48, and the Min column is empty on every fmax/tr/tf row so 5 ns is a specified fastest, not a guaranteed floor) against ~1.5 ns settling on a <=50 mm trace and a 125 ns half-bit at 4 MHz. Flagged for the promote pass as a curation question, not a design change

Phase	What	Why
P2	DESIGNING UNDER COVERAGE GAP: slot block:B2 (swd-debug-port) stays gap on three classes - esd, decoupling, constraints-emission. No second research round opened, though 4 of the 6-task budget remain	these are the rows the first pass DECLARED as honest gaps rather than filling with weak sources, and a second round would hit the same wall: ESD knowledge for a debug header needs IEC 61000-4-2 or a vendor ESD app note, and the two hosts that would carry the probe-side and standards material (arm.com, segger.com) are not on the fetch allowlist at all. More important, the gap is RISKLESS on this board: esd and decoupling are feature classes the block-only scope tier EXCLUDES, so even perfect knowledge would change nothing about what gets built here - and constraints-emission at principle level has a positive answer already recorded, namely that this interface emits NO layout constraints (high_speed and diff_pairs carry no SWD entries, and JLC sells no impedance-controlled 2-layer stackup). The gap is a statement about the LIBRARY, not about this board. It is recorded here rather than left silent, per the build-modes rule, and is the right thing for a future MCU board at a higher scope tier to close
P2	Both new checklists (mcu, swd-debug-port) and all 13 verified records sit at maturity draft/verified with floor_met false - they are queued PENDING for the owner's promotion ruling, not promoted by this run	only owner-approved or bench-proven records satisfy coverage at the default floor, and promotion is explicitly the owner's verb (draft -> verified is the reader's, verified -> approved is the owner's, approved -> proven is bring-up's). This run deliberately does not self-promote: it would be the same agent grading its own homework, and the library is shared with every other board. Two queue entries are compiled in boards/bb-mcu/learnings/queue.yaml awaiting a promote pass
P3	BOM keeps ST's stated capacitance values (4.7 uF bulk, 10 nF + 1 uF on VDDA) even though all three are JLC EXTENDED at 0603, rather than substituting a nearby Basic value	the part-sourcer verified with the raw ranked search window that JLC's curated Basic-passive list carries no 4.7 uF, 10 nF or 1 uF up to 1206 in this catalog snapshot (2026-08-16) - so this is a real catalog gap, not a bad query. Substituting e.g. 10 uF for the 4.7 uF bulk to reach a Basic SKU would be electrically defensible (bulk is a minimum, not a maximum) but it would depart from the value ST's Figure 12 actually states, and this board's entire discipline has been to build exactly what the datasheet requires and to make the required-vs-recommended line visible. The cost argument that would justify substituting does not even apply: the run stops at P9 by mode, so no per-unique-Extended-part assembly fee is ever incurred. 2 Basic (C1 100nF, R1 10k) + 6 Extended; ~1.35 USD/board, ~6.76 USD for the 5-board build

Phase	What	Why
P3	U1 alternate is C32908 (STM32F030F4P6, tube pack, stock 1329) - same die and pinout, differing only in packaging from C89040's tape-and-reel	the P1 scout flagged every candidate as single-source at its exact LCSC row. This is the closest thing to a true drop-in the catalog offers (LCSC serves the identical datasheet document for both). The PY32F030 is deliberately NOT listed as an alternate despite being pin-compatible: it was rejected at P1 on the hard ground that puya.com is not on the research fetch allowlist, so its behaviour can never be sourced by this pipeline, and it is not a verified drop-in. U1 stock re-verified live at 18,977 (19,015 at P1 - normal drift)
P3	ACCEPTED the pulled U1 SOP-20 land pattern despite two deviations from ST Figure 37: pad 0.35 x 1.494 mm vs 0.40 x 1.35 mm, and row spacing 6.00 mm vs 5.75 mm. No hand edit to the footprint	worked the geometry rather than judging the delta. At the package's 6.4 mm lead span with a ~0.6 mm foot, the lead foot sits about 2.6-3.2 mm from the centreline. ST's land spans 2.20-3.55 mm from centreline; the pulled land spans 2.253-3.747 mm. BOTH fully capture the foot - the pulled one trades ~0.05 mm of heel for ~0.20 mm more toe, which is the direction that helps fillet formation and inspection. The narrower pad also WIDENS the inter-pad gap from 0.25 mm (ST) to 0.30 mm, so solder-bridging risk goes DOWN, not up. It is the EasyEDA/LCSC land for this exact LCSC part number, i.e. the one JLC's own PCBA line places. Verified pin-1 independently: silk dot and chamfered corner both anchor at pad 1 only, confirmed in a kicad-cli render
P3	DEFECT FOUND AND FIXED: J1's pulled footprint (C8465, WJ500V-5.08-2P) drills 1.30 mm where the vendor's own PCB LAYOUT panel recommends 1.50 mm. Approving a hand edit to drill 1.50 mm with the pad enlarged to 2.30 mm (annulus 0.40 mm)	the datasheet dimensions the pin at 0.90 mm wide. If it is square - which the square screw-clamp opening drawn above it indicates, though the shape is not explicitly labelled - the worst-case diagonal is $0.90 \times \sqrt{2} = 1.273$ mm, which leaves 0.027 mm of total diametral clearance in a 1.30 mm hole. That is a terminal that does not seat, found at assembly on all 5 boards. The vendor's recommended 1.50 mm is authoritative whichever shape the pin is, so the fix does not depend on resolving the ambiguity. Enlarging the pad from 2.00 to 2.30 mm keeps the annulus at 0.40 mm instead of dropping it to 0.25 mm: a screw terminal takes real mechanical stress from wire pull, so barrel strength is worth the copper, and at 5.08 mm pitch a 2.30 mm pad still leaves 2.78 mm of clearance. This is the exact class of defect the librarian role calls a top-3 board killer, and NOTHING in the pipeline would have caught it - fp_verify had no land pattern to diff against until this extraction was made, and it does not check drill-vs-pin at all. The J2/J3 header needs no change: 1.10 mm pulled vs 1.02 mm recommended is over-size, the safe direction, with 0.195 mm clearance on its SQ 0.64 mm pin

Phase	What	Why
P3	P3-exit coverage: all 3 part slots COVERED (C89040, C8465, C32713271); block:B1 provisional; block:B2 still gap on the same esd/decoupling/constraints-emission already recorded at P2. NO new research tasks opened at P3	the escalated first call (–maturity-floor proven –research-provisional, mandatory at a learning target) reported all five slots as gaps, but that is the escalation re-firing on slots this run ALREADY researched at P2, not a new finding: with the floor at proven, a verified-but-unapproved record can never satisfy anything until a built board proves it via knowledge.py –prove, so a seeding run will always show block gaps on that call. The re-run without the flags gives the true verdict and it is identical to P2’s post-research state. Opening tasks would re-research what was researched two hours ago. Side effect worth noting: the two connector datasheet extractions ordered to chase the J1 drill defect also closed the part-slot coverage - C8465 and C32713271 went from having no extraction at all to covered
P4	ONE schematic-block agent for the whole board, not one per sheet	the P2 sheet plan is a single flat root sheet for 9 parts and 10 nets, and the full-run recipe explicitly sanctions one schematic agent on a small board provided it is recorded. Splitting it would add a stitching seam with nothing on either side of it, and the recorded /sheet/LABEL export hazard that cost lumina-par is avoided entirely by having no hierarchy
P4	REVERSING the P1 ruling: ADD C5, 100 nF from NRST to GND. The reviewer was right and my original reason was wrong	I ruled it out at P1 on AN4325 filing the part under Table 6 Optional components ‘for RESET button’, reasoning that this board has no button. The reviewer showed that misreads the evidence: the DATASHEET’s own Figure 21 note 1 recommends the capacitor unconditionally as parasitic-reset protection, which is a different and stronger justification than button debounce, and the run’s own C89040 extraction and its own swd-debug-port research record both carry the 0.1 uF. Decisive for scope: requirements.md section 2 point 5, written at P0 before any of this, explicitly scoped ‘whatever the datasheet requires on NRST / boot-mode pins’ as in-scope support - so this is not the recommended-only conditioning the block-only tier excludes, it is the carve-out the requirements anticipated. And the exposure is specific to this board: NRST is deliberately routed to an unshielded flying lead, which is exactly the parasitic-reset case the note addresses. My own P1 decision text had already flagged that risk and accepted it; the reviewer supplied the source that turns the accepted risk into an unnecessary one

Phase	What	Why
P4	J3 pin order CHANGED from IO1/IO2/GND/IO3/IO4 to IO1/IO2/IO3/IO4/GND - GND moves off the centre to position 5	the reviewer found that J2 and J3 are the SAME unkeyed 5-position part, so a cable made for one fits the other. With GND at J3 centre and +3V3 at J2 centre, plugging the GPIO cable into the debug header shorts the rail through the cable's own return - a hard short, the worst outcome available on this board. Moving GND to an end makes the worst cross-plug outcome a GPIO pin contacting the rail or ground, both current-limited by the pin's own driver and non-destructive at 3.3 V. The cost is the return-path benefit the P2 architect chose centre-GND for, which is immaterial here: the owner's answer 3 freed these four pins from any electrical requirement, they are plain digital I/O with no stated edge rate, and a scope probe brings its own ground clip. Accepted trade: J3's own 180-degree reversal is now less clean (GND no longer self-maps), but reversal costs an IO-to-GND contact while cross-plugging cost a rail short
P4	J2 pin order UNCHANGED (GND/SWCLK/3V3/SWDIO/NRST) despite the reviewer's one-position-slip warning. Mitigation stays per-pin silk, carried to P6	the reviewer correctly notes my order was ruled on the 180-degree reversal case only, and that a one-position slip puts a probe push-pull driver onto the rail. I worked the alternatives and centre-rail still wins: with the rail at an END, a one-position slip lands the probe's GND wire on it, which is a hard short - strictly worse than a driver contact, which is current-limited by the driver and which probes generally detect. There is no 5-position order that is safe against BOTH a reversal and a one-position slip, so the ruling is to take the failure that is current-limited in every case. Recorded rather than dismissed: the residual risk is real and its only mitigation is that the per-pin silk actually gets placed and stays legible, which constraints.json already flags as load-bearing and which P6 must deliver

Sheet plan

sheets.md - bb-mcu sheet plan, refdes ranges, CANONICAL net names

1. Sheet plan: ONE FLAT ROOT SHEET

```
| Sheet | File | Blocks it carries | Interface nets at its boundary | Refdes
ranges | 'pwr_base' |
|---|---|---|---|---|
| root (only) | 'kicad/bb-mcu.kicad.sch' | B1 MCU minimum system, B2 SWD debug
port, J1 power in, J3 GPIO out, H1-H4 mounting | none - the board's only
interfaces are the three physical connectors | 'U1-U9', 'C1-C19', 'R1-R9',
'J1-J9', 'H1-H9' | **1** ('#PWR01..', '#FLG01..') |
```

A hierarchy is **REJECTED**, explicitly and with the argument stated, because the role prompt invites disagreement and there is none to have here.

This board has **nine electrical parts and ten nets** on one A4 page. Hierarchy exists to keep large schematics readable and to give each sheet its own refdes and #PWR range; neither problem

exists at this size. The cost of splitting is concrete and this repo has already paid it: a label inside a child sheet exports as `/<sheet>/<LABEL>`, which silently unhooks every `constraints.json` entry that spells it `/<LABEL>` - the P4 amendment class that cost `lumina-par`, and the reason `sbuck-5v3a` and `bb-buck` both went flat. With one root sheet there are no sheet prefixes anywhere, by construction.

Refdes ranges are therefore trivially unique. They are stated anyway because the rule is "unique ACROSS sheets": ****if a later amendment ever splits this sheet, the child sheets take `pwr_base` = 40 and 80 and keep the prefix ranges above****, and every net name in `s2` must be re-checked against the new export.

Mounting holes are reserved H1-H4. ****Whether four or two are fitted is a P6 call****, not a P2 one: `requirements.md` s5 asks for four M3 clearance holes inset from the corners and sanctions two on opposite corners if the earned outline cannot hold four. Under `canonical` binding the outline is not known here, so the count is settled when it is known and the choice is recorded.

2. CANONICAL NET NAMES - binding from here

`research/interface-swd.json` proposed `SWDIO / SWCLK / NRST / +3V3 / GND` as "proposals in the standard's conventional form" and handed reconciliation to P2. **These are now the names the schematic MUST produce**, and they are the names `constraints.json` uses.

Canonical net	KiCad mechanism	Spans	In 'constraints.json'
'+3V3'	power symbol (VALUE = net name) -> exports BARE	J1.1 -> C1 C2 C3 C4 -> U1 VDD(16) + VDDA(5) -> J2.3	'power' 0.1 A
'GND'	power symbol -> exports BARE	everything; B.Cu pour	**not declared** - see 'power_tree.md' s7
'/SWDIO'	root-sheet LOCAL LABEL -> exports with ONE leading slash	U1 pin 19 (PA13) -> J2.4	not declared (advisory only, 'notes')
'/SWCLK'	root-sheet local label	U1 pin 20 (PA14) -> J2.2	not declared (advisory only, 'notes')
'/NRST'	root-sheet local label	U1 pin 4 -> J2.5	not declared
'/BOOT0'	root-sheet local label	U1 pin 1 -> R1	not declared
'/IO1'	root-sheet local label	U1 pin 6 (PA0) -> J3.1	not declared
'/IO2'	root-sheet local label	U1 pin 7 (PA1) -> J3.2	not declared
'/IO3'	root-sheet local label	U1 pin 8 (PA2) -> J3.4	not declared
'/IO4'	root-sheet local label	U1 pin 9 (PA3) -> J3.5	not declared

Why `+3V3` and not `3V3`: it is a rail feeding supply pins and decoupled by C1-C4, so it is drawn with a power symbol, and a power symbol's exported name is bare. Why `/IO1` and not `IO1`: root-sheet local labels are prefixed with one slash on export. **A power symbol WINS over a coincident label**, so P4 must not mix the two mechanisms on one node.

Silk drops the slash. The header silk reads `IO1 IO2 GND IO3 IO4` and `GND SWCLK 3V3 SWDIO NRST` - the slash is a netlist artifact, not a label a bench user should ever see. Naming note from the research: ST never calls the sense pin "VTREF" on its own connectors (it is `T_VCC` or `VDD_TARGET`), so the silk says `3V3`.

Enforcement, not hope: at P4 run `netlist_audit.py --net kicad/bb-mcu.net --constraints architecture/constraints.json`. A net spelled differently in the schematic surfaces as `missing_net` (error). Without that run a misspelling is silent - `check_current` finds no copper on a net that does not exist and reports nothing.

3. Contents of the root sheet

U1 - STM32F030F4P6TR, TSSOP-20 - complete pin map

Pin	Name	Net	Note
---	---	---	---

1	BOOT0	/BOOT0	-> R1 -> 'GND'. Dedicated pin, NO internal pull, hardware-sampled on the 4th SYSCLK edge after reset
2	PF0-OSC_IN	-	unused, left floating (no crystal; tie-offs are RECOMMENDED only and mode-excluded)
3	PF1-OSC_OUT	-	unused, left floating
4	NRST	/NRST	-> J2.5. Permanent internal pull-up 25/40/55 k; NOTHING added
5	VDDA	+3V3	tied to VDD by a BARE TRACE; C3 10 nF + C4 1 uF to 'GND'
6	PA0	/IO1	-> J3.1
7	PA1	/IO2	-> J3.2
8	PA2	/IO3	-> J3.4
9	PA3	/IO4	-> J3.5
10	PA4	-	unused
11	PA5	-	unused
12	PA6	-	unused
13	PA7	-	unused
14	PB1	-	unused
15	VSS	GND	the only ground pin; also the VDDA return (no VSSA on this package)
16	VDD	+3V3	C1 100 nF + C2 4.7 uF
17	PA9	-	unused
18	PA10	-	unused
19	PA13	/SWDIO	-> J2.4. Dedicated SWD after reset, internal PULL-UP active
20	PA14	/SWCLK	-> J2.2. Dedicated SWD after reset, internal PULL-DOWN active

Nine pins are deliberately unconnected. **PA13/PA14 must NOT also be routed to J3** - they can be released to GPIO in software, but J2 needs them as SWD permanently and routing them to both headers is a pin conflict.

The rest of the board

Refdes	Part	Net attachments
C1	100 nF X7R ceramic	+3V3 / 'GND', at U1 pins 16/15
C2	4.7 uF X7R ceramic	+3V3 / 'GND', bulk on the VDD net
C3	10 nF X7R ceramic	+3V3 / 'GND', at U1 pin 5
C4	1 uF X7R ceramic	+3V3 / 'GND', at U1 pin 5
R1	10 k (5 % is fine)	/BOOT0 -> 'GND'
J1	2-pole 5.08 mm screw terminal, THT	1 = '+3V3', 2 = 'GND'. Silk '+' / '-'
J2	1x5 0.1 in header, single row, straight, THT	1 'GND', 2 '/SWCLK', 3 '+3V3', 4 '/SWDIO', 5 '/NRST'
J3	1x5 0.1 in header, single row, straight, THT	1 '/IO1', 2 '/IO2', 3 'GND', 4 '/IO3', 5 '/IO4'
H1-H4	M3 clearance holes, 3.2 mm	mechanical, no net (count settled at P6)

Voltage ratings: everything sits on a 3.3 V rail, so 16 V or 25 V X7R ceramics are ample and DC-bias derating is a non-issue at 3.3 V on parts rated 5-8x that. P3 picks the exact parts; nothing here constrains them beyond value, dielectric and a package the JLC PCBA line places on the top side.

J2 pin order - RULED at P1, do not re-order GND / SWCLK / 3V3 / SWDIO / NRST, positions 1..5. The reasoning is in `blocks.md` s2 and in `state.json`; the one-line version is that on an unkeyed 5-way shell a 180-degree reversal maps position *i* to 6-*i*, so **3V3 at the centre is the unique arrangement in which a reversed probe lands its high-Z VTref INPUT on the board's rail

rather than a probe OUTPUT.** This is deliberately NOT a vendor cable order - flying-lead probes present individually labelled wires, so per-pin silk is what the user reads either way.

J3 pin order - RULED HERE at P2 I01 / I02 / GND / I03 / I04, positions 1..5. The owner fixed the SET (four GPIO plus a ground, because a signal with no return is not usable at the bench); the ORDER was open. Ground goes in the CENTRE, for three reasons:

1. **Return distance.** With GND at an end, I04 is four positions from its return; at the centre no signal is more than two positions away. On a bench header the ground lead IS the return path, and SEGGER's own note is that "long ground leads can significantly worsen ringing and distortion". This is the real reason.
2. **The same reversal mechanism that decided J2.** Five positions, unkeyed, i -> 6-i; a centre GND maps to itself, so a reversed plug still lands ground on ground. Nothing destructive can happen on J3 either way (there is no rail on this header), but a user clipping a ground lead and getting a driven GPIO is a real bench annoyance that costs nothing to prevent.
3. **Consistency:** both headers on this board answer "where does ground go?" the same way, which is the kind of thing a study article should teach once rather than twice differently.

4. Constraint keys deliberately ABSENT - read before "fixing" them

Key	Status	Why
'diff_pairs'	**OMITTED entirely**	NOT '[]' P1 ruling. An explicit empty list DISABLES 'check_diffpair' board-wide; omitting the key leaves auto-discovery ARMED. Both are no-ops on a board with no pair, so take the fail-safe one - disabling a check board-wide to say "we have none" is how a silent blind spot gets built in for the next edit. None of this board's net names matches the auto-discovery suffixes ('_P'/'_N', 'DP'/'DM', 'D+'/'D-'), so nothing is discovered by accident. This DIVERGES from 'research/interface-swd.json', which emitted '[]', and from 'stm32-blinky', which shipped '[]'.
'high_speed'	absent	SWD binds nothing ('blocks.md' s3). Declaring these nets on 2 layers would only manufacture 'corridor_void' findings that are unfixable by construction. The '<= 50 mm' / over-the-pour / keep-SWCLK-clear guidance lives in 'notes' as ADVISORY.
'voltages'	absent	Nothing on the board exceeds 3.3 V. 'check_creepage's derived check engages only ABOVE 30 V, so entries at 3.3 V would be dead weight, not forward-compatibility. 'requirements.md' s8: the >30 V flag DOES NOT APPLY.
'voltage_pairs'	absent	No bridge, no AC tap, no net pair with a differential the node voltages cannot express.
'thermal'	absent	0.33 W at the budget ceiling, no exposed pad, no via array ('power_tree.md' s4).
'planes'	absent	The 2-layer default (B.Cu GND pour) is exactly right, and a 'planes[]' list REPLACES the defaults entirely ('stackup.md' s4).
'power' entry for 'GND'	absent	Would manufacture a 'check_pdn' 'pdn_undecoupled' error requiring a waiver, and buy nothing at 0.1 A ('power_tree.md' s7).
'placement.keepouts'	absent	Keepouts are BOARD-LOCAL coordinates and this board has no outline yet by design. The mounting-hole washer keepouts get their rects at P6, once the outline is earned.
'placement.separation'	absent	Centre-to-centre, and SKIPPED when either ref is locked - it cannot express anything this board needs. Nothing here needs parts held apart.
'placement.fixed'	absent	Nothing has an earned position at P2. Locking refs is a P6 act, after explicit 'place_edit'.

5. Placement groups this sheet implies

One group, mcu: anchor U1, members C1 C2 C3 C4 R1.

- **C1 (100 nF) closest to pins 16/15**, then C2 (4.7 uF) as the reservoir behind it; **C3 (10 nF) closest to pin 5**, then C4 (1 uF). Each cap's ground drops straight to the B.Cu pour through its own via, with the supply via and the ground via straddling the cap right at the pin (AN4325 Fig 8). The datasheet's word is "must": "as close as possible to, or below, the appropriate pins".
- **R1 in the pin-1 window** - the BOOT0 node is hardware-sampled before any software runs and there is no reason for it to be long.
- **The one congestion point:** C3/C4 sit at VDDA (pin 5) on the same package face the four GPIO escape past. Place them toward the pin-1 end of pin 5's escape so the far half of that face stays clear (`blocks.md s4`).


Connector edges are in `constraints.json placement.edges`: J1 on its own edge, J2 and J3 on two others, which is `requirements.md s5`'s requirement that power not share an edge with the two signal headers. ****Every connector's opening or mating face must point OFF-BOARD**** - a requirement in words, because no schema key expresses it, and `rot` is deliberately left unset since the footprints' native entry directions do not exist yet (`bb-buck` recorded the cost of guessing them).

Orientation guidance for P6, not a constraint: put U1's ****pin-1 end toward J2's edge****, so `/SWDIO`, `/SWCLK` and `/NRST` all escape from the same package end, and the four GPIO escape from the diagonally opposite region toward J3.

Full architecture narrative (not inlined; see the artifact index): `architecture/blocks.md`, `architecture/power.tree.md`, `architecture/stackup.md`.

5 Schematic

Gate `erc` (phase P4): **pass** after 2 attempt(s); last 2026-08-16T21:57:21, failing 0 of 0. The full schematic PDF follows.

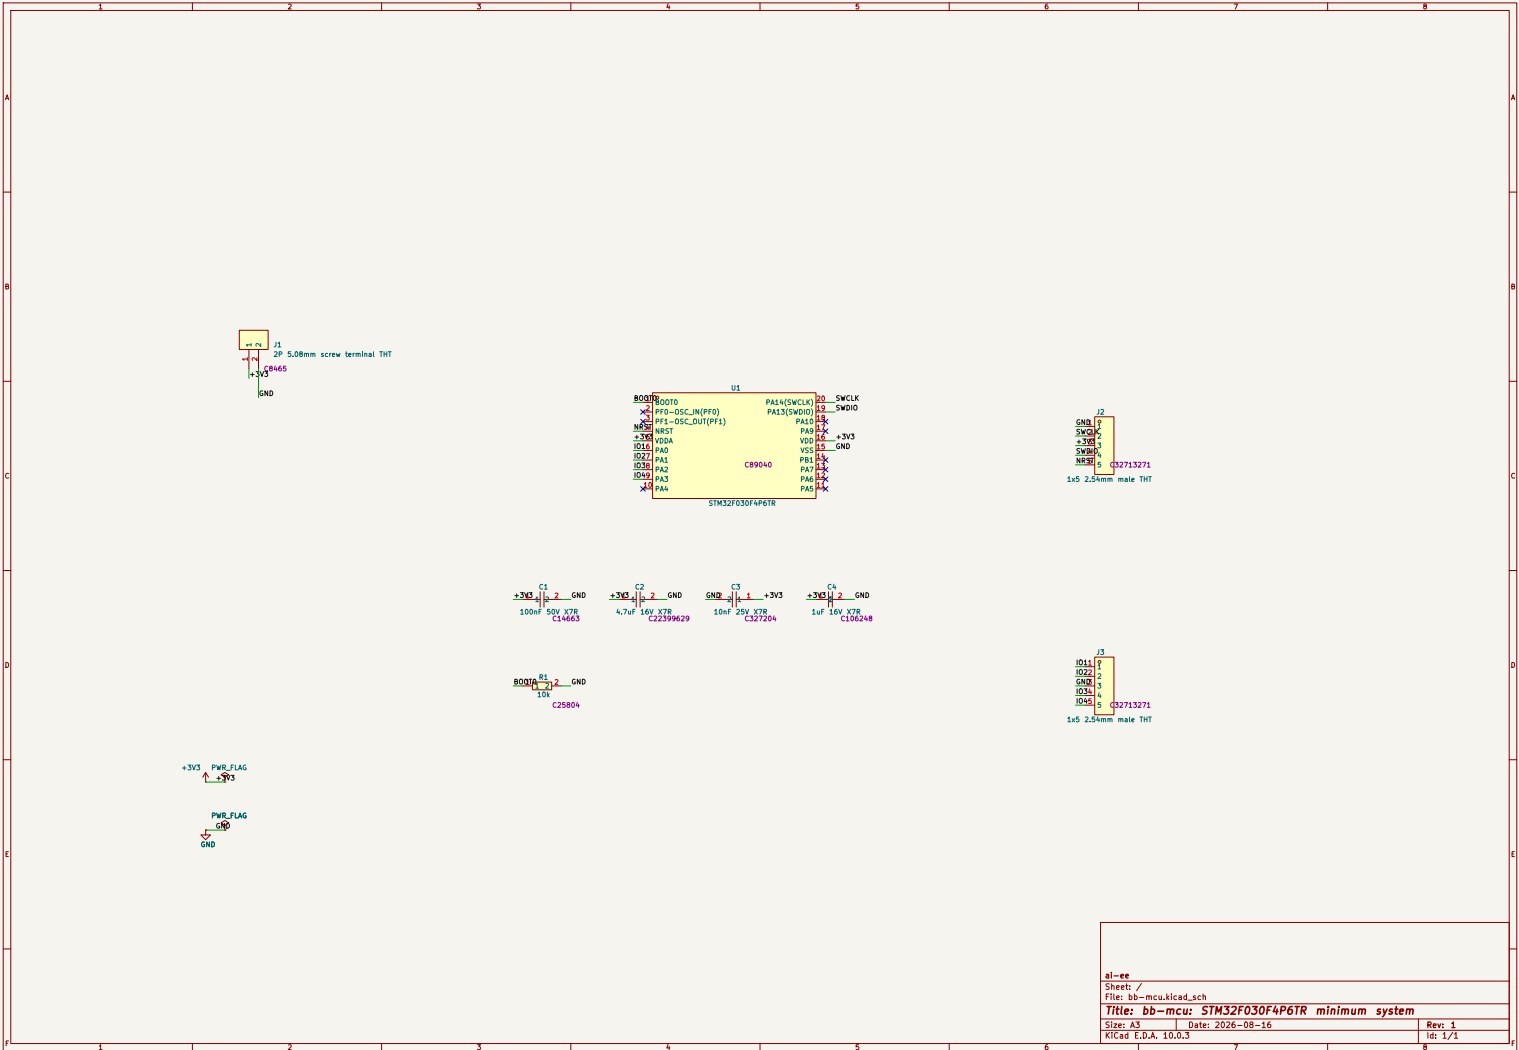

6 Layout

Pending — produced at P6.

7 Verification

Pending — produced at P8.

8 DFM and Fabrication

Pending — produced at P9.

9 Run Record (Appendix)

Phase digests

P0

```
# P0 Intake - digest (2026-08-16)

- Mode 'learning block-basics:' -> block-only scope, canonical binding,
  geometry OUTPUT (no size stated, none invented; earned at P6).
- 'requirements.md' written; 'check_requirements.py' exit 0, 0 violations.
- Scope: MCU + datasheet-required support + the three connectors the brief
  states (J1 screw terminal 3V3 in, J2 debug, J3 4x GPIO). Protection,
  filtering, indicators, buttons, test points, straps, second rail: out.
- 3 questions asked in one batch, all defaults taken: 3.3 V is a bench/board
  rail and NOT a battery (last safety flag CLOSED); J2 = 5-pin
  3V3/SWDIO/SWCLK/NRST/GND with 3V3 sense-only; four plain digital GPIO.
- Owner then delegated design rulings ("best learning for the basic system"):
  H1-H4 become orchestrator-ruled digests. Gates, coverage, research, DFM and
  safety are untouched by that delegation.
- Fable out of credits -> every fable tier substituted one step up
  (fable/high -> opus/xhigh), logged in the spawn ledger.
- Library has 16 records, all buck-domain: expect P2/P3 coverage gaps.
```

P1

```
# P1 Research - digest (2026-08-16)

- Roster: component-scout, then reference-design + interface-spec off its
  shortlist. power-architect skipped (one external rail = trivially powered).
- MCU RULED **STM32F030F4P6TR** (C89040, TSSOP-20, 19k stock, $0.96). Rejected
  CH32V003 (SWIO needs a WCH-Link, rewrites J2), PY32 (puya.com not on the
  fetch allowlist), C011 (hides BOOT0 on SWCLK), G031 (68 in stock).
- Minimum system, cited: REQUIRED = 100 nF VDD + 4.7 uF bulk, 10 nF + 1 uF
  VDDA, 10k BOOT0 pull-down. RECOMMENDED-ONLY and so excluded by mode = VDDA
  filter, NRST cap. SWD adds zero parts. Nine parts total.
- SWD binds nothing on layout (5 ns edge settles ~1.5 ns vs a 125 ns half-bit;
  JLC has no impedance-controlled 2L stackup). Guidance stays advisory.
- Ruled: J2 order **GND/SWCLK/3V3/SWDIO/NRST** (3V3-at-centre is the unique
  reversal-safe arrangement); no SWD series R (overruling RPi/Lauterbach/
  SEGGER); no NRST cap (diverges from stm32-blinky); omit the diff_pairs key.
- ENV: st.com unreachable from this host (HTTP 000 after 20 s); fetch ST
  primaries via wmsc.lcsc.com. AN4325/RM0360/errata are on NO allowlisted
  host - name the host in OPEN if a record needs one. See log/env-notes.md.
```

P2

P2 Architecture + coverage research - digest (2026-08-16)

- Architecture written, 'constraints.lint' exit 0: 2 blocks ('mcu', 'swd-debug-port'), stackup JLC2313.1.6 2L, one flat root sheet, 9 parts. Nothing relaxed by the mode - the brief stated no size to lose.
- Coverage fired as designed: first call at floor 'proven' with '--research-provisional' -> both blocks gap, no checklist existed for either.
- 2 research tasks -> 13 records + the library's FIRST 'mcu' and 'swd-debug-port' checklists. 3 sources each, no forum sources, caps not hit. All 13 verified by fresh readers.
- The refute loop caught 3 real defects: a decoupling envelope bounded on the wrong axis (twice - now correctly 'level: principle'), a false "every Min cell is blank" claim (tEXTIpw has Min 10 ns), and a family-level 'external_series_required: false' contradicting its own sibling record.
- Re-run coverage: 'block:B1' provisional on all 5 rows; 'block:B2' gap on esd / decoupling / constraints-emission -> explicit designing-under-gap decision (riskless: two are classes block-only excludes).
- Key design finding: VDDA carries the internal RC oscillators and the PLL (DS Fig 12), so on this crystal-less board VDDA IS the clock supply and a filter into it would be a FAULT, not merely out of scope.

P3

P3 Parts + Library - digest (2026-08-16)

- 'parts.json': 9 lines (8 orderable + 1 footprint-only hole). 2 Basic / 6 Extended, ~1.35 USD/board. U1 stock re-verified 18,977; alt C32908.
- Kept ST's stated cap values though 4.7uF/10nF/1uF are all Extended at 0603 (verified: JLC's Basic list carries none of them up to 1206).
- U1 extraction validated: 20 pins, 5 layout notes, land from Figure 37. Its pinout agrees independently with the P1 scout and P2 architect.
- **DEFECT FOUND AND FIXED**: J1's pulled footprint drilled 1.30 mm where the vendor recommends 1.50 mm; the 0.90 mm pin's square diagonal is 1.273 mm = 0.027 mm clearance, a terminal that does not seat. Approved hand edit to 1.50 mm drill / 2.30 mm pad. fp_verify now 3/3 pass, 0 failed. Nothing in the pipeline would have caught it: fp_verify had no land pattern to diff until I ordered the connector extractions, and it has no drill-vs-pin check at all.
- U1 land deviation ACCEPTED on worked geometry (the pulled land still captures the lead foot, with more toe and a wider inter-pad gap than ST's).
- Coverage: 3 part slots covered, B1 provisional, B2 gap on the 3 classes already recorded at P2. No new research opened.

P4 (no digest recorded)

Gate attempt history

Timestamp	Gate	Status	Failing/Total
2026-08-16T21:23:29	erc	pass	0/0
2026-08-16T21:57:21	erc	pass	0/0

Issues

(no entries)

Human checkpoints

Id	Phase	Status	When	Note
1	P2	approved	2026-08-16T20:18:19	DELEGATED RULING, not an owner approval: the owner delegated design rulings for this run ('make decisions yourself based on what will give the best learning for the basic system'). Orchestrator ruled H1 pass: 2 blocks, JLC2313_1.6 2L, 9 parts, ~1.30 USD/board BOM, nothing relaxed by the mode (no size was ever stated). Coverage: block:B1 provisional on all 5 rows, block:B2 gap on esd/decoupling/constraints-emission - recorded as an explicit designing-under-coverage-gap decision. Research caps NOT hit: 4 of 6 tasks and 1 of 4 depth units per task left unspent. Riskiest decision: omitting the NRST 100 nF cap, diverging from the shipped stm32-blinky. Owner items surfaced but not blocking: the fetch allowlist (st.com and analog.com are unreachable from this host though allowlisted; arm.com and segger.com are absent and would be needed to source the probe side), and the promotion ruling on 13 verified records + 2 new checklists
2	P4	not reached		
3	P6	not reached		
4	P8	not reached		
5	P10	not reached		

10 Artifact Index

File	Size	Note
state.json	48,357 B	
kicad/bb-mcu.kicad.sch	60,588 B	
brief/brief.md	374 B	
requirements.md	19,063 B	
architecture/blocks.md	19,238 B	
architecture/constraints.json	16,927 B	
architecture/power_tree.md	10,279 B	
architecture/sheets.md	12,412 B	
architecture/stackup.md	8,344 B	
reports/gate-erc.json	14,213 B	
reports/review-schematic.json	2,883 B	
reports/review-schematic.md	19,852 B	
reports/schematic.pdf	60,957 B	
reports/top.net	24,807 B	